





# NEW


## OUTDOOR SERIES

**NEW**  
OUTDOOR-WALL

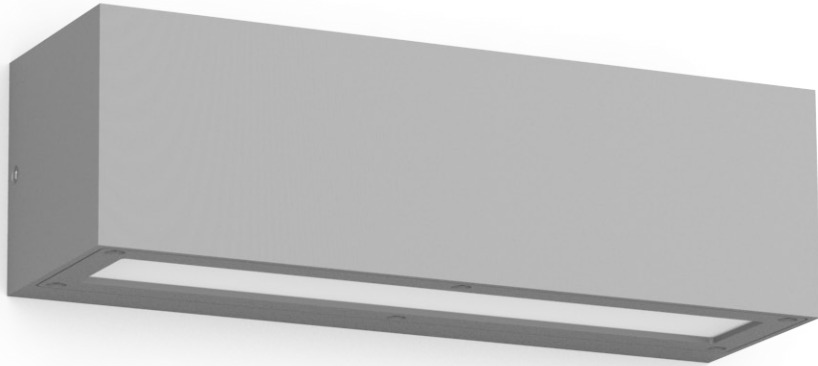

**IP65**

**B9600**



**FINISH BODY**

Standard ☒ SL


Optional ☒ BK ☐ WH

Die-cast aluminum housing with high corrosion resistance.  
DuPont outdoor electrostatic powder coating.  
304# stainless steel fastness parts.  
3mm thickness tempered glass.  
Fire-resistant Silicon seal gasket.

- ☐ LUMILEDS Luxeon2835 28W (Up or Down)
- ☐ LUMILEDS Luxeon2835 37W (Up and Down)




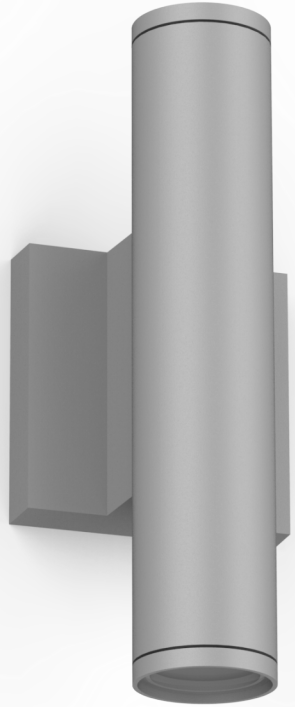


**NEW**  
OUTDOOR-WALL



**B9604**

**IP65**




-  GU10 QPAR16 1x max.50W (Up and Down)
-  GU10 LED-PAR16 1x max.7W (Up and Down)
-  G9 LED-QT14 1x max.3.8W (Up and Down)

**FINISH BODY**



- Standard ☒ SL
- Optional ☒ BK ☐ WH

Die-cast aluminum housing with high corrosion resistance.  
DuPont outdoor electrostatic powder coating.  
304# stainless steel fastness parts.  
3mm thickness tempered glass.  
Fire-resistant Silicon seal gasket.

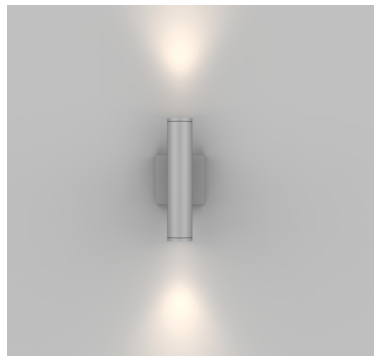




**NEW**  
OUTDOOR-WALL

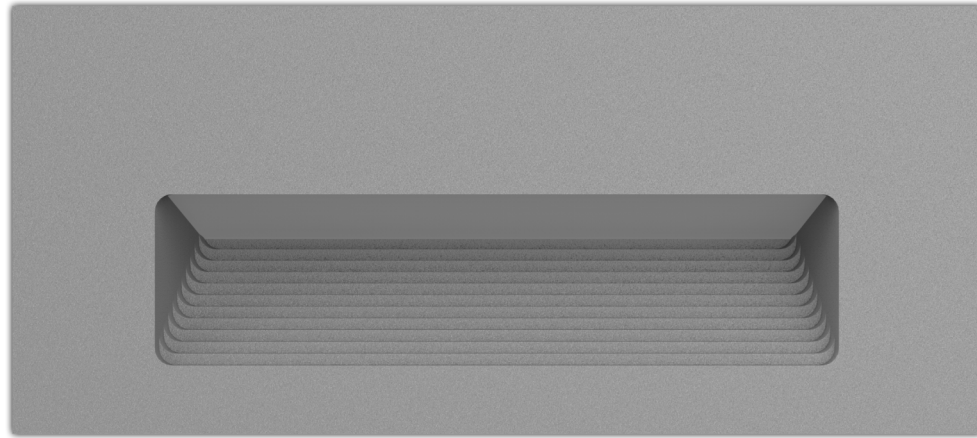

**Q9738**

**IP65**



- ☐ G9 LED-QT14 1x max.3.8W
- ☐ LED GWJTLPS2.CM 36x 0.4W

**FINISH BODY**

Standard ☐ SL  
Optional ☒ BK ☐ WH

Die-cast aluminum housing with high corrosion resistance.  
DuPont outdoor electrostatic powder coating.  
304# stainless steel fastness parts.  
3mm thickness tempered glass.  
Fire-resistant Silicon seal gasket.

