

2025

LEO'S LIGHTING
PROJECT CATALOGUE
2025-2026

LEO's LIGHTING

LEO's Lighting & Electric CO., LTD was founded in 2000, and has more than 24 years experience of product developing and manufacturing in the field of lighting.

LEO's Lighting is a leading company with advantage in product technology and design, the product mainly focuses on indoor and outdoor home lights that easy to change light bulb, and the products have excellent quality and high-cost performance. Meanwhile the products have been sold throughout Europe, Middle East, Southeast Asia, Australia, and other dozens of countries.



IP65





IP65 Surface mounting Lights










IP65 Recessed down Lights










IP65 Flood spot lights



IP65 Wall lights



IP65 Wall lights



IP65

IP65 Garden lights




IP20/44

IP44 Recessed down lights

IP20 Recessed down lights


IP20 Track spot lights

IP20 Surface mounting Lights

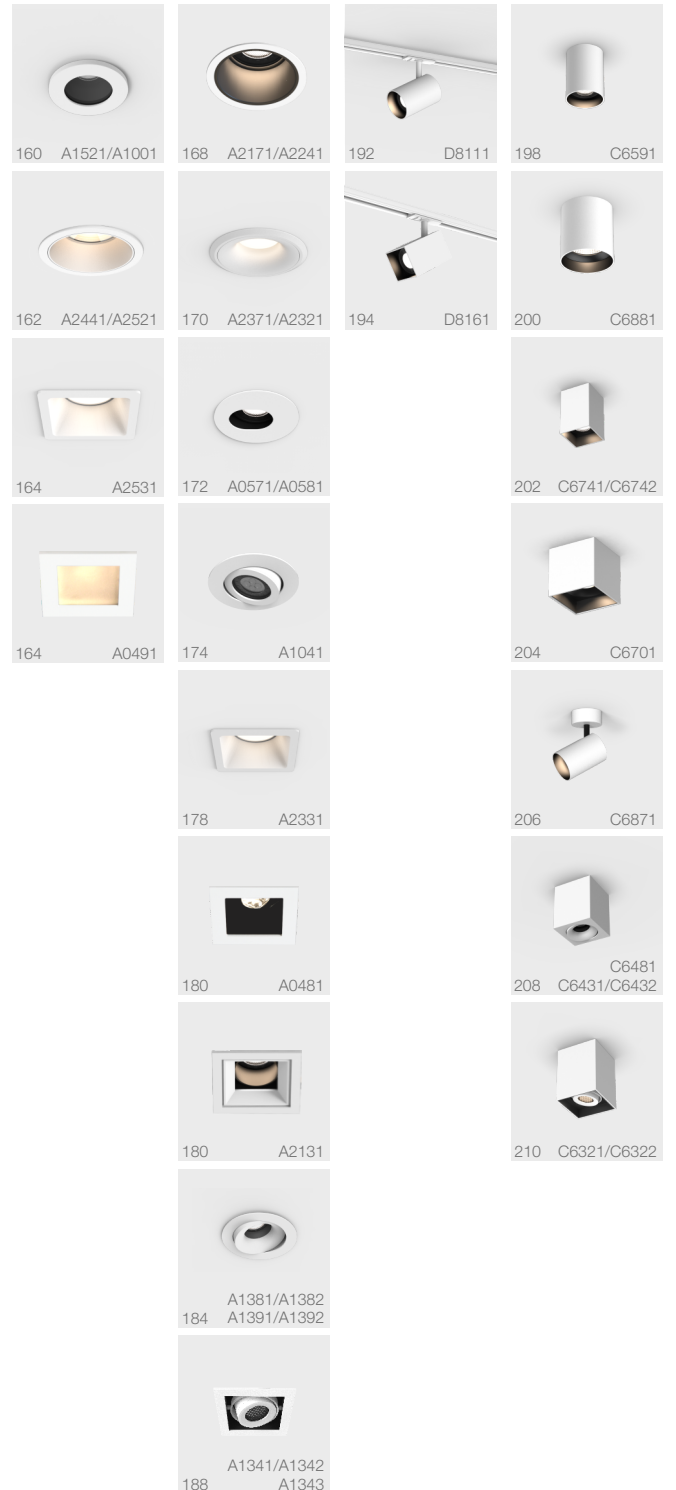


Durability

The reliability and durability of LED lighting is closely related to the process of research and development:
The balance between the current of LED lamp, temperature tolerance and luminous efficiency;
The matching output parameter of LED driver and LED lamp, and the allowance of working in poor conditions, etc.
LEO's LED lighting is closely monitored in every step including design, development, long time test, production, aging etc., to ensure the products with high quality.

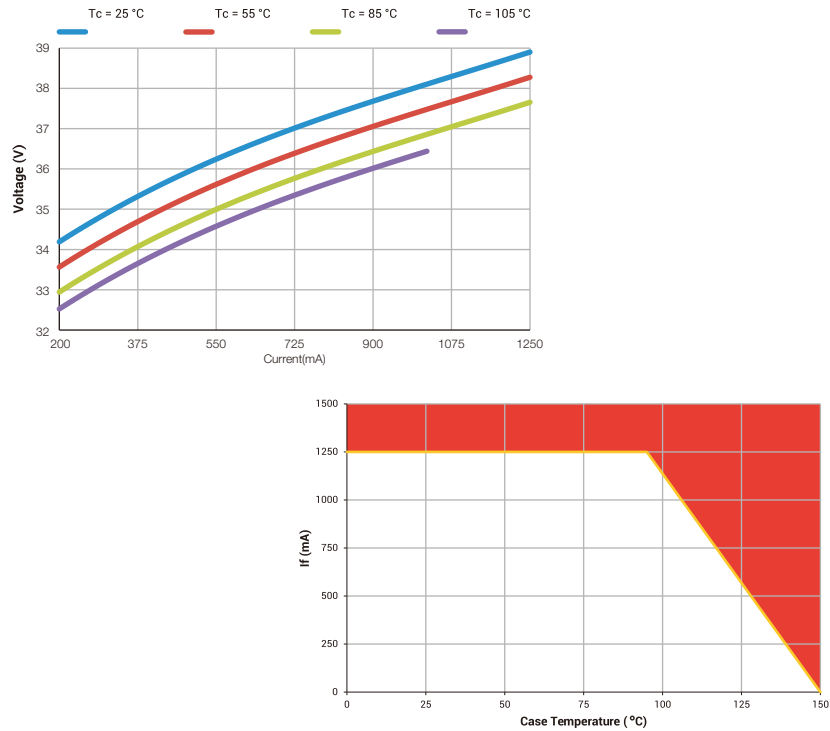

Color temperature

In area of LED, color temperature deviation of lamp and color temperature drift after long time working are worldwide problem.
LEO's lighting use lead LED brand Cree as supplier, to keep high efficiency, high color rendering, meanwhile maximum reducing the color temperature deviation and color temperature drift. Ensure the stability of long-term use.

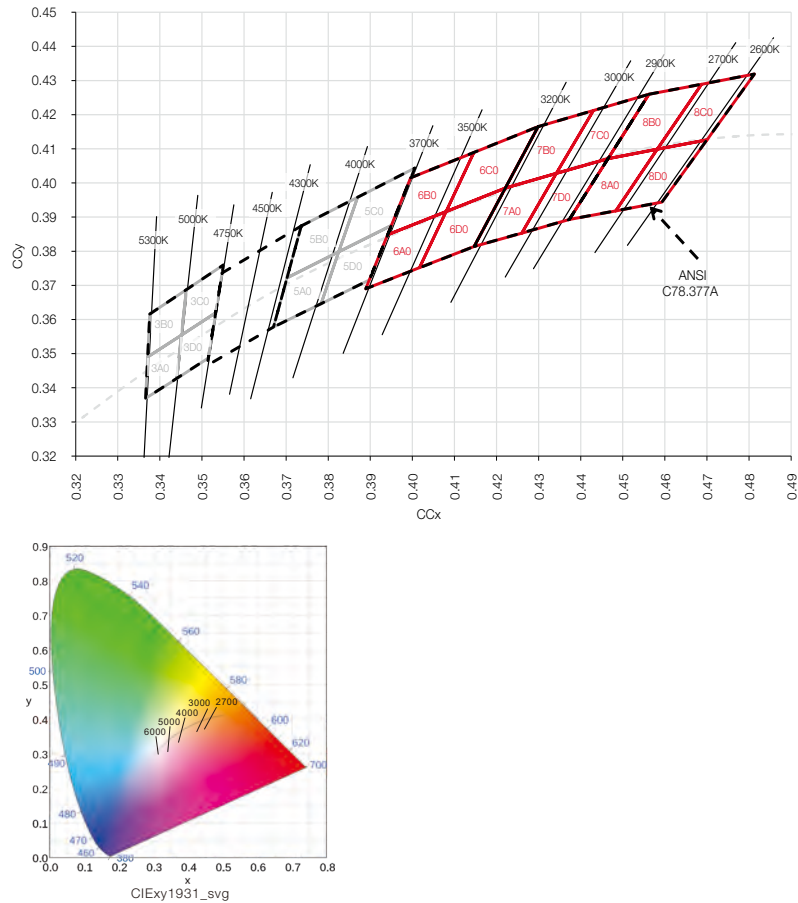

Temperature



The quality of cooling system of LED lighting directly affect the life span of lighting.

At the beginning of design, thermal conduction, thermal convection, radiation, and other physical sciences are incorporated into LEO's lighting;

By means of avoiding "Hourglass" effect, ensuring sufficient heat dissipation etc., to let the heat caused by optoelectronic system effectively disseminated;

And test the temperature of lamp during aging, to ensure the temperature does not exceed the standard, but also with working allowance.

Ensure the durability of the product.

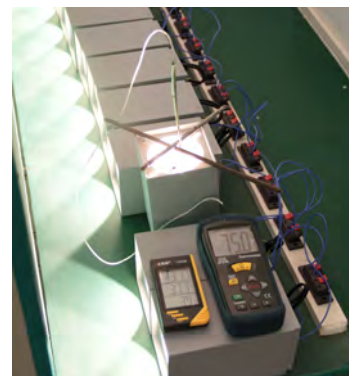

Accessories

LED accessories of LEO'S lighting, all using Cree company approved and recommended suppliers. The accessories cover driver, LED connector, reflector, lens, thermal grease, etc.

LEO's with CREE to discuss LED development trends, LED technology of design and development, improvement of production process, quality control and standard.





Cree is a market-leading innovator of lighting-class LEDs, LED lighting, and semiconductor solutions for wireless and power applications.

History & Milestones

Cree's leadership begins with innovative materials, primarily silicon carbide (SiC), that provide high-efficiency performance for numerous semiconductor applications. Using SiC as a platform material, Cree has spent over 20 years developing an array of new technologies that far surpass traditional ones.

LED Lighting

Cree leads the LED lighting revolution and is making energy-wasting traditional lighting technologies obsolete through the use of energy-efficient, environmentally friendly LED lighting.

Cree first brought the blue LED to market in 1989, and today Cree's XLamp LEDs have continually exceeded industry standards for brightness and efficiency. Indeed, XLamp LEDs were the first "lighting-class" LEDs – LEDs bright enough to be used in general-illumination applications, such as desk lamps, ceiling fixtures and street lights. In addition, Cree's extensive line of high-brightness LEDs are also introducing new performance levels to outdoor video displays and decorative lighting.

LED lighting, with its high quality, long life and low energy consumption has improved our world and ended the century old era of traditional light. But for Cree, this is just the beginning. LED technology will go beyond creating good light sources to deliver vastly improved and entirely new light experiences. At Cree, we call this 'better light' and believe it's your right.

OSRAM

OSRAM, based in Munich, is the global No. 1 in automotive car lighting and a globally leading lighting manufacturer with a history dating back more than 100 years. The portfolio ranges from high-tech applications based on semiconductor technology, such as infrared or laser lighting, to smart and connected lighting solutions in buildings and cities. As a high-tech enterprise, OSRAM is enhancing people's lives in the digital age.

PHILIPS

As the world's leader in Lighting, Philips is driving the switch to energy-efficient solutions. With worldwide electrical lighting using 19 per cent of all electricity, the use of energy-efficient lighting will significantly reduce energy consumption around the world and thereby cut harmful CO2 emissions. Philips is also a leader in shaping the future with exciting new lighting applications and technologies such as LED technology, provides attractive benefits and endless new 'never-before-possible' lighting solutions.


TRIDONIC

As part of the Zumtobel Group, Tridonic is headquartered in Dornbirn, Austria, and in fiscal year 2015/16 generated sales of 410.4 million EUR. 1,640 highly skilled employees and a worldwide sales presence in 51 countries reflect Tridonic's commitment to accelerating the development and deployment of new, smart, and connected lighting applications.

QUALITY ASSURANCE

IN THE MANUFACTURING PROCESS

We persist in independent design and development, each workpiece is designed by our professional design team, then the whole light fixture is developed by our R&D department. To avoid or reduce the process of CNC machining in the later stage and ensure the quality consistency of each batch of products, we have chosen the way of production by mold, even with higher initial investment, all workpieces are mass-produced using molds. Meanwell, the molds required for producing lighting fixtures are all independently designed and developed by our company to ensure controllable quality and reduce overall production costs while reducing errors.

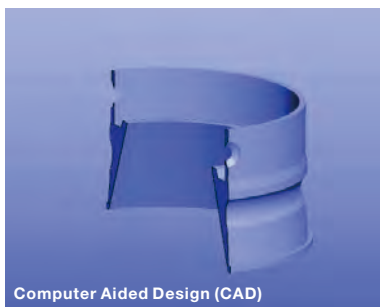



Computer Aided Design (CAD)



Die-cast aluminum mould



Hardware mould

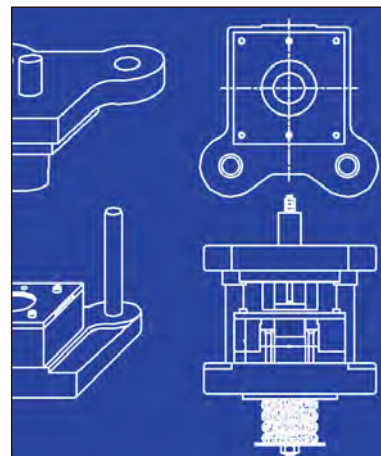

Hardware mould



QUALITY ASSURANCE

IN THE MANUFACTURING PROCESS

Quality assurance in appearance: We have our own powder coating line, the process of painting for all workpiece is finished in our factory. We use BASF chemical cleaning for pre-treatment, and use DuPont (Acquired by Axalta) outdoor powder for painting on surface. Therefore, we can provide 5-year warranty service on appearance.

QUALITY ASSURANCE

IN THE MANUFACTURING PROCESS



Quality inspection of machining workshop

In the hardware workshop, painting workshop and assembly workshops, we have quality management specialists to control the quality before, during, and after production.

Before production:

For each model in each order, we will arrange to make first piece in each workshop, the quality controller during production will inspection the first piece according to the established inspection standards and issue an inspection report. After confirming that the first piece is OK, employees can start mass production of this workpiece.



Quality inspection of painting workshop



Quality inspection of finished products in the manufacturing process

During production:

Quality control will conduct regular inspections during production and issue inspection reports. For outdoor lamps, we make IP testing for both semi-finished products and finished products to ensure the waterproofing function of the assembled lighting fixtures.

After production:

When the production in each workshop is finished, quality management specialists will make inspection to make sure the quality of semi-products. For the quality control of finished products, when the products are finished in assembly workshop, quality management specialists will make inspection according to the established inspection standards and issue an inspection report, to ensure the quality of finished products. For the quality assurance system, we provide 3 years warranty for the whole fitting.



Waterproof inspection of finished product in the manufacturing process



To make the last quality control before delivery and achieve the goal of zero complaints after shipment, we will make final inspection for the finished products before delivery.

- 1) We welcome customers to inspect the goods at the factory and form an inspection report, we can only arrange for shipment after get customer's approval.
- 2) If the customer does not have a dedicated person to inspect the goods at the factory, our company will entrust a third-party inspection personnel to make inspection and provide the professional inspection report and pictures to the customer, we can only arrange for shipment after get customer's approval.



Quality inspection of finished products before delivery



Waterproof inspection of finished products before delivery

Lighting Store Product Quality Control Checklist									
Factory Name: LEO'S LIGHTING & ELECTRIC CO., LTD. Factory Address: LITIANE DASHANBAO INDUSTRY DISTRICT, LUOCHU, SHENBAO TOWN, JIANGSU PROVINCE, CHINA, ZIP CODE: 212228 PO Number: L024-000462 PO Number: 1702031122									
Date: 13 Aug 2023 Checked By: LEO YONGLIAN Quantity of the Product: 12 Pcs Name of the order: L024/000462									
Packaging Checklist									
Outer Box			Inner Box			Closed or Gift box			
QC Parameters	Results	Image Photos	QC Parameters	Results	Image Photos	QC Parameters	Results	Image Photos	
Box Material	Good		Box Material	Good		Box Material	Good		
Box Size	200*200		Box Size	200*200		Box Size	200*200		
Box Weight	0.5kg		Box Weight	0.5kg		Box Weight	0.5kg		
Box Color	White		Box Color	White		Box Color	White		
Box Label	Yes		Box Label	Yes		Box Label	Yes		
Box Seal	Yes		Box Seal	Yes		Box Seal	Yes		
Box Damage	No		Box Damage	No		Box Damage	No		
Box Quantity	12		Box Quantity	12		Box Quantity	12		

Our customer's inspection report and inspection confirmation form

! Onerous Environments

Pls contact our technical Dept. prior to install our products under harsh conditions, for examples: swimming, seaside, high salt environments.







SURFACE MOUNTING LIGHTS
IP65









IP65 SURFACE MOUNTING LIGHT

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
Tempered glass diffuser, thickness 4mm.
Fire-resistant silicon gasket for good waterproof, IP65.
High purity aluminum heat conduction piece.
304 standard stainless steel fastness part.
DuPont professional outdoor powder coating finished normal thickness 100 micron.
500 hours salt spray test endurance rating.
All wiring, socket and connectors are heat resistant as per IEC.
Luminaires are certified by CE, RoHS.





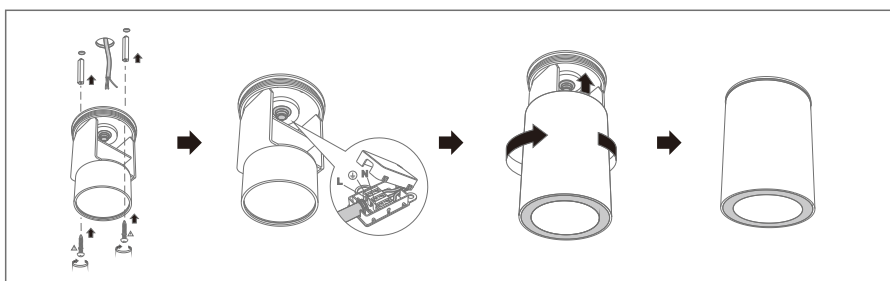


Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 Tempered glass diffuser, thickness 4mm.
 Fire-resistant silicon gasket for good waterproof, IP65.
 High purity aluminum heat conduction piece.
 304 standard stainless steel fastness part.
 DuPont professional outdoor powder coating finished normal thickness 100 micron.
 500 hours salt spray test endurance rating.
 All wiring, socket and connectors are heat resistant as per IEC.
 Luminaires are certified by CE, RoHS.






H9942



COB **CREE** Driver **TRIDONIC**



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA1507	10	642lm	3000K	≥80	250mA	24°
1x COB	CXA1507	10	689lm	4000K	≥80	250mA	24°
1x GU10	LED-PAR16	7(max)	/	/	/	/	/

OPTIONAL

FINISH BODY

Standard ○ WH ● SL
 Optional ● BK

COLOR TEMP

Standard 3000K 4000K

BEAM ANGLE


Standard Ang. 24°
 Optional Ang. 36° Ang. 15°

ACCESSORY



 Honeycomb (For GU10)



H9943



COB **CREE** Driver **TRIDONIC**



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2520	15	1150lm	3000K	≥80	350mA	24°
1x COB	CXA2520	15	1230lm	4000K	≥80	350mA	24°
1x COB	CXA2520	20	1549lm	3000K	≥80	500mA	24°
1x COB	CXA2520	20	1657lm	4000K	≥80	500mA	24°

OPTIONAL

FINISH BODY


Standard ○ WH ● SL
 Optional ● BK

COLOR TEMP


Standard 3000K 4000K

BEAM ANGLE

Standard Ang. 24°
 Optional Ang. 36°

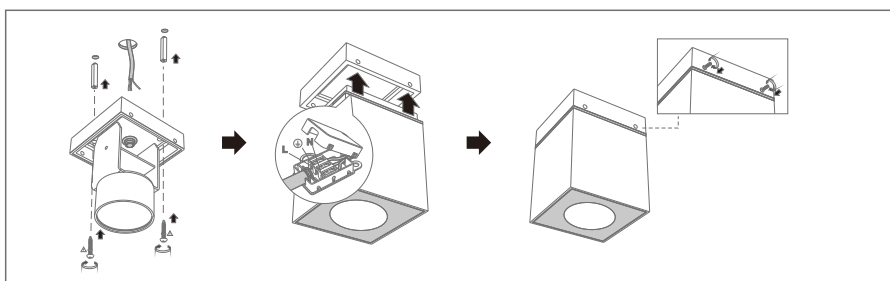

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 Tempered glass diffuser, thickness 4mm.
 Fire-resistant silicon gasket for good waterproof, IP65.
 High purity aluminum heat conduction piece.
 304 standard stainless steel fastness part.
 DuPont professional outdoor powder coating finished normal thickness 100 micron.
 500 hours salt spray test endurance rating.
 All wiring, socket and connectors are heat resistant as per IEC.
 Luminaires are certified by CE, RoHS.

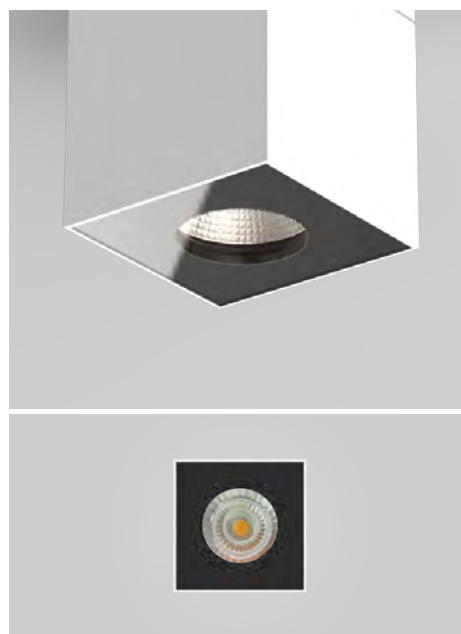




H9944



COB CREE Driver TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	
1x COB	CXA1507	10	642lm	3000K	≥80	250mA	24°
1x COB	CXA1507	10	689lm	4000K	≥80	250mA	24°
1x GU10	LED-PAR16	7(max)	/	/	/	/	/

OPTIONAL


FINISH BODY
Standard ○ WH ● SL
Optional ● BK

COLOR TEMP
Standard 3000K 4000K


BEAM ANGLE
Standard Ang. 24°
Optional Ang. 36° Ang. 15°



H9950



COB CREE Driver TRIDONIC




SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2520	15	1150lm	3000K	≥80	350mA	24°
1x COB	CXA2520	15	1230lm	4000K	≥80	350mA	24°
1x COB	CXA2520	20	1549lm	3000K	≥80	500mA	24°
1x COB	CXA2520	20	1657lm	4000K	≥80	500mA	24°

OPTIONAL

FINISH BODY
Standard ○ WH ● SL
Optional ● BK

COLOR TEMP
Standard 3000K 4000K


BEAM ANGLE
Standard Ang. 24°
Optional Ang. 36°

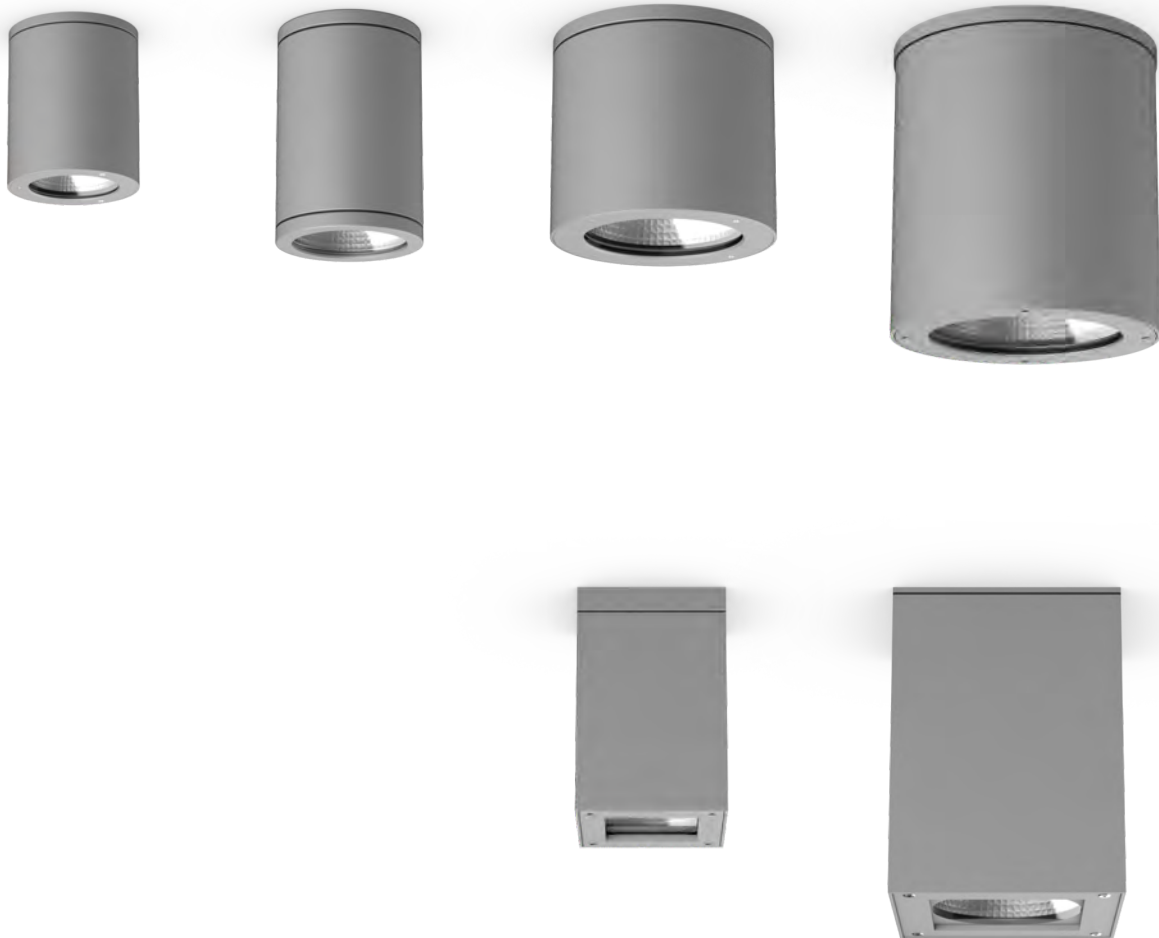

IP65 SURFACE LIGHT

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 Tempered glass diffuser, thickness 4mm.
 Fire-resistant silicon gasket for good waterproof, IP65.
 High purity aluminum heat conduction piece.
 304 standard stainless steel fastness part.
 DuPont professional outdoor powder coating finished normal thickness 100 micron.
 500 hours salt spray test endurance rating.
 All wiring, socket and connectors are heat resistant as per IEC.
 Luminaires are certified by CE, RoHS.



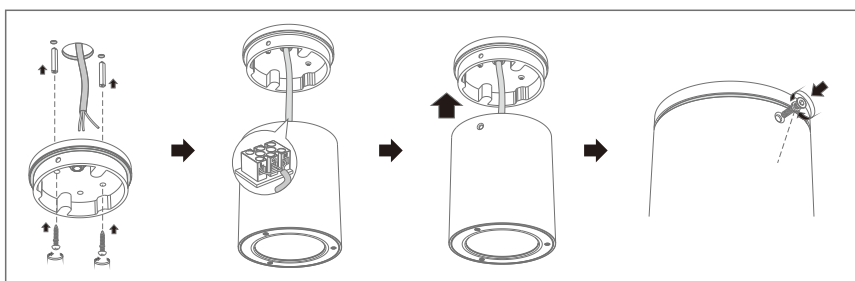


Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 Tempered glass diffuser, thickness 4mm.
 Fire-resistant silicon gasket for good waterproof, IP65.
 High purity aluminum heat conduction piece.
 304 standard stainless steel fastness part.
 DuPont professional outdoor powder coating finished normal thickness 100 micron.
 500 hours salt spray test endurance rating.
 All wiring, socket and connectors are heat resistant as per IEC.
 Luminaires are certified by CE, RoHS.






H9935



COB
CREE
Driver
TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	
1x COB	CXA1507	10	642lm	3000K	≥80	250mA	24°
1x COB	CXA1507	10	689lm	4000K	≥80	250mA	24°
1x COB	CXA1512	15	1052lm	3000K	≥80	350mA	24°
1x COB	CXA1512	15	1125lm	4000K	≥80	350mA	24°
1x GU10	LED-PAR16	7(max)	/	/	/	/	/

OPTIONAL


FINISH BODY
Standard ○ WH ● SL
Optional ● BK

COLOR TEMP
Standard 3000K 4000K



BEAM ANGLE
Standard Ang. 24°
Optional Ang. 36°



H9917



COB
CREE
Driver
TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA1512	15	1052lm	3000K	≥80	350mA	24°
1x COB	CXA1512	15	1125lm	4000K	≥80	350mA	24°
1x COB	CXA2520	20	1549lm	3000K	≥80	500mA	24°
1x COB	CXA2520	20	1657lm	4000K	≥80	500mA	24°

OPTIONAL

FINISH BODY
Standard ○ WH ● SL
Optional ● BK

COLOR TEMP
Standard 3000K 4000K

BEAM ANGLE
Standard Ang. 24°
Optional Ang. 36°



H9936



Ø150



140(20W)
200(30W)

COB

CREE

Driver

OSRAM



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2520	20	1549lm	3000K	≥80	500mA	24°
1x COB	CXA2520	20	1657lm	4000K	≥80	500mA	24°
1x COB	CXA2520	30	2055lm	3000K	≥80	700mA	24°
1x COB	CXA2520	30	2198lm	4000K	≥80	700mA	24°

OPTIONAL

FINISH BODY

Standard ○ WH ● SL
Optional ● BK

COLOR TEMP

Standard 3000K 4000K

BEAM ANGLE

Standard Ang. 24°
Optional Ang. 36°



H9937



Ø180


200(30W)
300(42W)

COB

CREE

Driver

OSRAM



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2520	30	2055lm	3000K	≥80	700mA	24°
1x COB	CXA2520	30	2198lm	4000K	≥80	700mA	24°
1x COB	CXA2530	42	2879lm	3000K	≥80	1050mA	24°
1x COB	CXA2530	42	3080lm	4000K	≥80	1050mA	24°

OPTIONAL

FINISH BODY

Standard ○ WH ● SL
Optional ● BK


COLOR TEMP

Standard 3000K 4000K

BEAM ANGLE

Standard Ang. 24°
Optional Ang. 36°




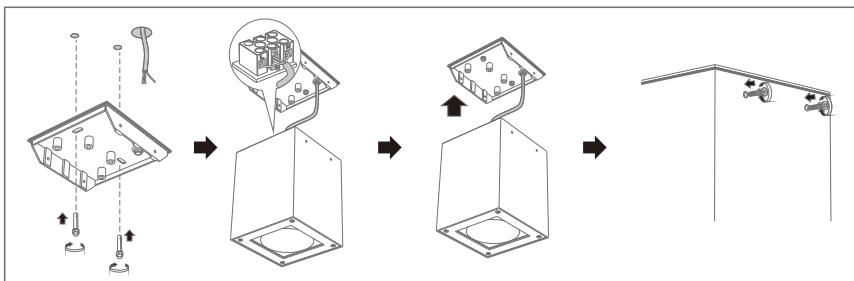


Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 Tempered glass diffuser, thickness 4mm.
 Fire-resistant silicon gasket for good waterproof, IP65.
 High purity aluminum heat conduction piece.
 304 standard stainless steel fastness part.
 DuPont professional outdoor powder coating finished normal thickness 100 micron.
 500 hours salt spray test endurance rating.
 All wiring, socket and connectors are heat resistant as per IEC.
 Luminaires are certified by CE, RoHS.






H9938

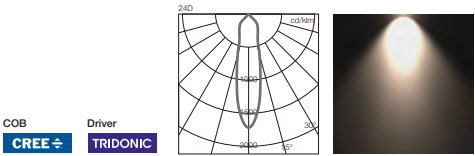


SOURCE		WATT	LAMP LUMEN	COLOR TEMP	CRI	OUTPUT	BEAM ANGLE
1x COB	CXA1512	15	1052lm	3000K	≥80	350mA	24°
1x COB	CXA1512	15	1125lm	4000K	≥80	350mA	24°
1x COB	CXA2520	20	1549lm	3000K	≥80	500mA	24°
1x COB	CXA2520	20	1657lm	4000K	≥80	500mA	24°
1x GU10	LED-PAR16	7(max)	/	/	/	/	/

OPTIONAL

FINISH BODY		COLOR TEMP		BEAM ANGLE	
Standard	○ WH ● SL	Standard	3000K 4000K	Standard	Ang. 24°
Optional	● BK			Optional	Ang. 36°

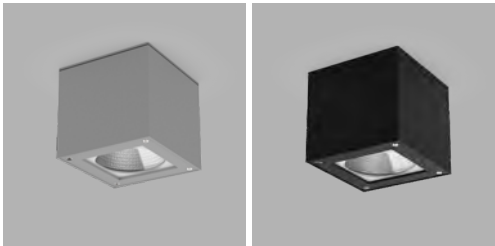

H9939



COB

Driver

CREE

OSRAM

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2520	20	1549lm	3000K	≥80	500mA	24°
1x COB	CXA2520	20	1657m	4000K	≥80	500mA	24°
1x COB	CXA2520	30	2055m	3000K	≥80	700mA	24°
1x COB	CXA2520	30	2198m	4000K	≥80	700mA	24°
1x COB	CXA2530	42	2879m	3000K	≥80	1050mA	24°
1x COB	CXA2530	42	3080m	4000K	≥80	1050mA	24°

OPTIONAL

FINISH BODY

Standard

○ WH

● SL

Optional

● BK

COLOR TEMP

Standard

3000K

4000K


BEAM ANGLE

Standard

■ Ang. 24°

Optional

■ Ang. 36°





IP65

RECESSED DOWN LIGHT





IP65

RECESSED DOWN LIGHT

Die-cast aluminum housing with high corrosion resistance.

Tempered glass diffuser, thickness 3-12mm.

Fire-resistant silicon gasket for good waterproof, IP65.

High purity aluminum heat conduction piece.

304 standard stainless steel fastness part.

DuPont professional outdoor powder coating finished normal thickness 100 micron.

500 hours salt spray test endurance rating.


All wiring, socket and connectors are heat resistant as per IEC.

Luminaires are certified by CE, RoHS.




IP65

RECESSED DOWN LIGHT

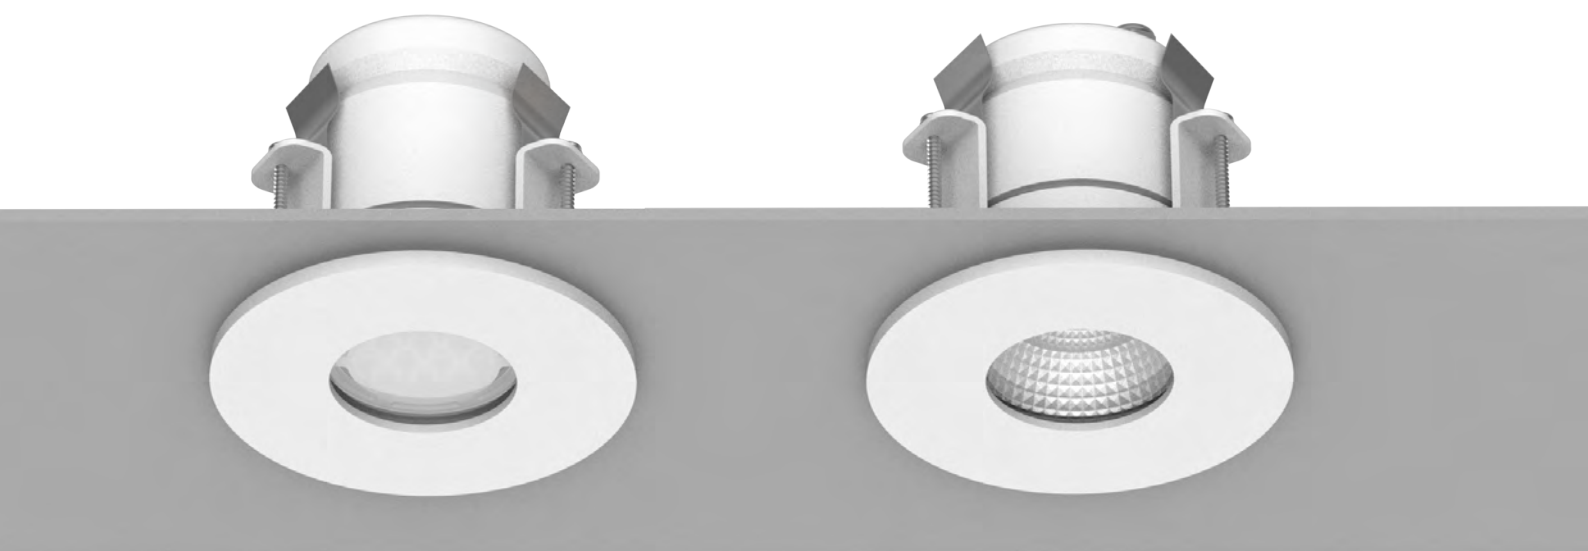

A0695

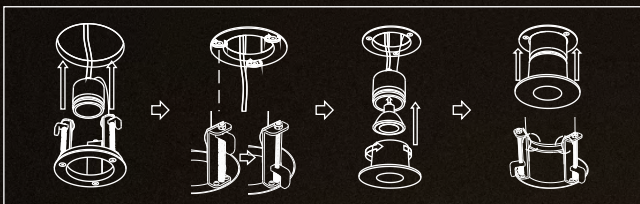

Die-cast aluminum housing with high corrosion resistance.

Tempered glass diffuser, thickness 3mm.

Fire-resistant silicon gasket for good waterproof, IP65.

High purity aluminum heat conduction piece.

304 standard stainless steel fastness part.

DuPont professional outdoor powder coating finished normal thickness 100 micron.

500 hours salt spray test endurance rating.

All wiring, socket and connectors are heat resistant as per IEC.

Luminaires are certified by CE, RoHS.







A0695



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x GU10	LED-PAR16	7(max)	/	/	/	/	/
1x COB	CXA1507	10	642lm	3000K	≥80	250mA	24°
1x COB	CXA1507	10	689lm	4000K	≥80	250mA	24°

OPTIONAL

FINISH BODY

Standard
 ☐ WH
 ☐ SL

 Optional
 ☐ BK

COLOR TEMP

Standard
 ☒ 3000K
 ☐ 4000K

 Optional
 ☐ 5000K

BEAM ANGLE


Standard
 ☐ Ang. 24°

 Optional
 ☐ Ang. 36°
 ☐ Ang. 15°




IP65

RECESSED DOWN LIGHT

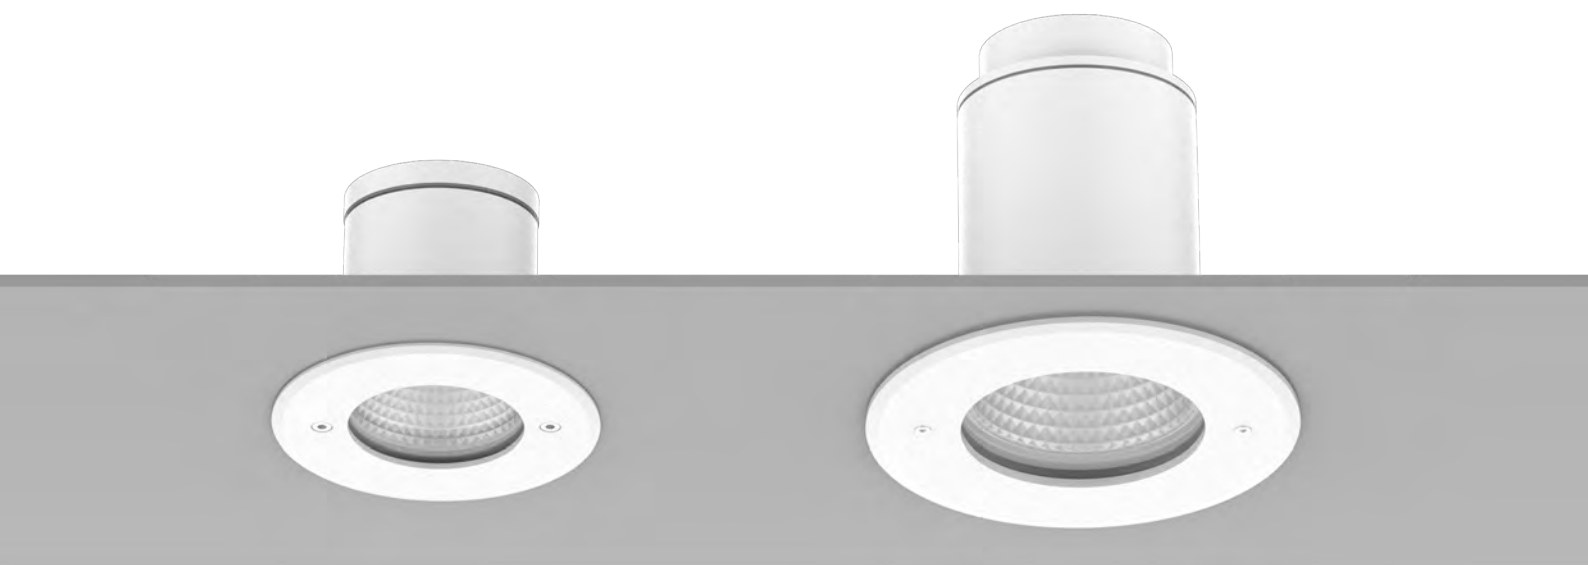

A0686 / A0691

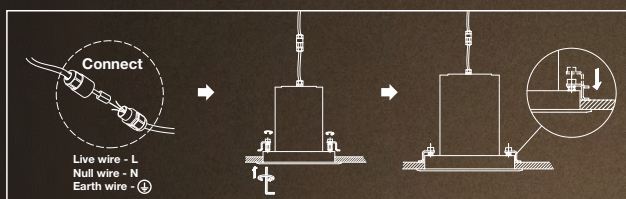

Die-cast aluminum housing with high corrosion resistance.

Tempered glass diffuser, thickness 8-12mm.

Fire-resistant silicon gasket for good waterproof, IP65.

High purity aluminum heat conduction piece.

304 standard stainless steel fastness part.

DuPont professional outdoor powder coating finished normal thickness 100 micron.

500 hours salt spray test endurance rating.


All wiring, socket and connectors are heat resistant as per IEC.

Luminaires are certified by CE, RoHS.







A0686



COB **CREE** Driver **TRIDONIC**



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA1512	15	1052lm	3000K	≥80	350mA	24°
1x COB	CXA1512	15	1125lm	4000K	≥80	350mA	24°

OPTIONAL

FINISH BODY

Standard ○ WH ● SL
Optional ● BK

COLOR TEMP

Standard **3000K** **4000K**

BEAM ANGLE

Standard Ang. 24°
Optional Ang. 36°

OPTIONAL ACCESSORY




Honeycomb

ACCESSORY




IP68 connector

A0691



COB **CREE** Driver **TRIDONIC** **OSRAM**



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2520	20	1537lm	3000K	≥80	500mA	24°
1x COB	CXA2520	20	1644lm	4000K	≥80	500mA	24°
1x COB	CXA2520	30	2055lm	3000K	≥80	700mA	24°
1x COB	CXA2520	30	2198lm	4000K	≥80	700mA	24°

OPTIONAL

FINISH BODY

Standard ○ WH ● SL
Optional ● BK

COLOR TEMP

Standard **3000K** **4000K**

BEAM ANGLE

Standard Ang. 24°
Optional Ang. 36°

OPTIONAL ACCESSORY



Honeycomb


ACCESSORY




IP68 connector

IP65

RECESSED DOWN LIGHT

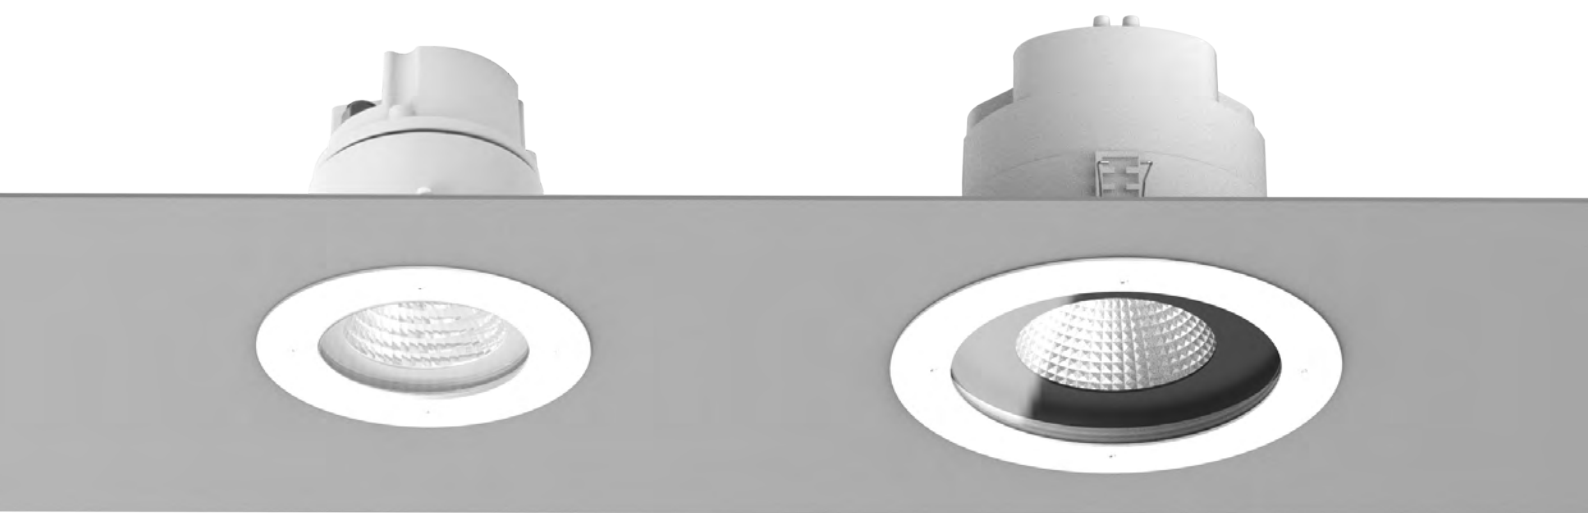

A0692 / A1431

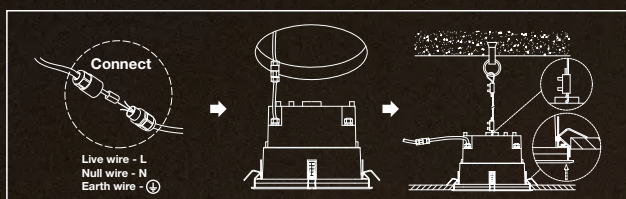

Die-cast aluminum housing with high corrosion resistance.

Tempered glass diffuser, thickness 12mm.

Fire-resistant silicon gasket for good waterproof, IP65.

High purity aluminum heat conduction piece.

304 standard stainless steel fastness part.

DuPont professional outdoor powder coating finished normal thickness 100 micron.

500 hours salt spray test endurance rating.

All wiring, socket and connectors are heat resistant as per IEC.

Luminaires are certified by CE, RoHS.






A0692



COB DRIVER
CREE OSRAM



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2520	30	2055lm	3000K	≥80	700mA	24°
1x COB	CXA2520	30	2198lm	4000K	≥80	700mA	24°

OPTIONAL

FINISH BODY

Standard ○ WH ● SL
Optional ● BK

COLOR TEMP

Standard 3000K 4000K

BEAM ANGLE

Standard Ang. 24°
Optional Ang. 36°

OPTIONAL ACCESSORY




Honeycomb

ACCESSORY



IP68 connector

A1431



COB DRIVER
CREE OSRAM

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2530	40	2650lm	3000K	≥80	900mA	24°
1x COB	CXA2530	40	2830lm	4000K	≥80	900mA	24°
1x COB	CXA2540	50	3180lm	3000K	≥80	1200mA	24°
1x COB	CXA2540	50	3396lm	4000K	≥80	1200mA	24°

OPTIONAL

FINISH BODY

Standard ○ WH ● SL
Optional ● BK

COLOR TEMP

Standard 3000K 4000K

BEAM ANGLE

Standard Ang. 24°
Optional Ang. 36°

OPTIONAL ACCESSORY



Honeycomb


ACCESSORY



IP68 connector

IP65

FLOOD SPOT LIGHT

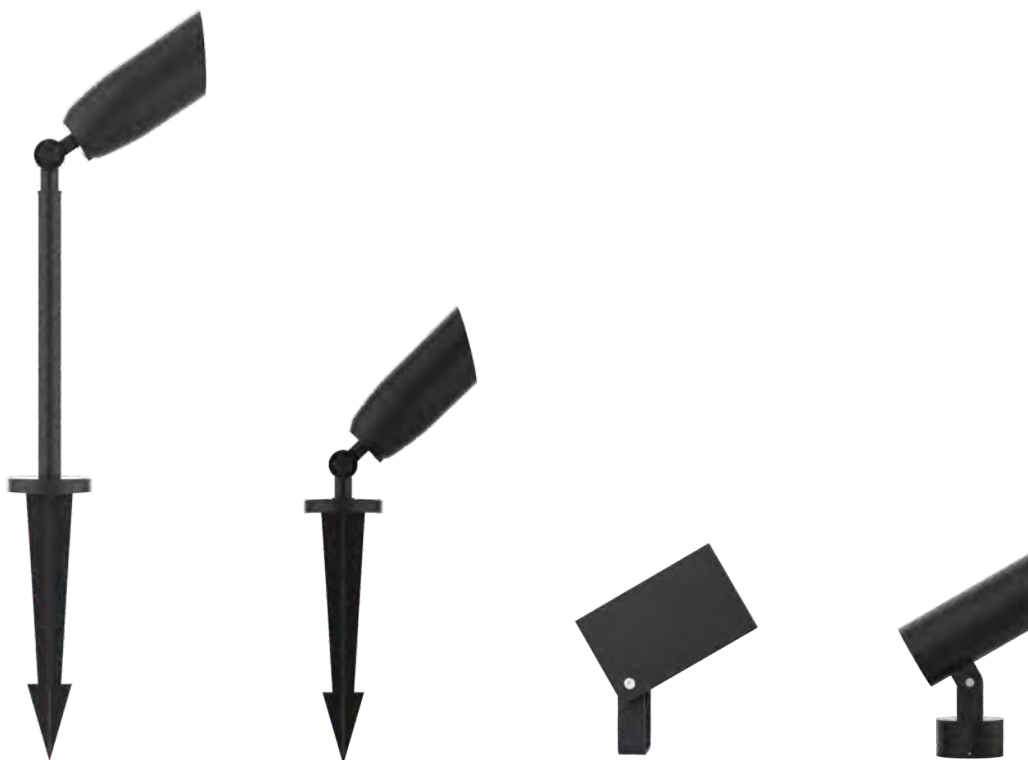

FLOOD FAMILY

Round : Ø62, Ø68, Ø78 & Ø150

Square: 150*150

different optional accessories:

flange, spike, tree strap, anti-glare hood, flat ring, honeycomb.

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.

Tempered glass diffuser.

Fire-resistant silicon gasket for good waterproof, IP65.

High purity aluminum heat conduction piece.

304/316 standard stainless steel fastness part.


DuPont professional outdoor powder coating finished normal thickness 100 micron.

500 hours salt spray test endurance rating.

All wiring, socket and connectors are heat resistant as per IEC.


Luminaires are certified by CE, RoHS.



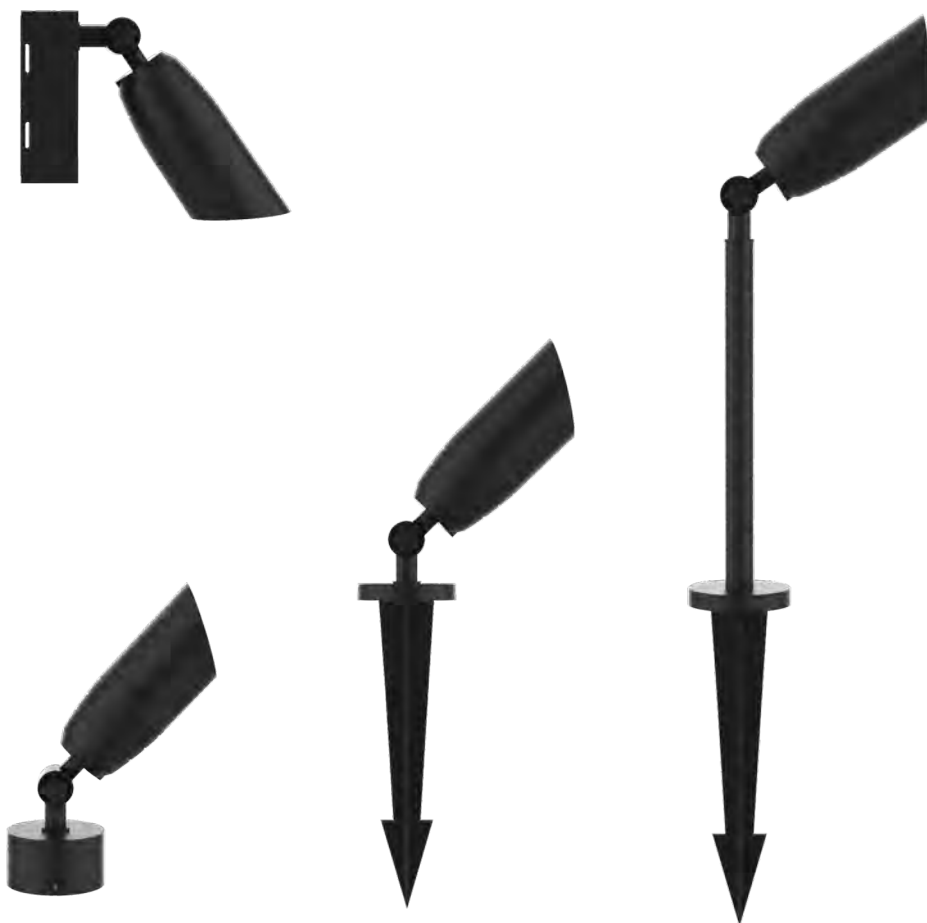

T9357/T9358

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304/316 standard stainless steel fastness part.
 3mm thickness tempered glass
 Silicon seal gasket
 High purity aluminum heat conduction piece.
 Optical level PMMA lens for T9357
 Anodized aluminium reflector for T9358

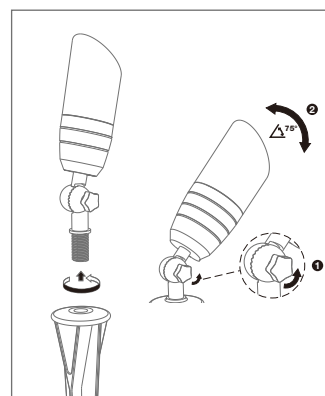









OPTIONAL ACCESSORY

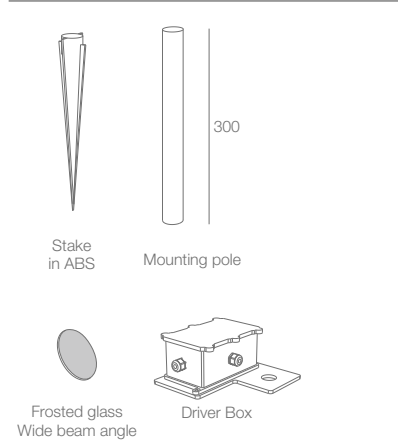


T9357

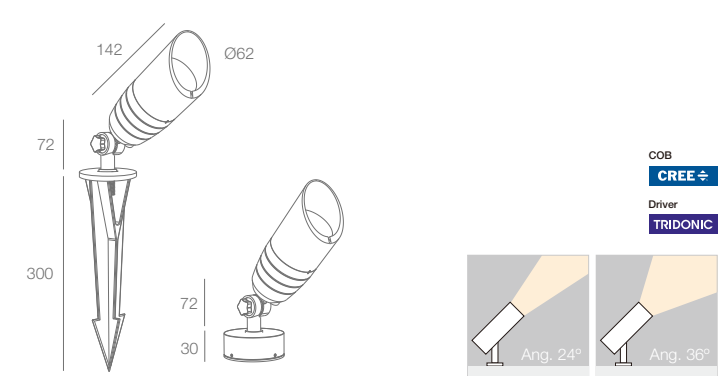

SOURCE	WATT	LUMEN	CCT	CRI	DRIVER
1x COB	7	/	3000K/4000K	≥80	150mA
1x COB	10	/	3000K/4000K	≥80	250mA
1x GU10	7(max)	/	/	/	/

OPTIONAL

FINISH BODY	COLOR TEMP	BEAM ANGLE
Standard ● BK	Standard 3000K 4000K	Standard Ang. 24°
Optional ● SL		Optional Ang. 36°









T9358

COB
CREE

Driver
TRIDONIC

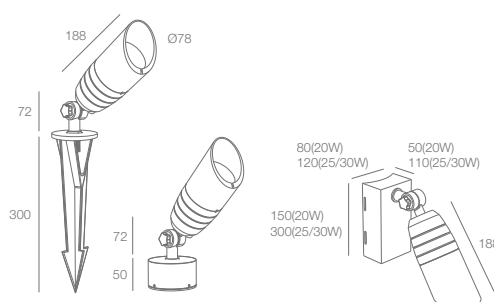

SOURCE	WATT	LUMEN	CCT	CRI	DRIVER
1x COB	15	726lm/776lm	3000K/4000K	≥80	350mA
1x COB	20	968lm/1035lm	3000K/4000K	≥80	500mA

T9358-FLANGE

T9358-STRAPS



OPTIONAL

FINISH BODY


Standard ● BK
Optional ● SL

COLOR TEMP

Standard 3000K 4000K

BEAM ANGLE

Standard Ang. 24°
Optional Ang. 36°



OPTIONAL ACCESSORY




Stake
in ABS



Mounting pole




Frosted glass
Wide beam angle




Driver Box




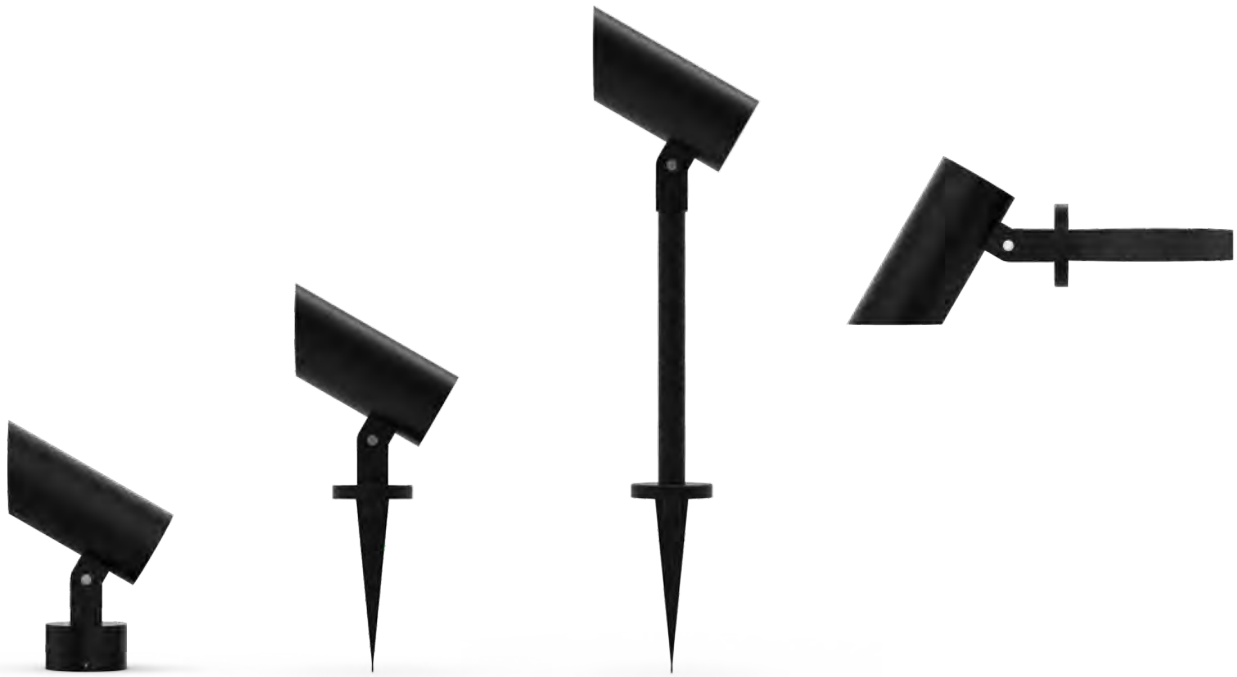


T9350/T9356

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304 standard stainless steel fastness part.
 3mm thickness tempered glass for T9350
 4mm thickness tempered glass for T9356
 Silicon seal gasket
 High purity aluminum heat conduction piece.
 Anodized aluminium reflector

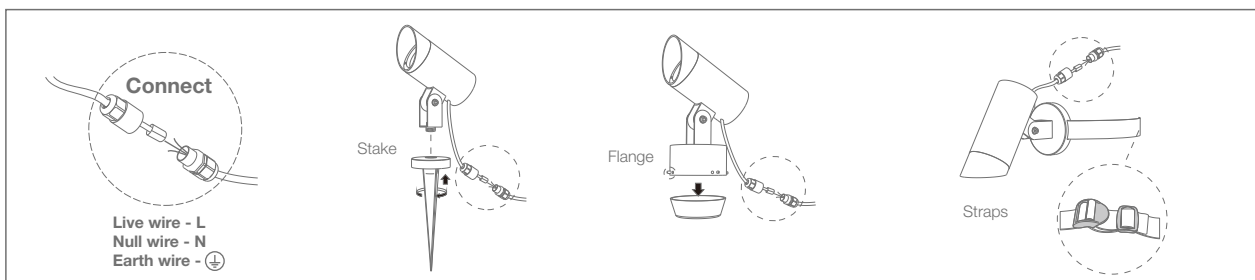


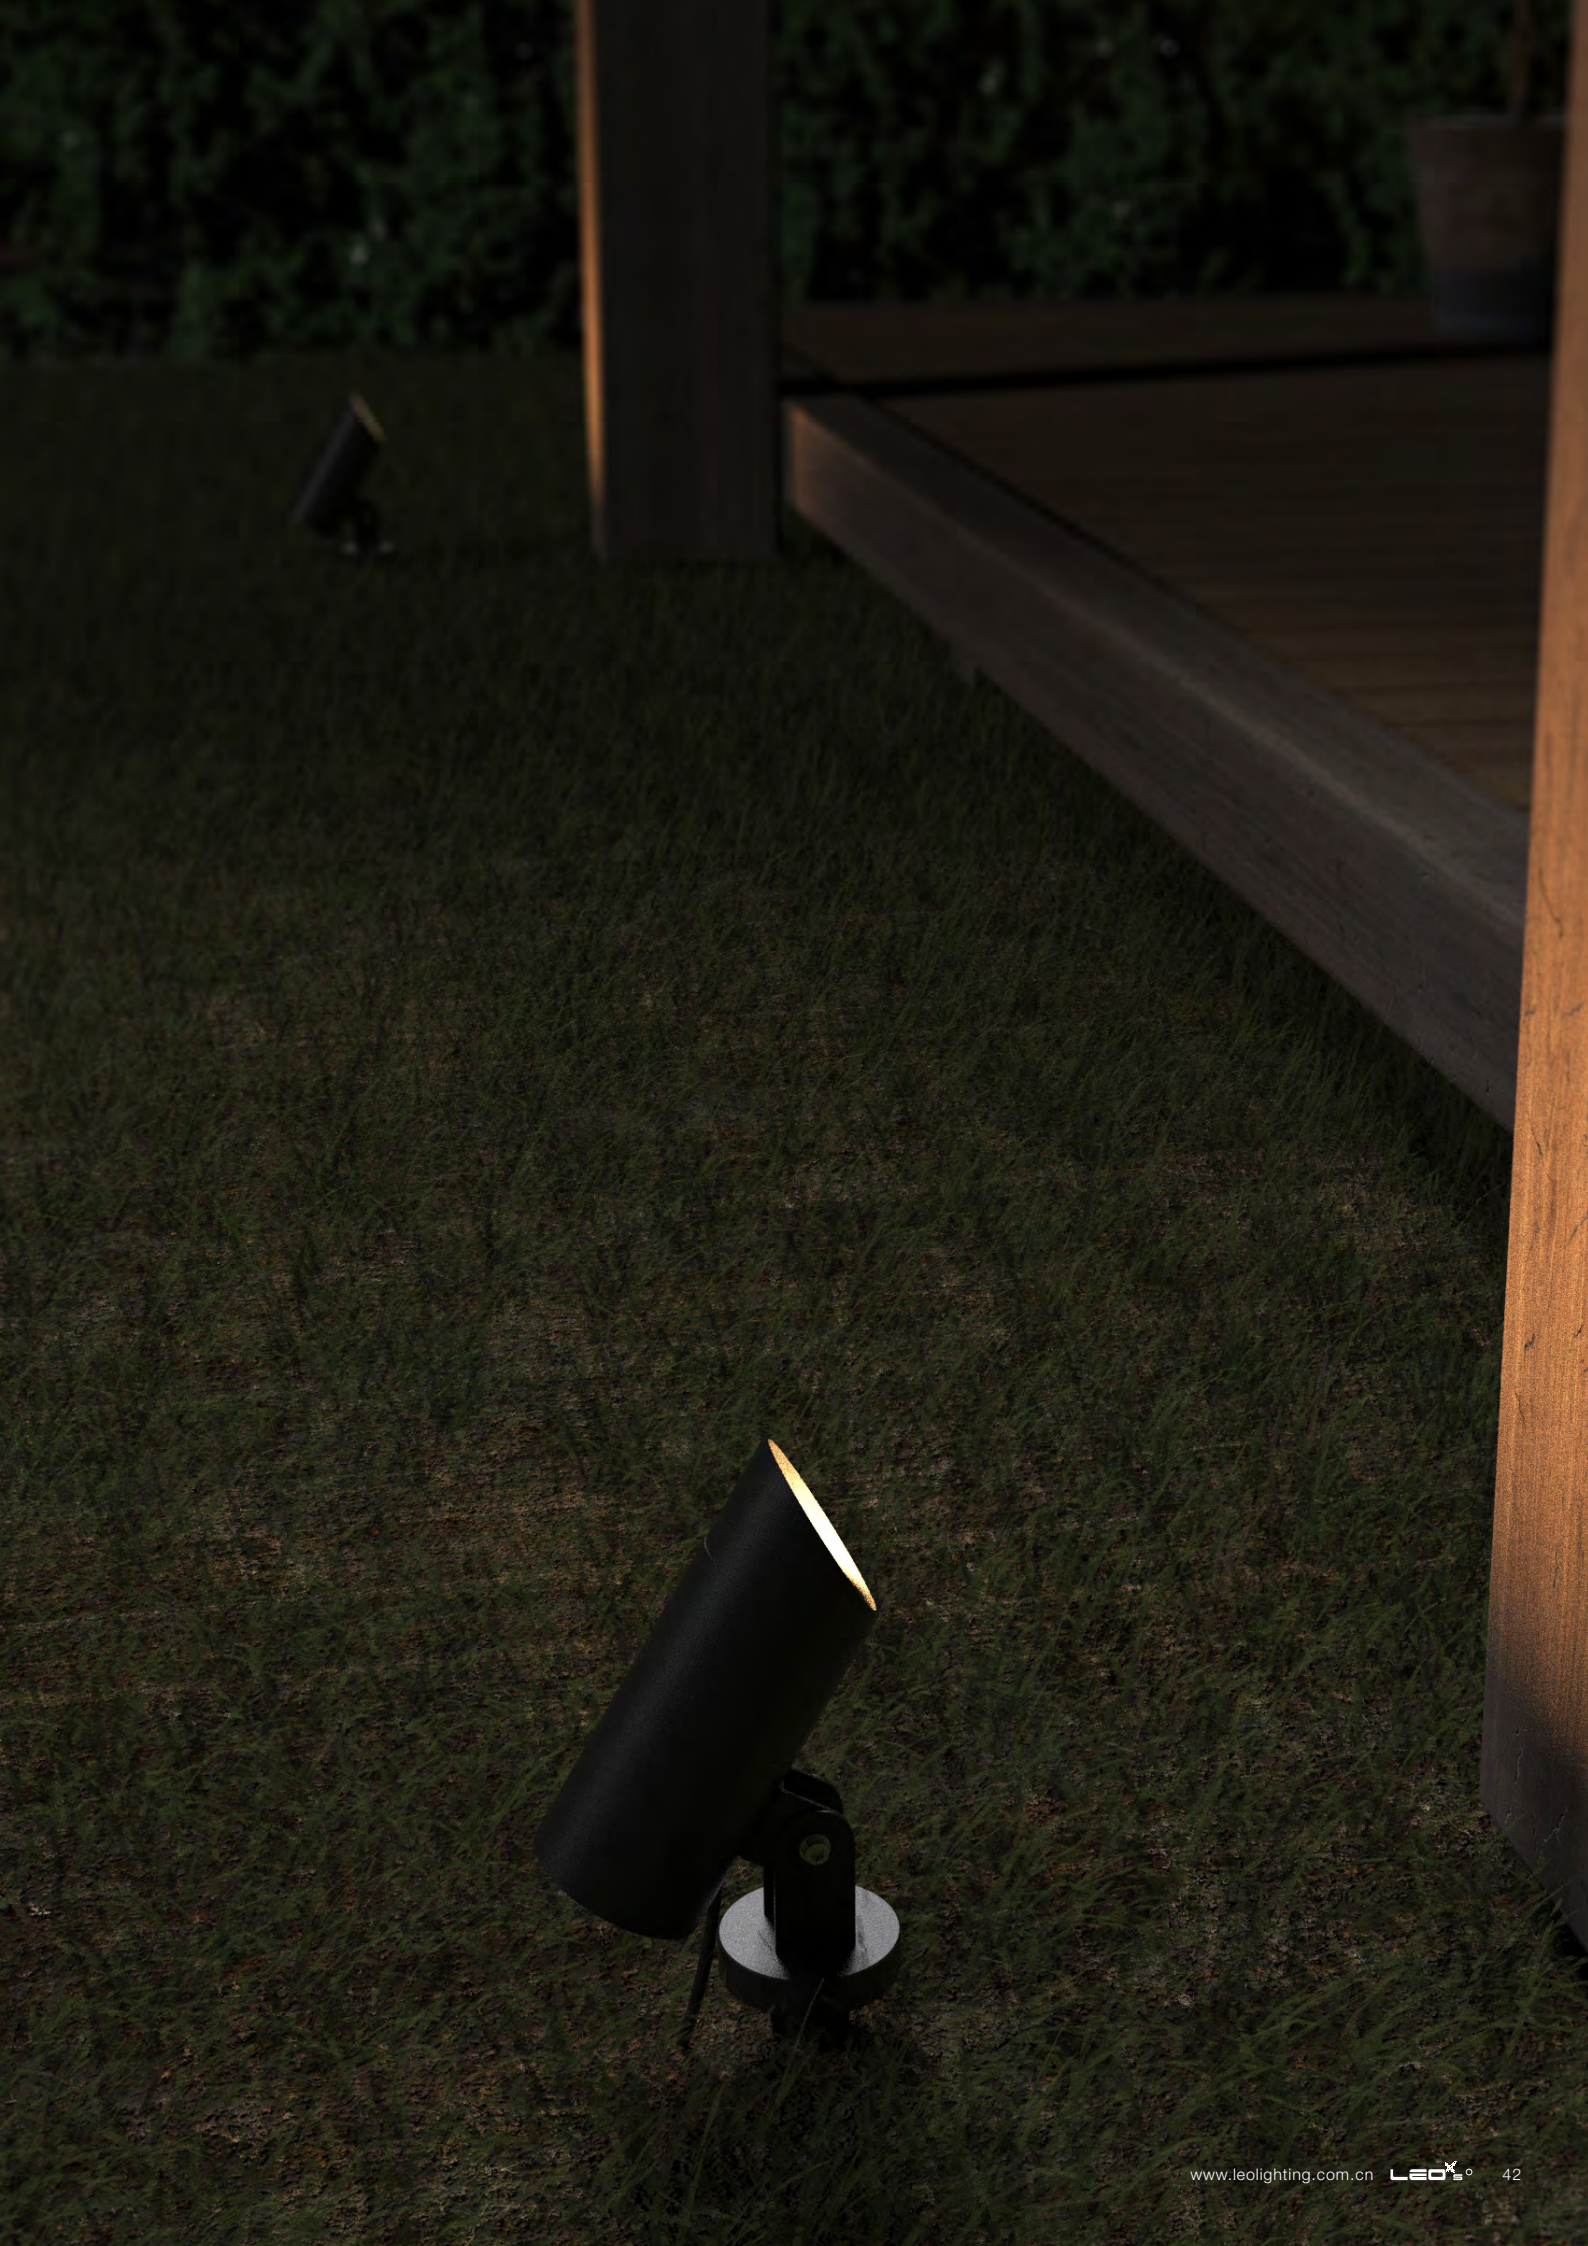

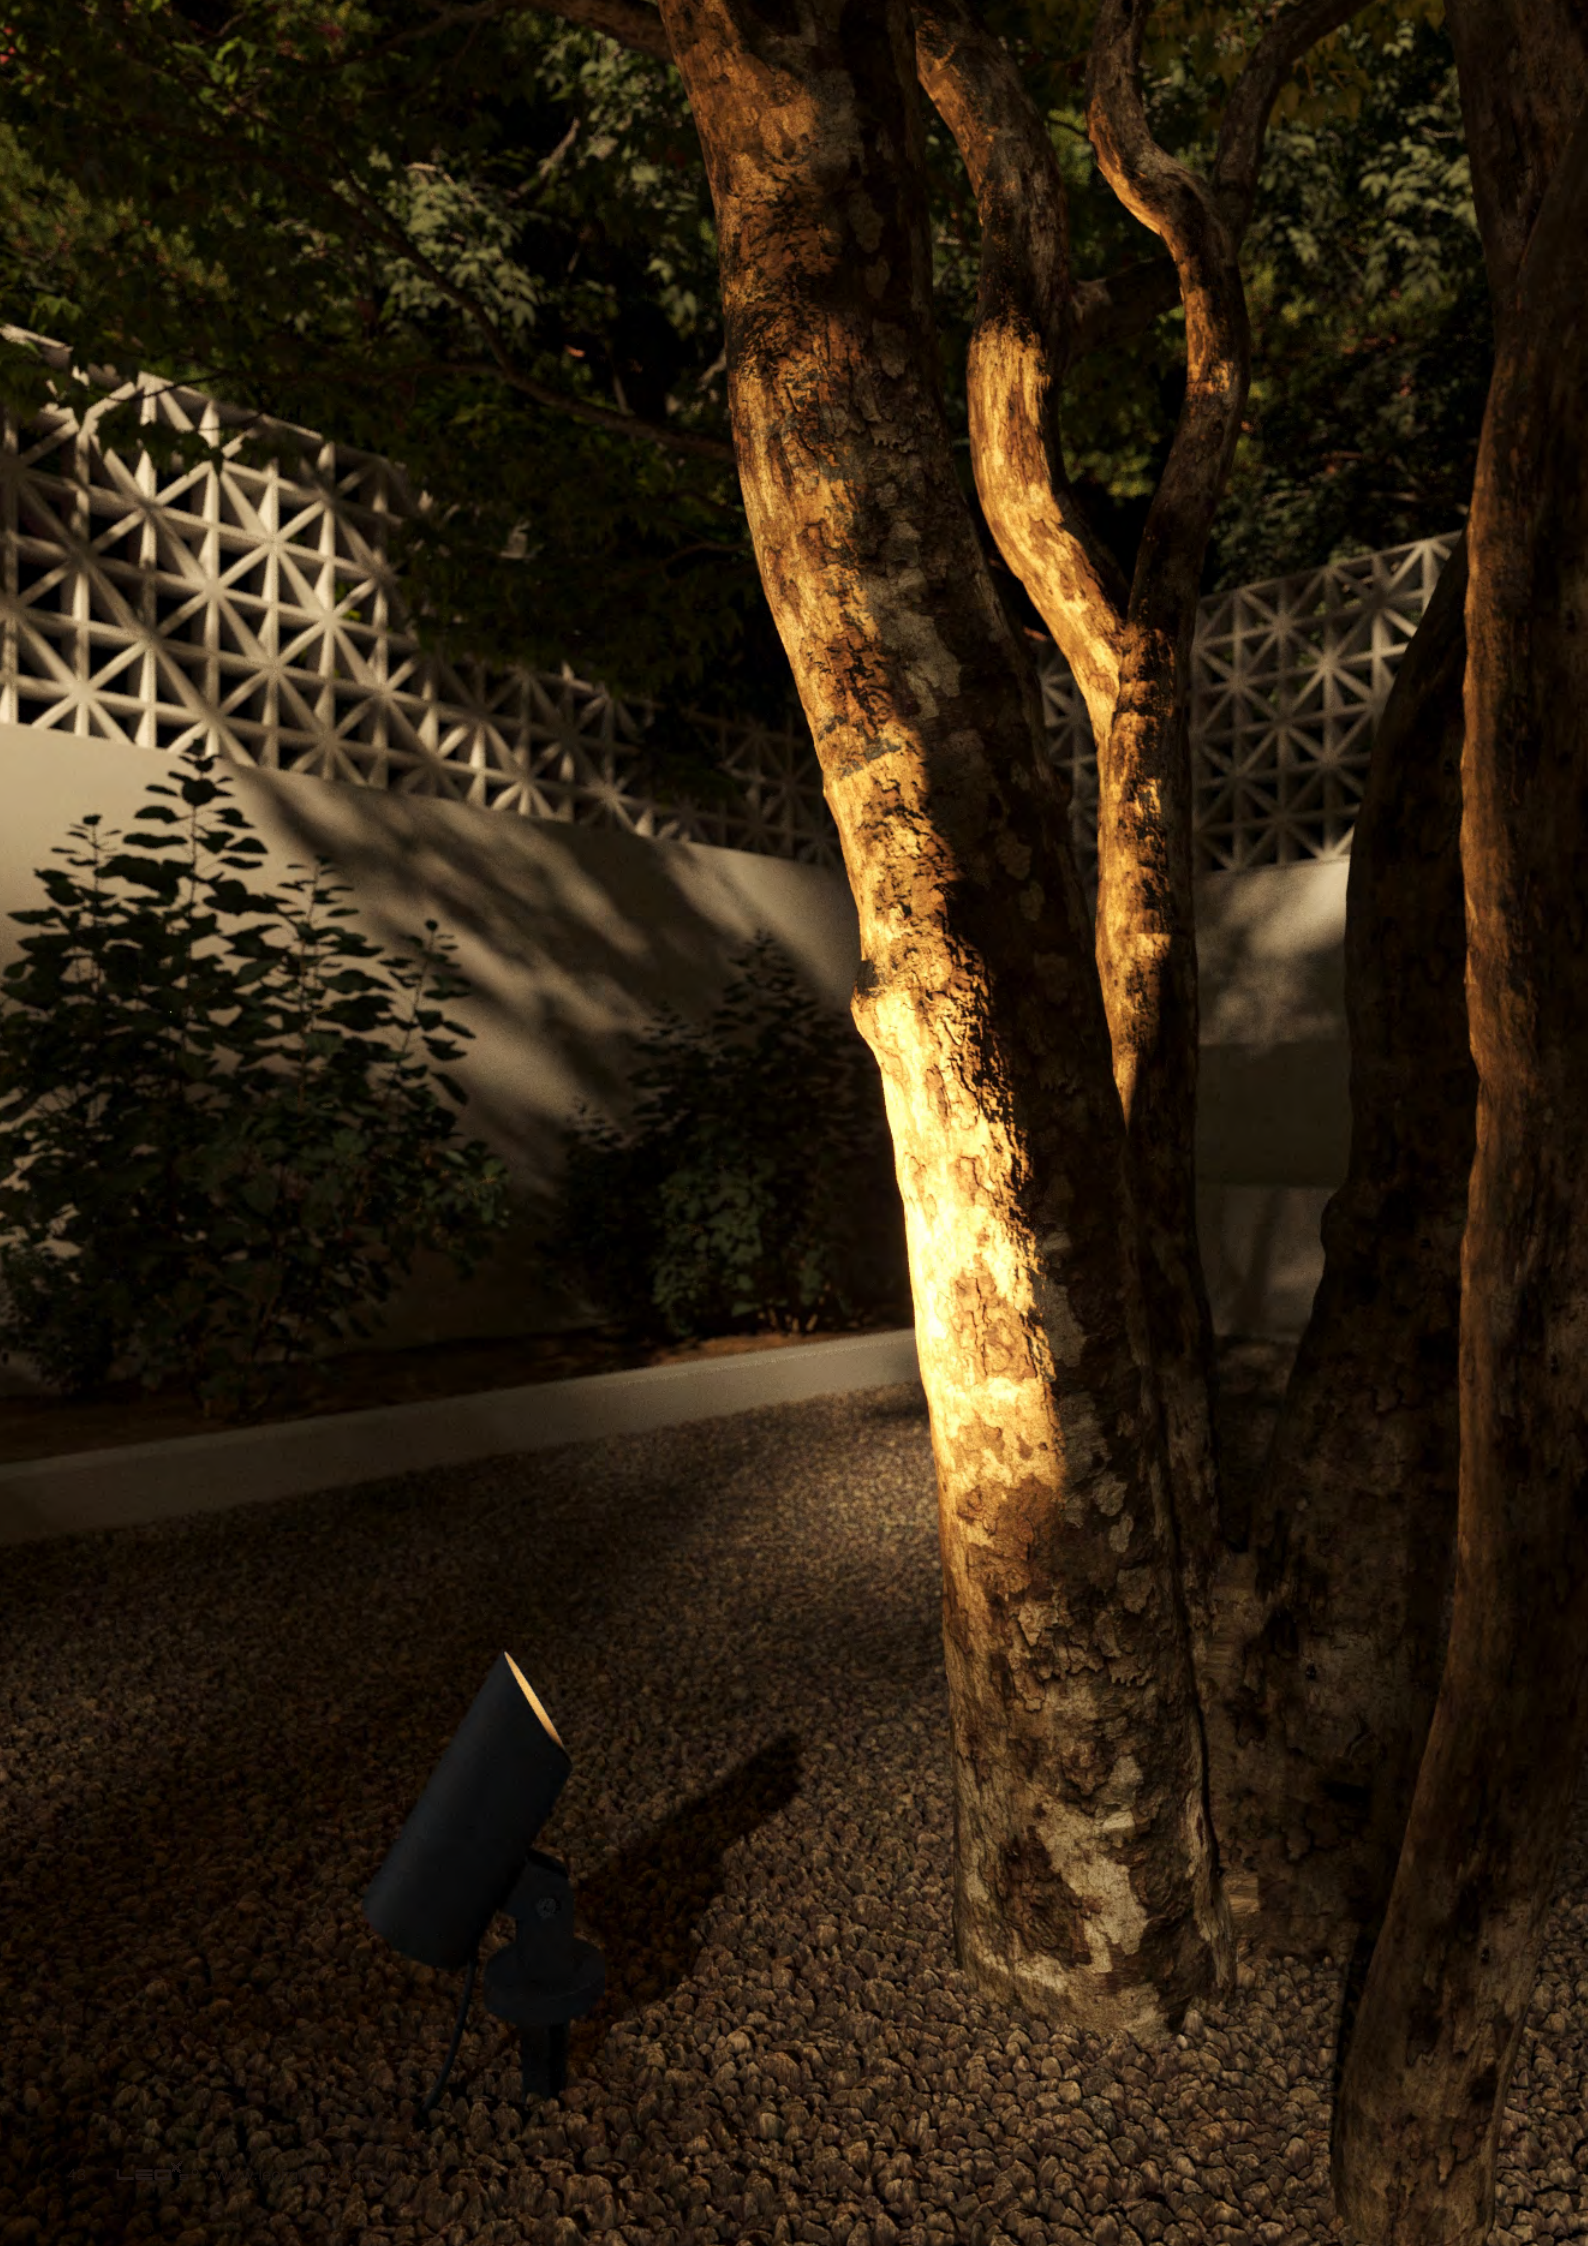



T9350



COB

CREE

Driver

TRIDONIC

Ang. 24°

Ang. 36°

Ang. 15°

SOURCE	WATT	LUMEN	CCT	CRI	DRIVER
1x COB	10	642lm/689lm	3000K/4000K	≥80	250mA
1x COB	15	1052lm/1125lm	3000K/4000K	≥80	350mA
1x GU10	7(max)	/	/	/	/

FINISH BODY

Standard

BK

Optional

SL

COLOR TEMP

Standard

3000K

4000K

BEAM ANGLE



Standard

Ang. 24°



Optional

Ang. 36°

Ang. 15°

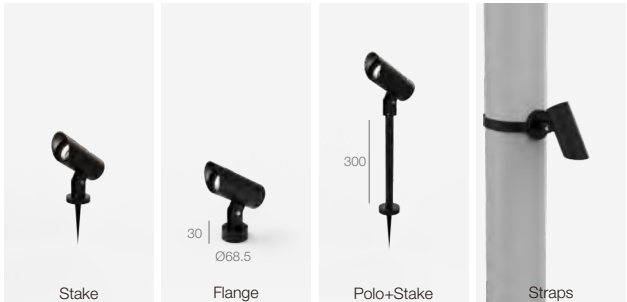

OPTIONAL ACCESSORY

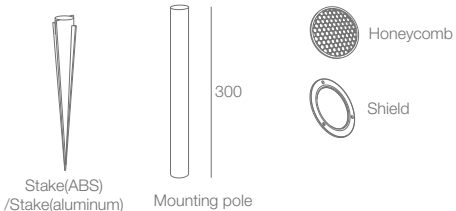


ACCESSORY







T9356



COB

CREE

Driver

OSRAM

Ang. 24°

Ang. 36°

SOURCE	WATT	LUMEN	CCT	CRI	DRIVER
1x COB	42	2879lm/3080m	3000K/4000K	≥80	1050mA

OPTIONAL

FINISH BODY

Standard

BK

Optional

SL

COLOR TEMP

Standard

3000K

4000K


BEAM ANGLE

Standard


Ang. 24°

Optional

Ang. 36°



OPTIONAL ACCESSORY



ACCESSORY

IP68
connector
(standard for COB)
(optional for GU10)


Stake(aluminum)






T9359

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304 standard stainless steel fastness part.
 3mm thickness tempered glass
 Silicon seal gasket
 High purity aluminum heat conduction piece.
 Anodized aluminium reflector

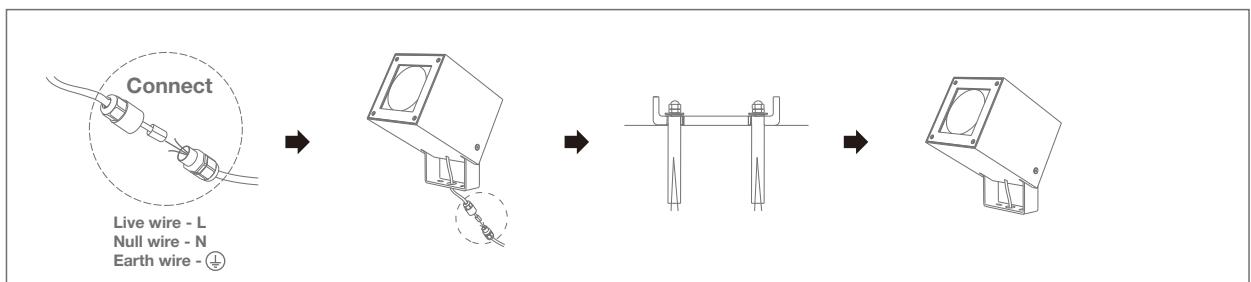


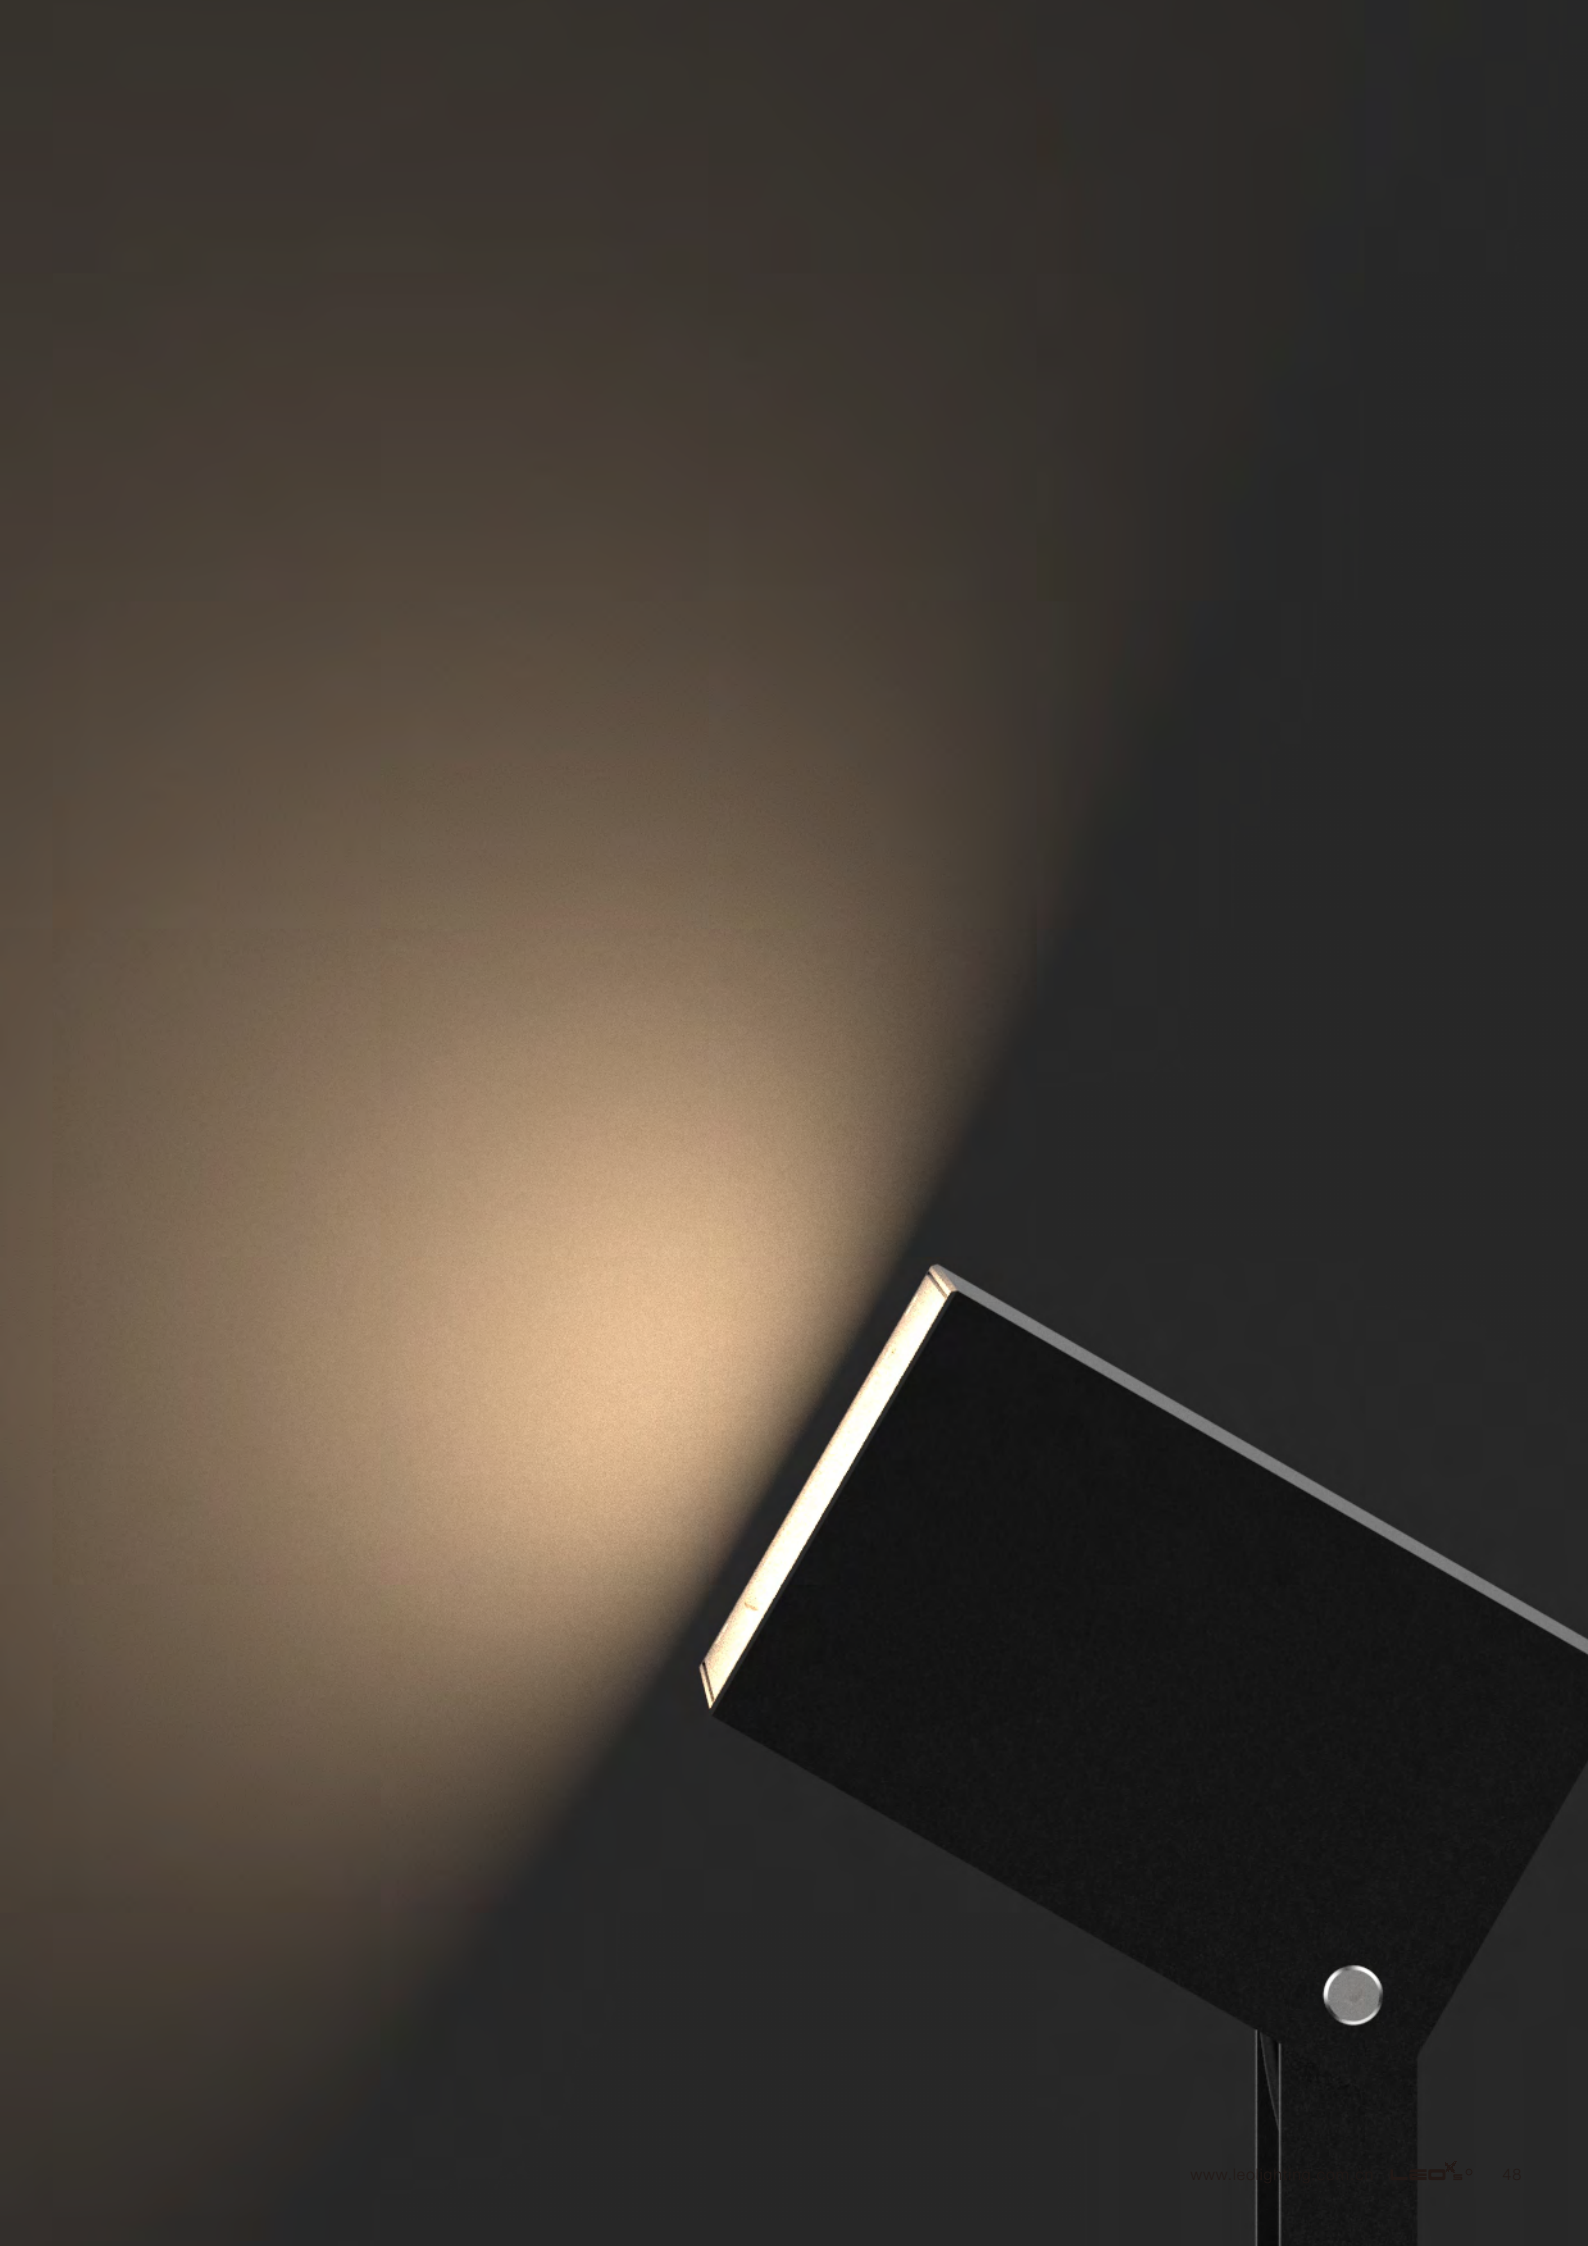





T9359

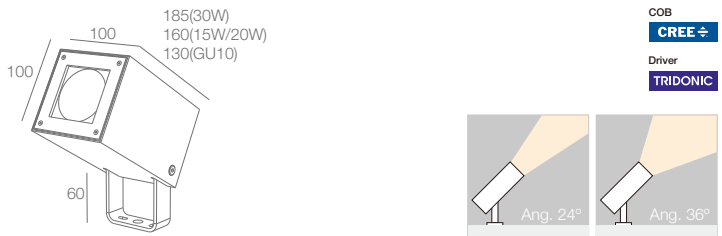


SOURCE	WATT	LUMEN	CCT	CRI	DRIVER
1x COB	15	1052lm/1125lm	3000K/4000K	≥80	350mA
1x COB	20	1549m/1657m	3000K/4000K	≥80	500mA
1x COB	30	2055m/2198m	3000K/4000K	≥80	700mA
1x GU10	7(max)	/	/	/	/

OPTIONAL

FINISH BODY	COLOR TEMP	BEAM ANGLE
Standard ● BK	Standard 3000K 4000K	Standard Ang. 24°
Optional ● SL		Optional Ang. 36°

OPTIONAL ACCESSORY



ACCESSORY







WALL LIGHTS
IP65



Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
Tempered glass diffuser, thickness 4mm.
Fire-resistant silicon gasket for good waterproof, IP65.
High purity aluminum heat conduction piece.
304 standard stainless steel fastness part.
DuPont professional outdoor powder coating finished normal thickness 100 micron.
500 hours salt spray test endurance rating.
All wiring, socket and connectors are heat resistant as per IEC.
Luminaires are certified by CE, RoHS.

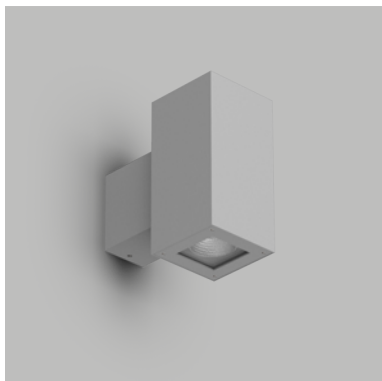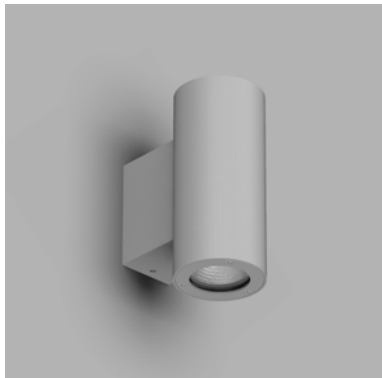


IP65

WALL


LIGHT

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
Tempered glass diffuser, thickness 4mm.
Fire-resistant silicon gasket for good waterproof, IP65.
High purity aluminum heat conduction piece.
304 standard stainless steel fastness part.
DuPont professional outdoor powder coating finished normal thickness 100 micron.
500 hours salt spray test endurance rating.
All wiring, socket and connectors are heat resistant as per IEC.
Luminaires are certified by CE, RoHS.




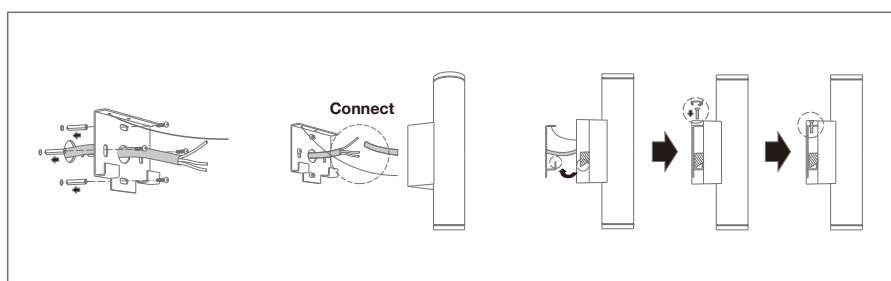


Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# stainless steel fastness parts.
 4mm thickness tempered glass.
 Fire-resistant silicon seal gasket.

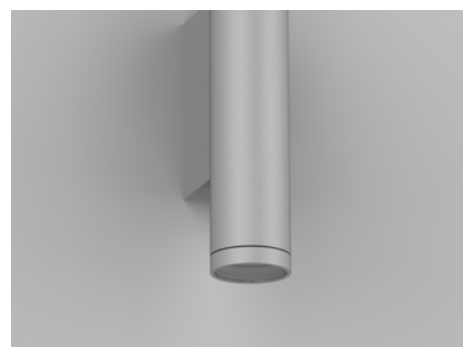




B9604




SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x G9	LED-QT14	3.8(max)	/	/	/	/	/

OPTIONAL

- FINISH BODY
- Standard ☒ SL
- Optional ☒ BK ☐ WH


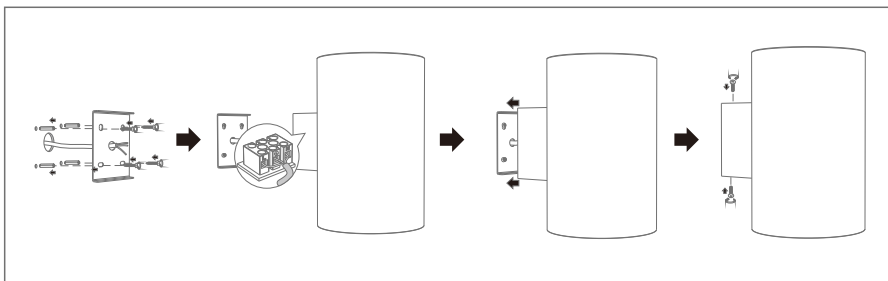


Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# stainless steel fastness parts.
 4mm thickness tempered glass.
 Fire-resistant silicon seal gasket.

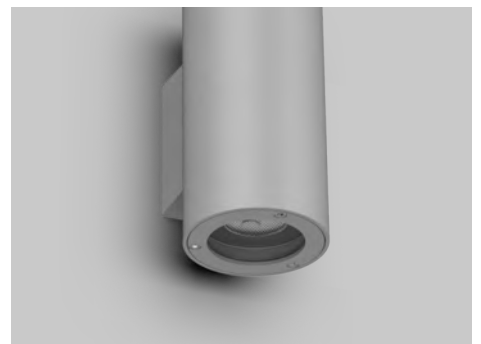



B9597





SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x GU10	LED-PAR16	7(max)	/	/	/	/	/

OPTIONAL

- FINISH BODY
- Standard ☐ SL
- Optional ☒ BK ☐ WH




B9596



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x GU10	LED-PAR16	7(max)	/	/	/	/	/

OPTIONAL

- FINISH BODY
- Standard ☐ SL
- Optional ☒ BK ☐ WH

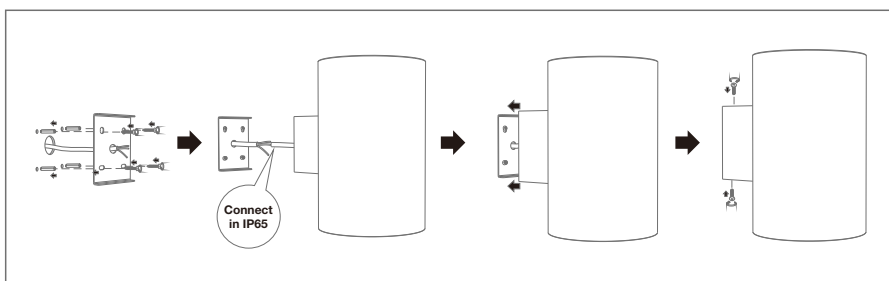


Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# stainless steel fastness parts.
 4mm thickness tempered glass.
 Fire-resistant silicon seal gasket.






B9558



COB: CREE
Driver: TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x COB	CXA1512	2x 15	2x 1052lm	3000K	≥80	700mA	24°
2x COB	CXA1512	2x 15	2x 1125lm	4000K	≥80	700mA	24°
2x GU10	LED-PAR16	7(max)	/	/	/	/	/

OPTIONAL


FINISH BODY
Standard: SL
Optional: WH, BK

COLOR TEMP
Standard: 3000K, 4000K


BEAM ANGLE
Standard: Ang. 24°
Optional: Ang. 36°



B9559



COB: CREE
Driver: TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA1512	15	1052lm	3000K	≥80	350mA	24°
1x COB	CXA1512	15	1125lm	4000K	≥80	350mA	24°
1x GU10	LED-PAR16	7(max)	/	/	/	/	/

OPTIONAL


FINISH BODY
Standard: SL
Optional: WH, BK

COLOR TEMP
Standard: 3000K, 4000K

BEAM ANGLE
Standard: Ang. 24°
Optional: Ang. 36°



B9560



COB
CREE

Driver
OSRAM
TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x COB	CXA2520	2x 20	2x 1537lm	3000K	≥80	500mA	24°
2x COB	CXA2520	2x 20	2x 1644m	4000K	≥80	500mA	24°
2x COB	CXA2520	2x 30	2x 2055m	3000K	≥80	700mA	24°
2x COB	CXA2520	2x 30	2x 2198m	4000K	≥80	700mA	24°

OPTIONAL

FINISH BODY

Standard ● SL
Optional ○ WH ● BK

COLOR TEMP


Standard 3000K 4000K

BEAM ANGLE

Standard Ang. 24°
Optional Ang. 36°




B9561



COB
CREE

Driver
OSRAM



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2520	20	1537lm	3000K	≥80	500mA	24°
1x COB	CXA2520	20	1644m	4000K	≥80	500mA	24°
1x COB	CXA2520	30	2055m	3000K	≥80	700mA	24°
1x COB	CXA2520	30	2198m	4000K	≥80	700mA	24°

OPTIONAL

FINISH BODY

Standard ● SL
Optional ○ WH ● BK

COLOR TEMP


Standard 3000K 4000K

BEAM ANGLE


Standard Ang. 24°
Optional Ang. 36°



B9556



COB Driver
CREE OSRAM
MEAN WELL
TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x COB	CXA2520	2x 30	2x 2055lm	3000K	≥80	700mA	24°
2x COB	CXA2520	2x 30	2x 2198m	4000K	≥80	700mA	24°
2x COB	CXA2540	2x 42	2x 2879m	3000K	≥80	1050mA	24°
2x COB	CXA2540	2x 42	2x 3080m	4000K	≥80	1050mA	24°

OPTIONAL


FINISH BODY
Standard ● SL
Optional ○ WH ● BK

COLOR TEMP
Standard 3000K 4000K


BEAM ANGLE
Standard Ang. 24°
Optional Ang. 36°



B9557



COB Driver
CREE OSRAM





SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2520	30	2055lm	3000K	≥80	700mA	24°
1x COB	CXA2520	30	2198m	4000K	≥80	700mA	24°
1x COB	CXA2530	42	2879m	3000K	≥80	1050mA	24°
1x COB	CXA2530	42	3080m	4000K	≥80	1050mA	24°

OPTIONAL


FINISH BODY
Standard ● SL
Optional ○ WH ● BK

COLOR TEMP
Standard 3000K 4000K

BEAM ANGLE
Standard Ang. 24°
Optional Ang. 36°

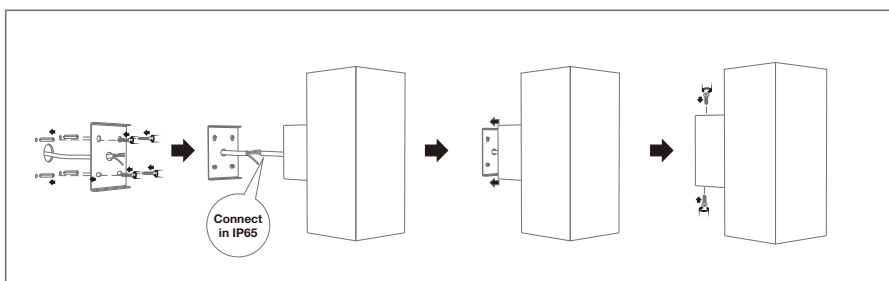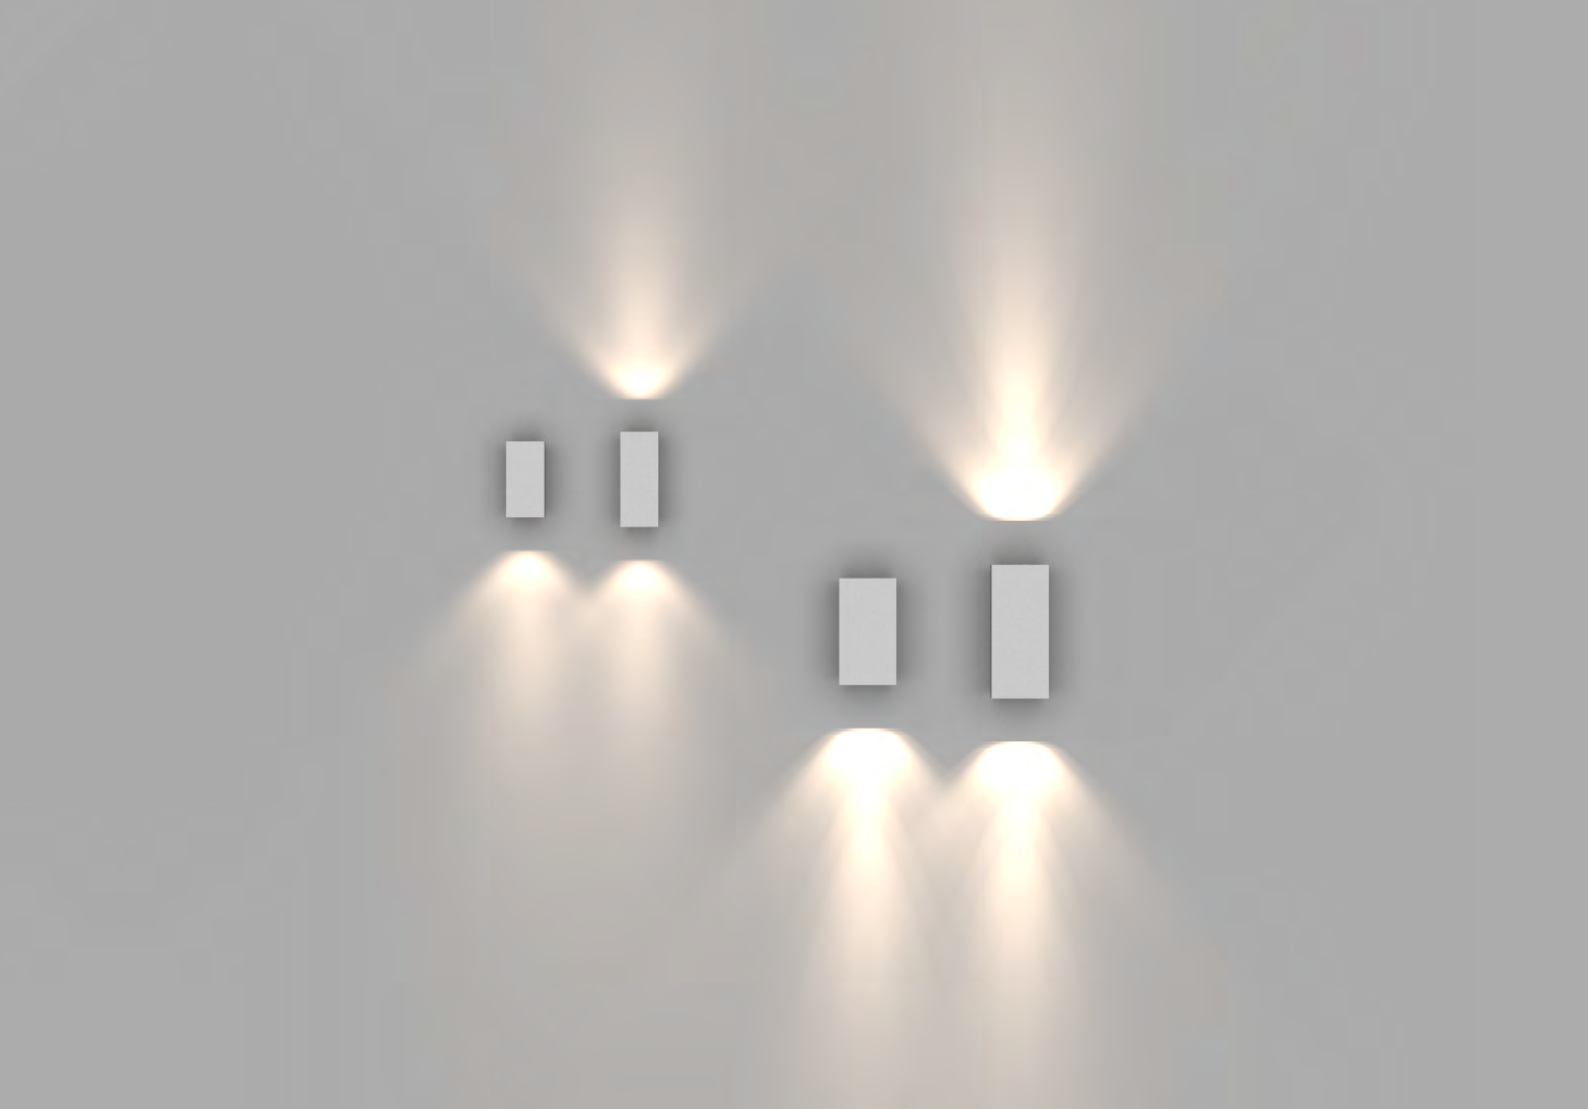


Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# stainless steel fastness parts.
 4mm thickness tempered glass.
 Fire-resistant silicon seal gasket.

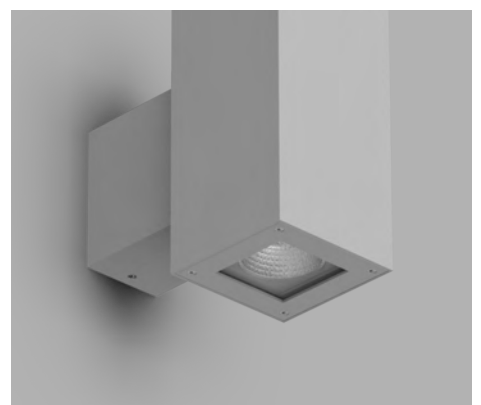




B9562



COB CREE Driver TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x COB	CXA1512	2x 15	2x 1052lm	3000K	≥80	700mA	24°
2x COB	CXA1512	2x 15	2x 1125lm	4000K	≥80	700mA	24°
2x GU10	LED-PAR16	7(max)	/	/	/	/	/

OPTIONAL


FINISH BODY
 Standard ● SL
 Optional ○ WH ● BK

COLOR TEMP
 Standard 3000K 4000K


BEAM ANGLE
 Standard Ang. 24°
 Optional Ang. 36°



B9563



COB CREE Driver TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA1512	15	1052lm	3000K	≥80	350mA	24°
1x COB	CXA1512	15	1125lm	4000K	≥80	350mA	24°
1x GU10	LED-PAR16	7(max)	/	/	/	/	/


OPTIONAL

FINISH BODY
 Standard ● SL
 Optional ○ WH ● BK

COLOR TEMP
 Standard 3000K 4000K

BEAM ANGLE
 Standard Ang. 24°
 Optional Ang. 36°

B9564



COB


CREE

OSRAM

MEAN WELL

TRIDONIC

Driver



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x COB	CXA2520	2x 30	2x 2055lm	3000K	≥80	700mA	24°
2x COB	CXA2520	2x 30	2x 2198m	4000K	≥80	700mA	24°
2x COB	CXA2540	2x 42	2x 2879m	3000K	≥80	1050mA	24°
2x COB	CXA2540	2x 42	2x 3080m	4000K	≥80	1050mA	24°

OPTIONAL

FINISH BODY

Standard

SL

WH

BK

Optional

COLOR TEMP

Standard

3000K

4000K

BEAM ANGLE


Standard

Ang. 24°

Ang. 36°

Optional

B9565




COB

CREE

OSRAM

Driver



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA2520	30	2055lm	3000K	≥80	700mA	24°
1x COB	CXA2520	30	2198m	4000K	≥80	700mA	24°
1x COB	CXA2530	42	2879m	3000K	≥80	1050mA	24°
1x COB	CXA2530	42	3080m	4000K	≥80	1050mA	24°

OPTIONAL

FINISH BODY

Standard

SL

WH

BK

Optional

COLOR TEMP

Standard

3000K

4000K

BEAM ANGLE


Standard

Ang. 24°

Ang. 36°

Optional




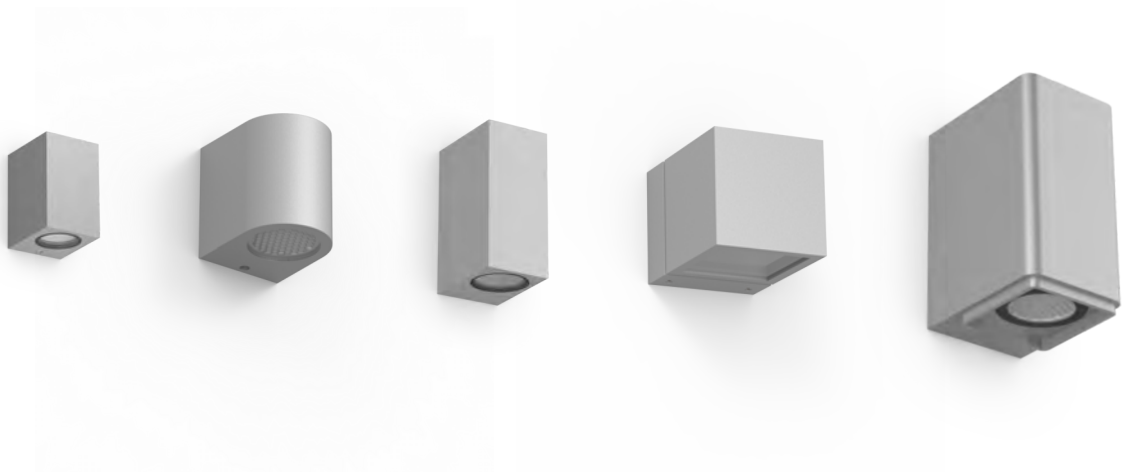


IP65 WALL LIGHT

Die-cast aluminum housing with high corrosion resistance.
DuPont outdoor electrostatic powder coating.
304# stainless steel fastness parts.
3mm thickness tempered glass.
Fire-resistant Silicon seal gasket.



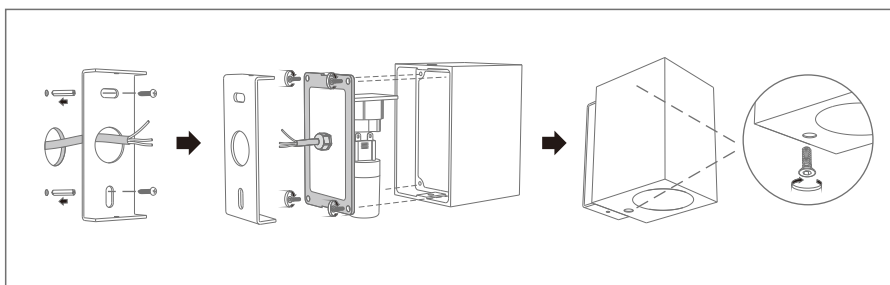


Die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# stainless steel fastness parts.
 3mm thickness tempered glass.
 Fire-resistant Silicon seal gasket.

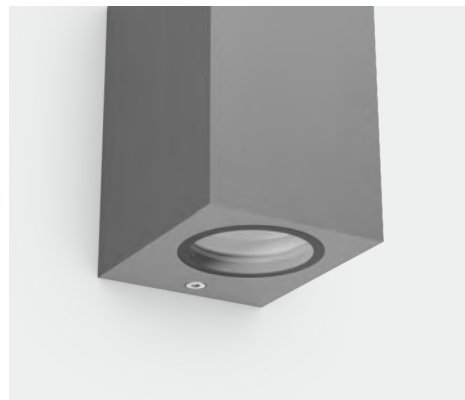



B9601



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x G9	LED-QT14	4.8(max)	/	/	/	/	/

OPTIONAL


FINISH BODY

Standard ☒ SL

Optional ☒ BK ☐ WH



B9608



COB **CREE** Driver **TRIDONIC**

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x GU10	LED-PAR16	7(max)	/	/	/	/	/
☒ 1x COB	CXA1507	10	642lm	3000K	≥80	250mA	☒ 24°
☒ 1x COB	CXA1507	10	689lm	4000K	≥80	250mA	☒ 24°

OPTIONAL

FINISH BODY

Standard ☒ SAM

Optional ☒ BK ☐ WH

COLOR TEMP

Standard ☒ 3000K ☐ 4000K



BEAM ANGLE

Standard ☒ Ang. 24°

Optional ☐ Ang. 36° ☐ Ang. 15°

ACCESSORY

☒ Honeycomb

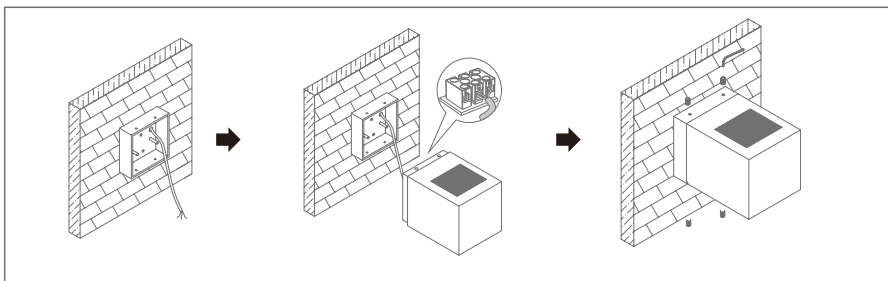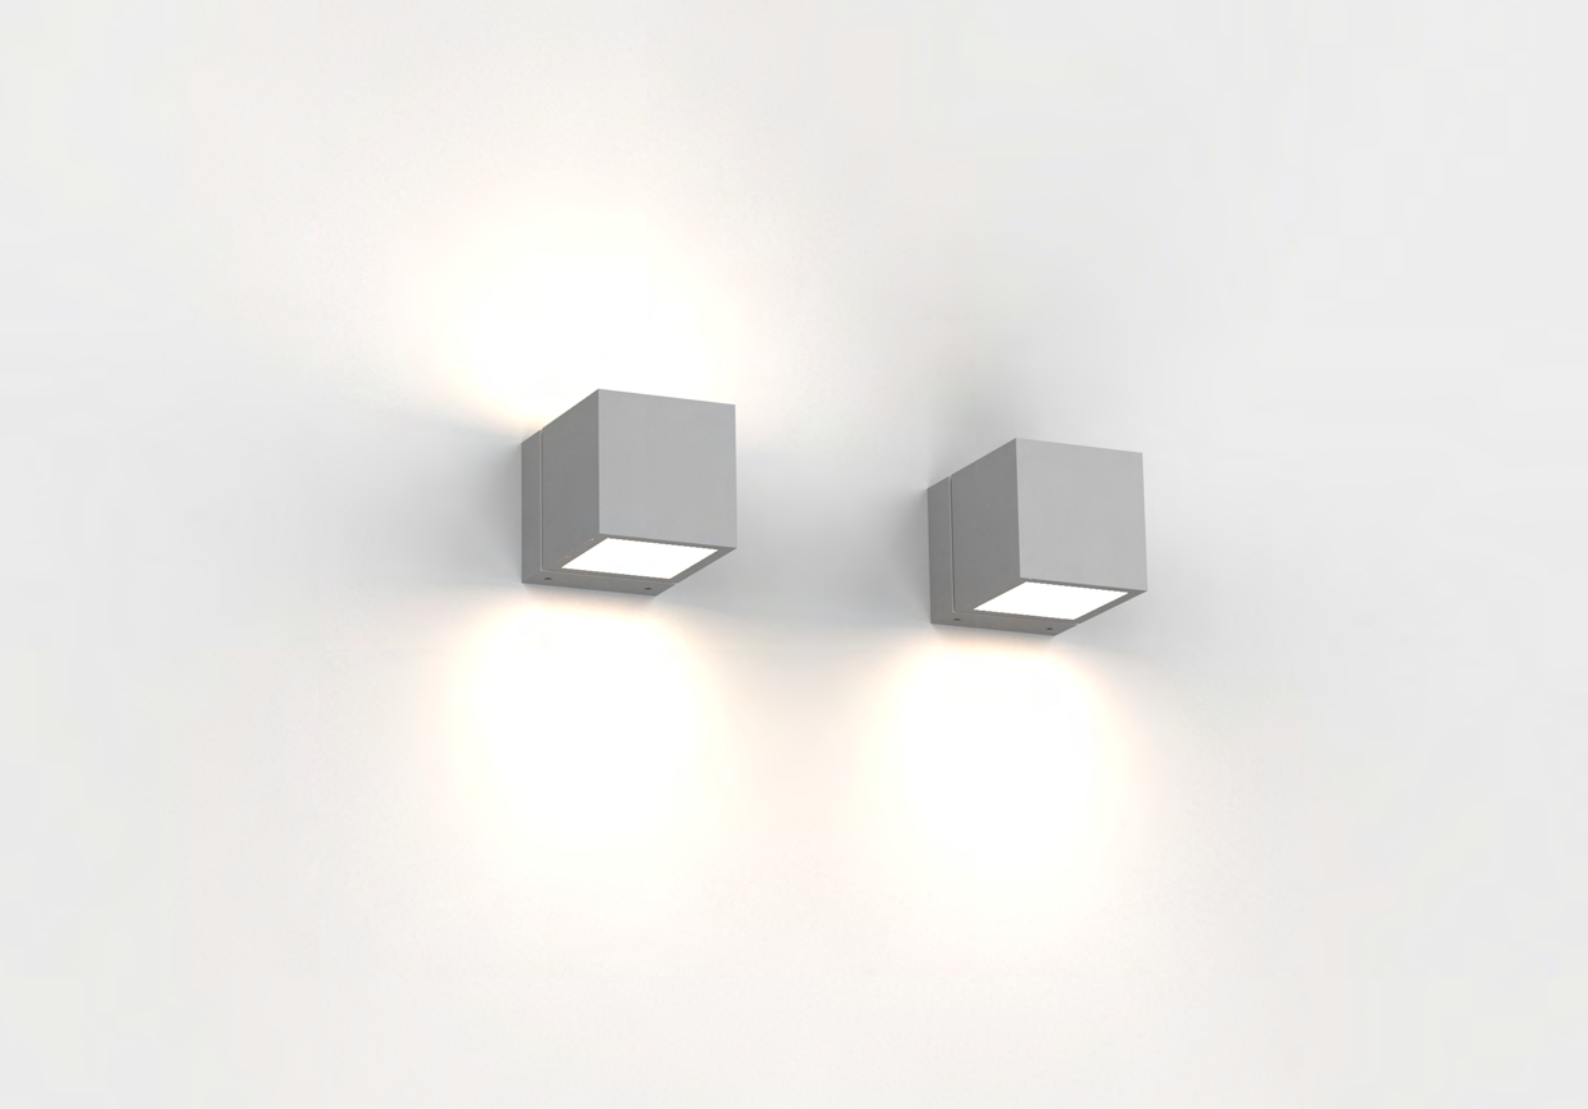


Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# standard stainless steel fastness part.
 3mm thickness tempered glass.
 High purity aluminum heat conduction piece.
 Fire-resistant silicon seal gasket.
 2.0W/(m·k)MCPCB.




ACCESSORY

B9401



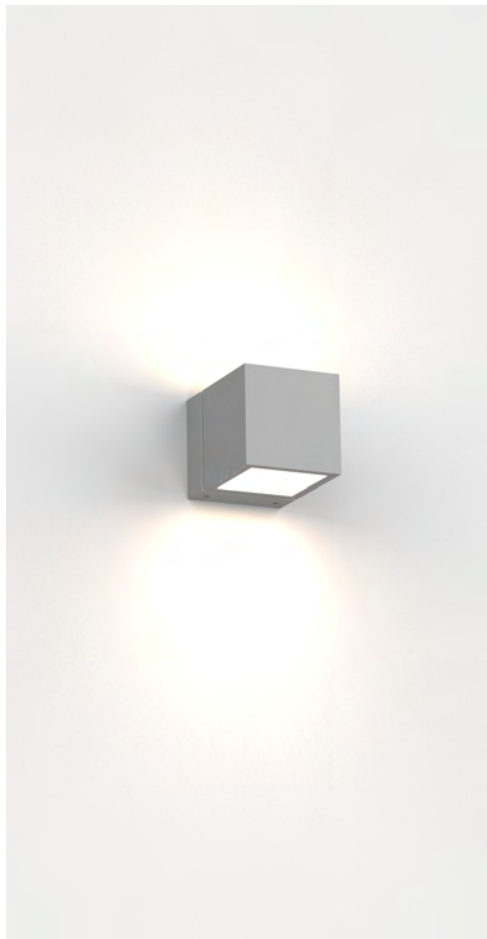

B9401




LED

CREE

Driver

MEAN WELL




SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x LED	XT-E	3x 2.5	485lm	3000K	≥80	700mA	120°
1x LED	XT-E	3x 2.5	519lm	4000K	≥70	700mA	120°
1x G9	QT14	40(max)	/	/	/	/	/

LED

CREE

Driver

MEAN WELL



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x LED	XT-E	6x 2.5	2x 485lm	3000K	≥80	700mA	120°
2x LED	XT-E	6x 2.5	2x 519lm	4000K	≥70	700mA	120°
1x G9	QT14	40(max)	/	/	/	/	/

OPTIONAL

FINISH BODY

Standard

SL

Optional

BK



WH

COLOR TEMP


Standard

3000K

4000K

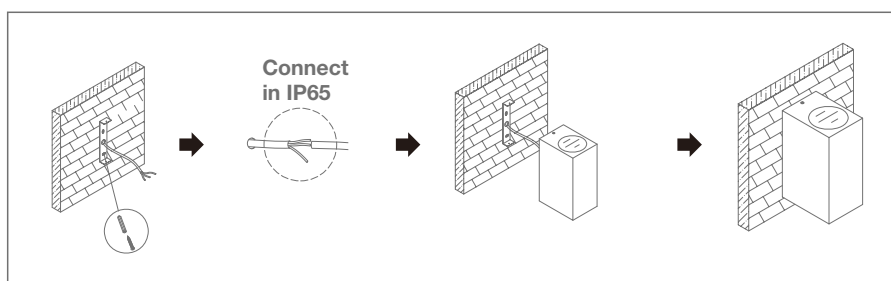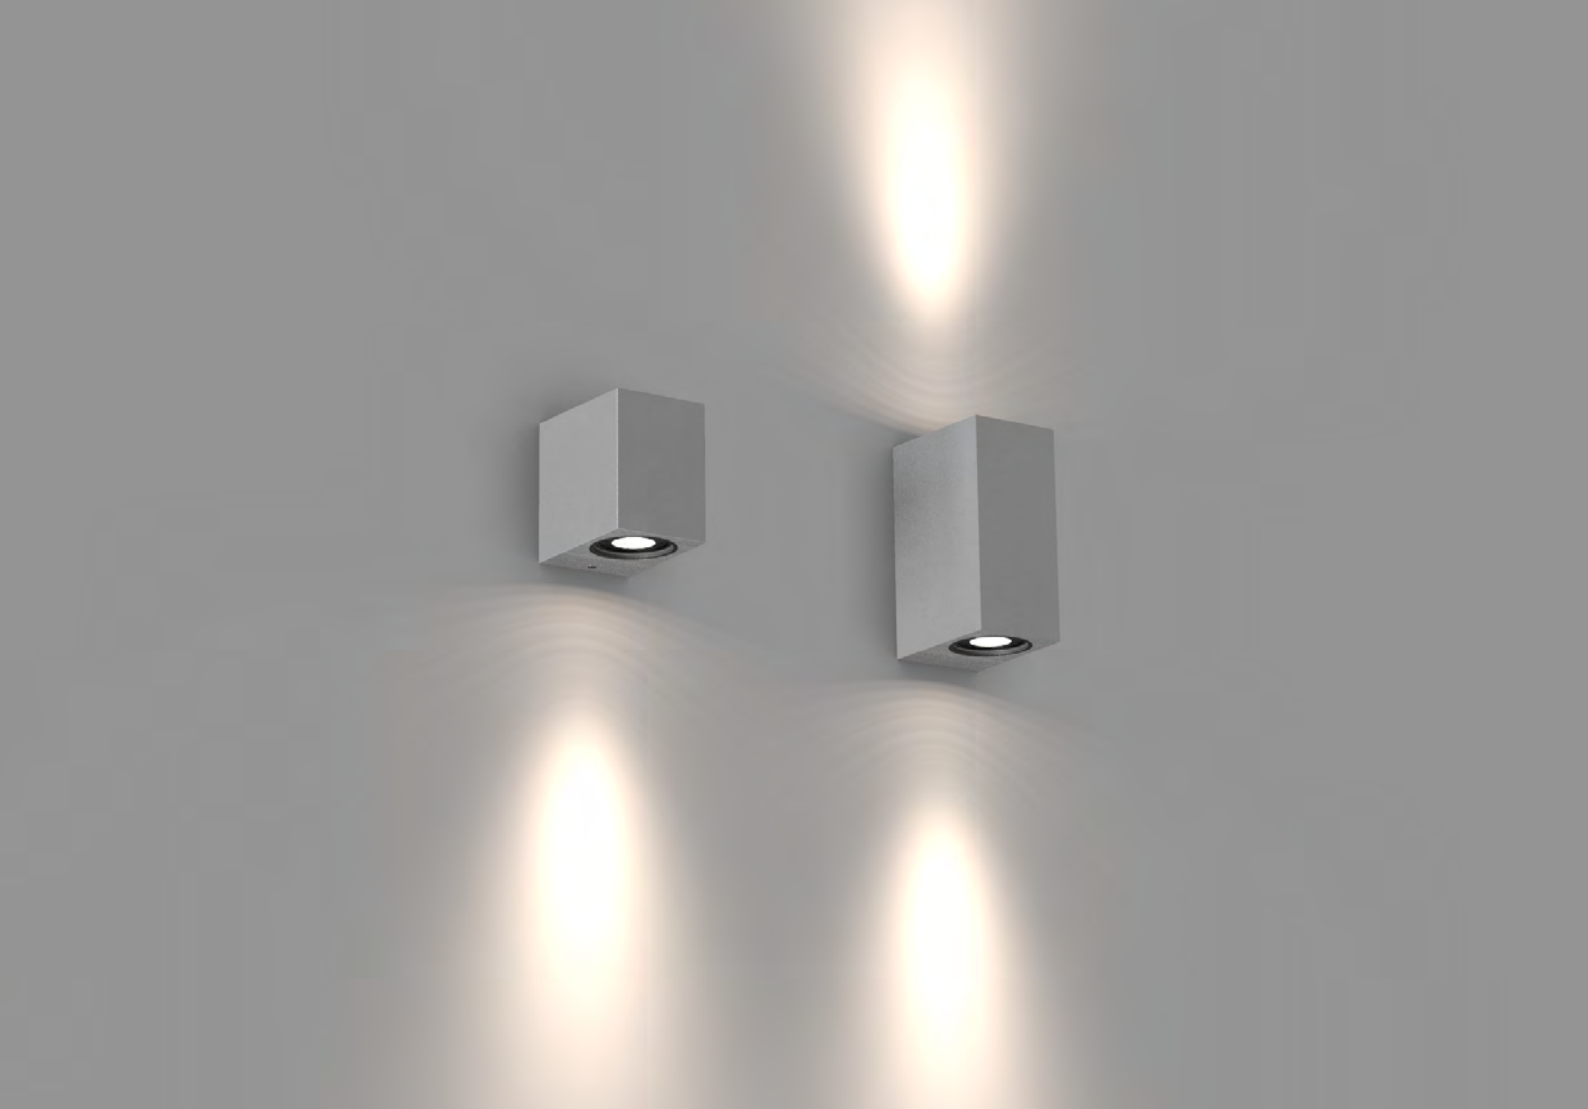


Die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# stainless steel fastness parts.
 3mm thickness tempered glass.
 Fire-resistant Silicon seal gasket.

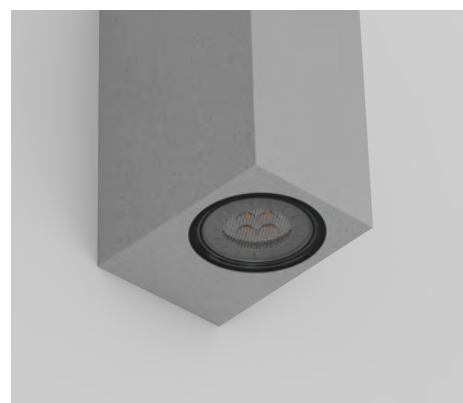




B9587



COB
CREE ±

Driver
TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x COB	CXA1507	2 x10	2 x642lm	3000K	≥80	250mA	24°
2x COB	CXA1507	2 x10	2 x689lm	4000K	≥80	250mA	24°
2x GU10	LED-PAR16	7(max)	/	/	/	/	/
1x COB	CXA1512	15	1052lm	3000K	≥80	350mA	24°
1x COB	CXA1512	15	1125lm	4000K	≥80	350mA	24°

OPTIONAL

FINISH BODY

Standard ● SL

Optional ● BK ○ WH

COLOR TEMP

Standard 3000K 4000K


BEAM ANGLE

Standard Ang. 24°

Optional Ang. 36° Ang. 15°





B9588



COB
CREE ±

Driver
TRIDONIC



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x COB	CXA1507	10	642lm	3000K	≥80	250mA	24°
1x COB	CXA1507	10	689lm	4000K	≥80	250mA	24°
1x GU10	LED-PAR16	7(max)	/	/	/	/	/

OPTIONAL

FINISH BODY

Standard ● SL

Optional ● BK ○ WH


COLOR TEMP

Standard 3000K 4000K

BEAM ANGLE

Standard Ang. 24°

Optional Ang. 36° Ang. 15°

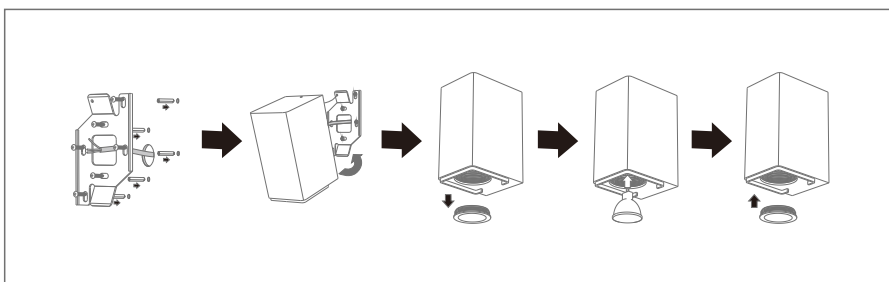


Die-cast aluminum housing with high corrosion resistance.
DuPont outdoor electrostatic powder coating.
304# stainless steel fastness parts.
3mm thickness tempered glass.
Fire-resistant Silicon seal gasket.





B9616



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x GU10	LED-PAR16	7(max)	/	/	/	/	/
1x GU5.3	LED-MR16	7(max)	/	/	/	/	/
1x COB	CXA1512	15	/	3000K	≥80	350mA	24°
1x COB	CXA1512	15	/	4000K	≥80	350mA	24°

OPTIONAL



FINISH BODY	COLOR TEMP	BEAM ANGLE
Standard ● SAM	Standard 3000K 4000K	Standard ■ Ang. 24°
Optional ● BK ○ WH		Optional ■ Ang. 36° ■ Ang. 15°

ACCESSORY

Honeycomb



B9626




SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x GU10	LED-PAR16	7(max)	/	/	/	/	/
2x GU5.3	LED-MR16	7(max)	/	/	/	/	/
2x COB	CXA1512	2x 13	/	3000K	≥80	300mA	24°
2x COB	CXA1512	2x 13	/	4000K	≥80	300mA	24°


OPTIONAL

FINISH BODY	COLOR TEMP	BEAM ANGLE
Standard ● SAM	Standard 3000K 4000K	Standard ■ Ang. 24°
Optional ● BK ○ WH		Optional ■ Ang. 36° ■ Ang. 15°

ACCESSORY

Honeycomb

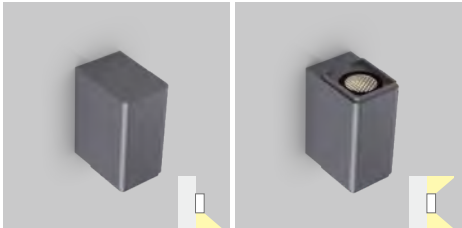


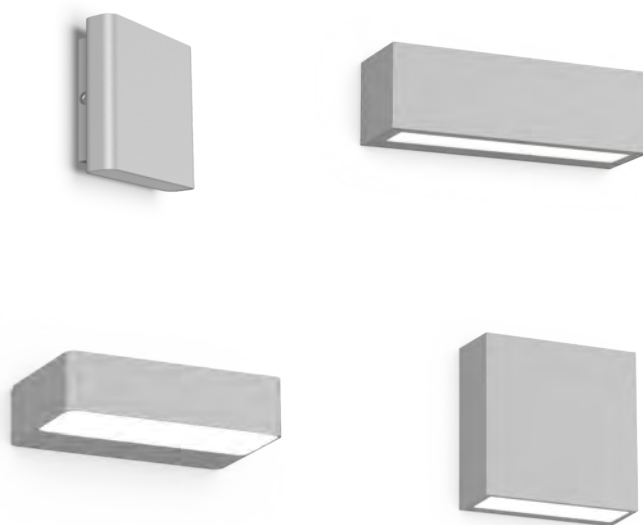


IP65 WALL LIGHT

Die-cast aluminum housing with high corrosion resistance.
DuPont outdoor electrostatic powder coating.
304# stainless steel fastness parts.
3mm thickness tempered glass.
Fire-resistant Silicon seal gasket.



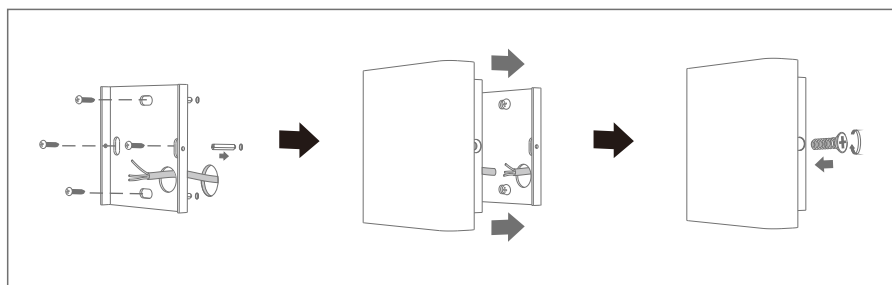


Die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# stainless steel fastness parts.
 3mm thickness tempered glass.
 Fire-resistant Silicon seal gasket.

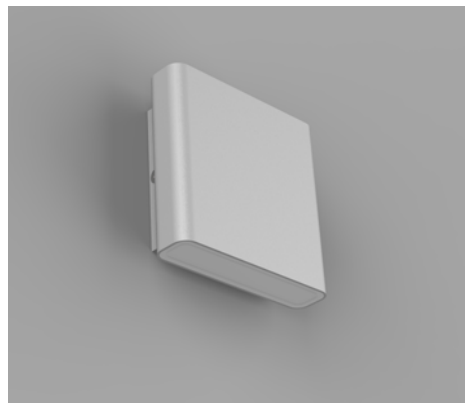



B9594




LED
OSRAM



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x LED	Soft LED	1x 8W	/	/	/	/	/



LED
OSRAM



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x LED	Soft LED	2x 6W	/	/	/	/	/

OPTIONAL

FINISH BODY		COLOR TEMP	
Standard	☒ SL	Standard	☒ 3000K ☐ 4000K
Optional	☐ BK ☐ WH		

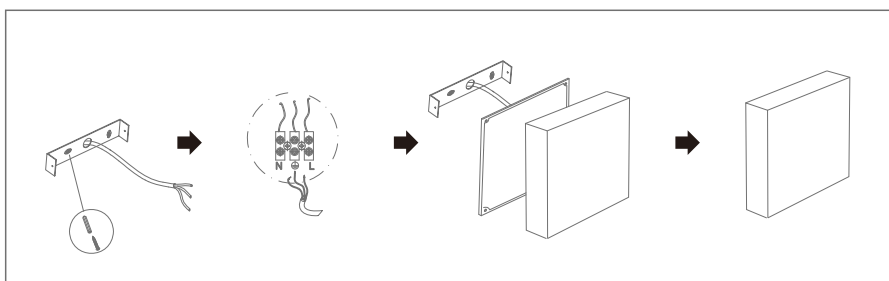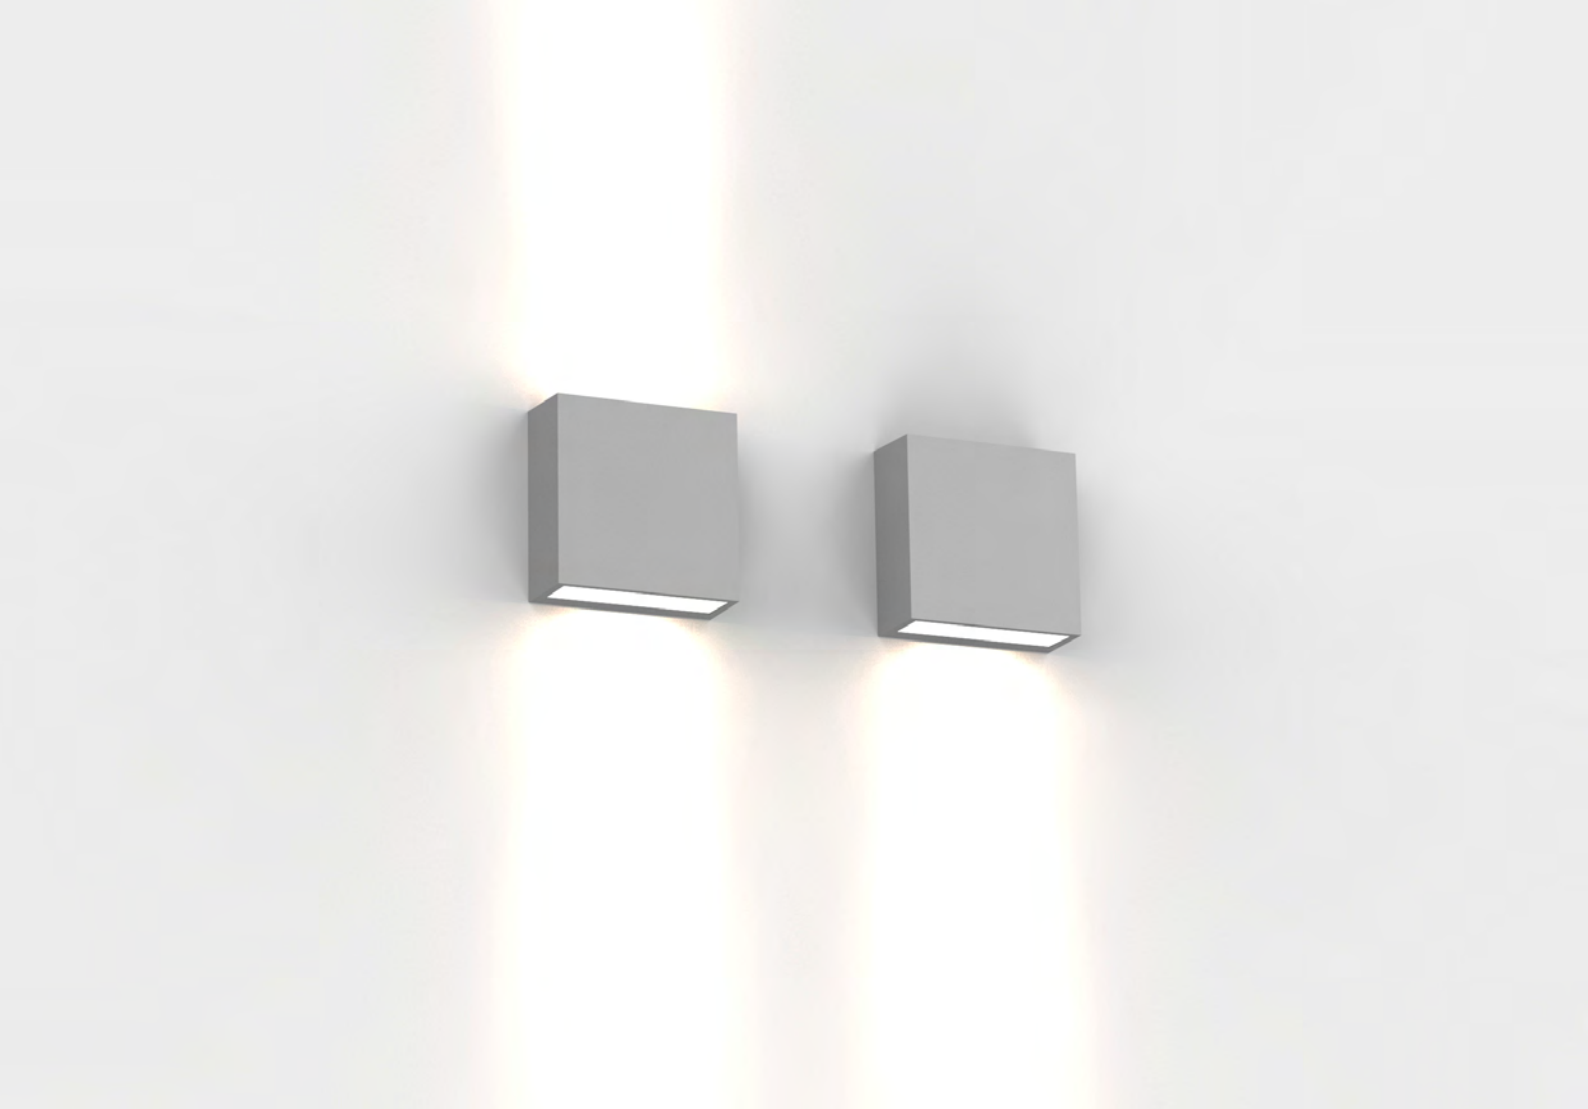


Die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# stainless steel fastness parts.
 3mm thickness tempered glass.
 High purity aluminum heat conduction piece.
 Fire-resistant Silicon seal gasket.





B9589

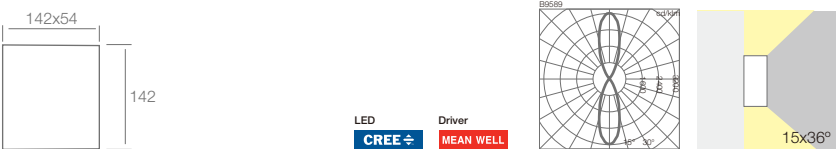

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
2x LED	XT-E	6x 2.5	2x 485lm	3000K	≥80	700mA	15x36°
2x LED	XT-E	6x 2.5	2x 519lm	4000K	≥70	700mA	15x36°

OPTIONAL

- FINISH BODY

Standard

SL

Optional

BK

WH
- COLOR TEMP


Standard

3000K

4000K



B9589

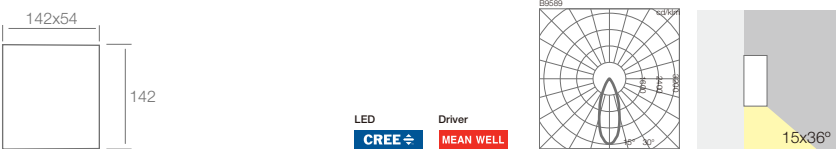

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
1x LED	XT-E	3x 2.5	485lm	3000K	≥80	700mA	15x36°
1x LED	XT-E	3x 2.5	519lm	4000K	≥70	700mA	15x36°

OPTIONAL

- FINISH BODY

Standard

SL

Optional


BK

WH
- COLOR TEMP


Standard


3000K

4000K

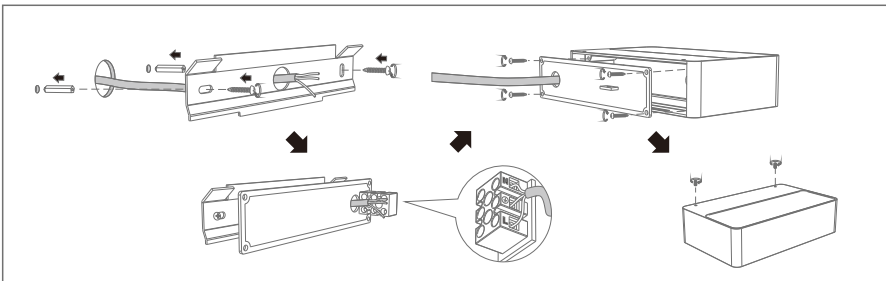


Die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# stainless steel fastness parts.
 3mm thickness tempered glass.
 High purity aluminum heat conduction piece.
 Fire-resistant Silicon seal gasket.

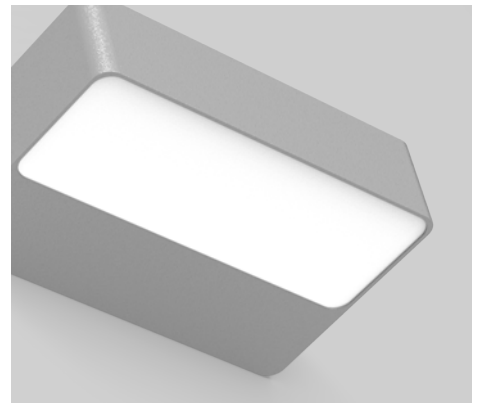

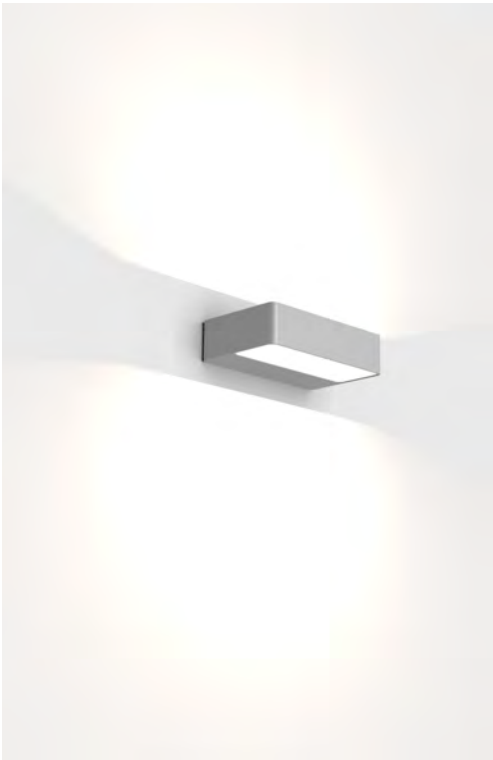

B9590

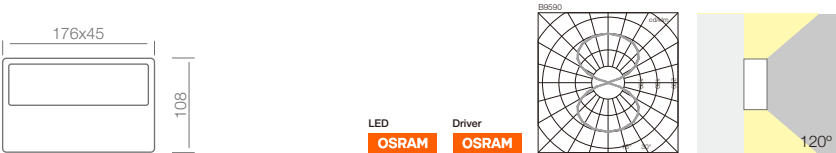

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
LED	36pcs 2835	14.5	651lm	3000K	≥80	350mA	120°
LED	36pcs 2835	14.5	700lm	4000K	≥80	350mA	120°

OPTIONAL

- FINISH BODY

Standard

SL

Optional

BK

WH
- COLOR TEMP


Standard

3000K

4000K



B9590

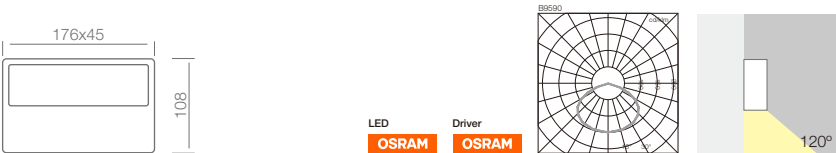

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
LED	36pcs 2835	14.5	676lm	3000K	≥80	350mA	120°
LED	36pcs 2835	14.5	724lm	4000K	≥80	350mA	120°

OPTIONAL

- FINISH BODY

Standard

SL

Optional


BK

WH
- COLOR TEMP


Standard

3000K

4000K

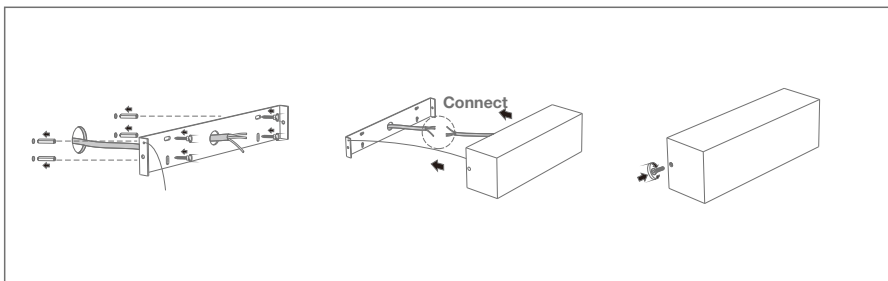


Die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# stainless steel fastness parts.
 3mm thickness tempered glass.
 Fire-resistant Silicon seal gasket.

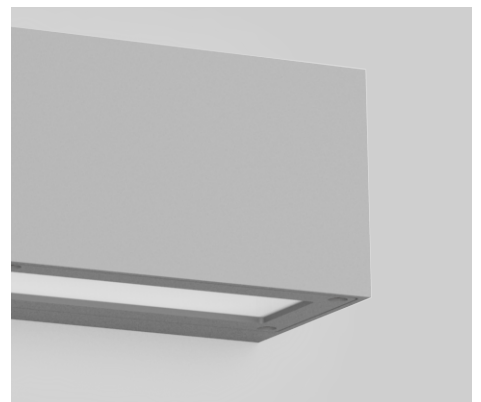





B9600



LED
OSRAM

Driver
OSRAM



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
LED	4x36pcs 2835	37	2x 487lm	3000K	≥80	900mA	120°
LED	4x36pcs 2835	37	2x 522lm	4000K	≥80	900mA	120°

OPTIONAL

FINISH BODY

Standard ● SL


Optional ● BK ○ WH

COLOR TEMP

Standard 3000K 4000K





B9600



LED
OSRAM

Driver
OSRAM



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
LED	2x36pcs 2835	20	487lm	3000K	≥80	500mA	120°
LED	2x36pcs 2835	20	522lm	4000K	≥80	500mA	120°
G5	T5	2x5	/	/	/	/	/

OPTIONAL


FINISH BODY

Standard ● SL

Optional ● BK ○ WH

COLOR TEMP

Standard 3000K 4000K

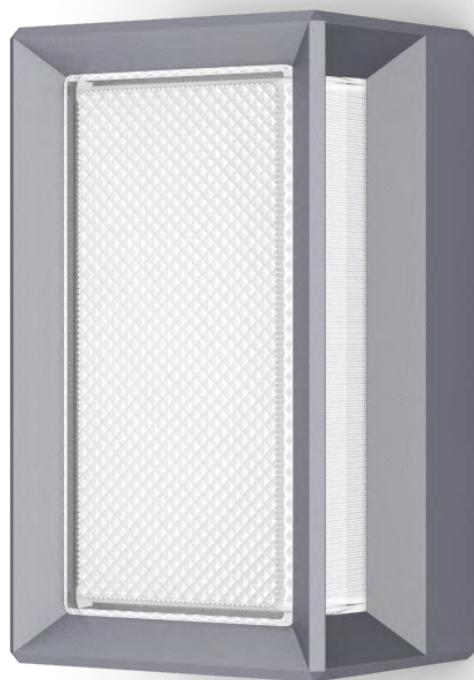


IP65

WALL


LIGHT

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
Tempered glass diffuser, thickness 4mm.
Fire-resistant silicon gasket for good waterproof, IP65.
High purity aluminum heat conduction piece.
304 standard stainless steel fastness part.
DuPont professional outdoor powder coating finished normal thickness 100 micron.
500 hours salt spray test endurance rating.
All wiring, socket and connectors are heat resistant as per IEC.
Luminaires are certified by CE, RoHS.



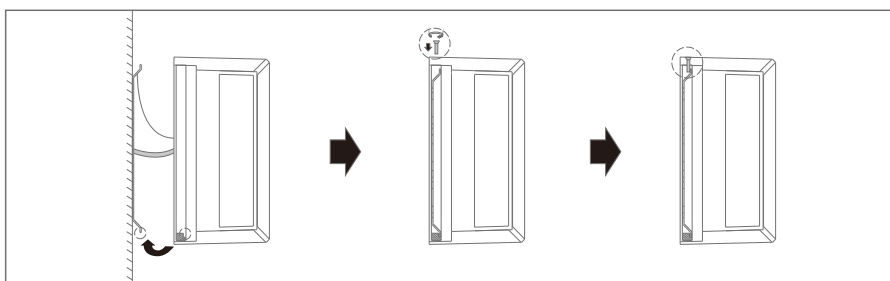


Die-cast aluminum housing and frame with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# standard stainless steel fastness part.
 High purity aluminum heat conduction piece.
 Fire-resistant silicon seal gasket.
 2.0W/(m-k)MCPCB.





B9591



LED

Driver

OSRAM

OSRAM

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
LED	36pcs 2835	10/14.5	/	3000K	≥80	/	/
LED	36pcs 2835	10/14.5	/	4000K	≥70	/	/
E14	Premium LED	6	/	/	≥80	/	/

OPTIONAL

FINISH BODY

Standard

SL


Optional

BK

WH



B9592



LED

Driver

OSRAM

OSRAM

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
LED	36pcs 2835	10/14.5	/	3000K	≥80	/	/
LED	36pcs 2835	10/14.5	/	4000K	≥70	/	/
E14	Premium LED	6	/	/	≥80	/	/

OPTIONAL

FINISH BODY

Standard

SL

Optional

BK

WH



IP65

WALL

LIGHT

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.

Fire-resistant silicon gasket for good waterproof, IP65.

High purity aluminum heat conduction piece.


304 standard stainless steel fastness part.

DuPont professional outdoor powder coating finished normal thickness 100 micron.


500 hours salt spray test endurance rating.

All wiring, socket and connectors are heat resistant as per IEC.

Luminaires are certified by CE, RoHS.

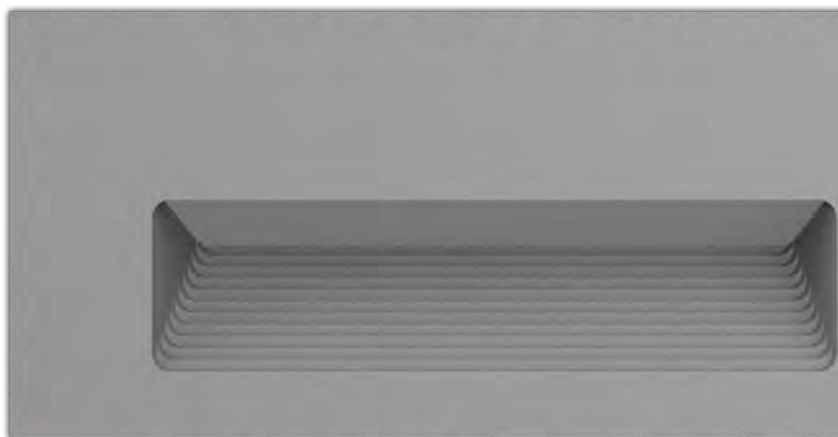



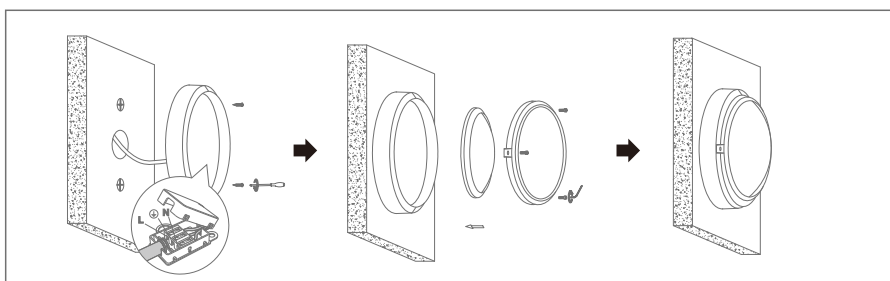

Die-cast aluminum housing and frame with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# standard stainless steel fastness part.
 Diffuser is PC plastic.
 High purity aluminum heat conduction piece.
 Fire-resistant silicon seal gasket.
 2.0W/(m-k)MCPCB.






H9932





H9934

H9932



H9934



LED

Driver

CREE

OSRAM

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
LED	XT-E	11x1.2	946lm	3000K	≥80	350mA	/
LED	XT-E	11x1.2	1012lm	4000K	≥70	350mA	/
LED	XT-E	11x1.7	1277lm	3000K	≥80	500mA	/
LED	XT-E	11x1.7	1366lm	4000K	≥70	500mA	/

OPTIONAL

FINISH BODY

Standard

● BK

Optional

● SL


○ WH


COLOR TEMP

Standard

3000K


4000K



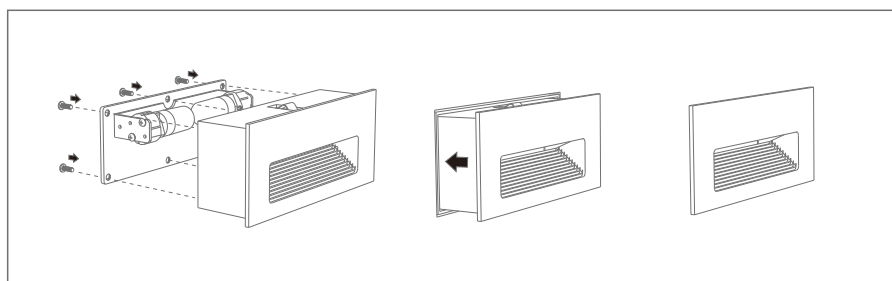


Die-cast aluminum housing and frame with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# standard stainless steel fastness part.
 High purity aluminum heat conduction piece.
 Fire-resistant silicon seal gasket.
 2.0W/(m·k)MCPCB.



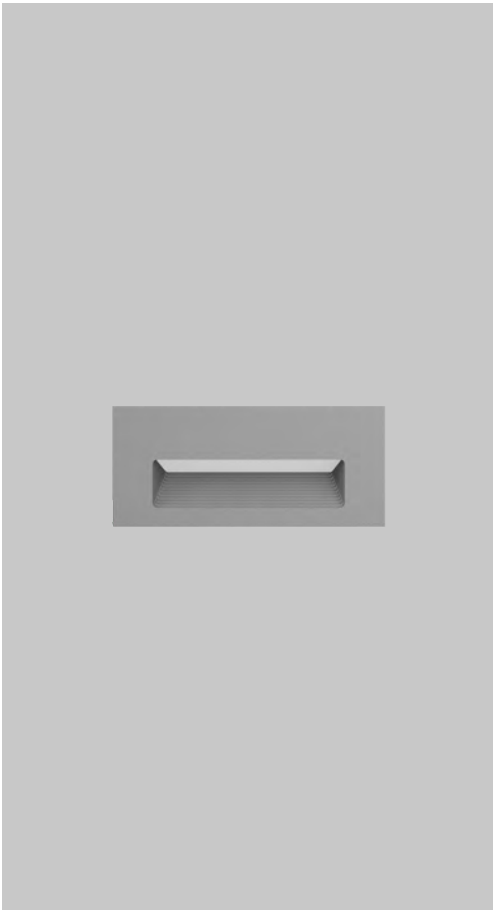

Q9738

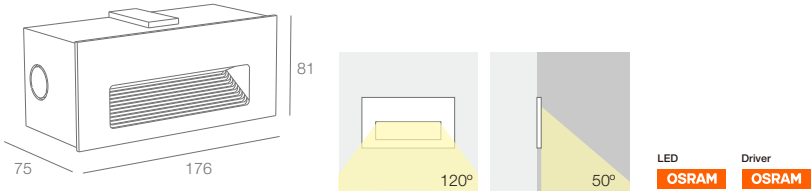

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER	BEAM ANGLE
G9	LED-QT14	2x 4.8(max)	/	/	≥80	/	/
LED	36pcs 2835	7.5	/	3000K	≥80	/	/
LED	36pcs 2835	7.5	/	4000K	≥80	/	/

OPTIONAL

- FINISH BODY
- Standard ☐ SL
- Optional ☒ BK ☐ WH

BOLLARDS IP65

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
Polycarbonate diffuser.
PMMA soft light diffuser.
Fire-resistant silicon gasket for good waterproof, IP65.
High purity aluminum heat conduction piece.
Anodized aluminum reflector.
304 standard stainless steel fastness part.
Internal flange.
J type mounted plate anchors the counter-flange tightly for quick and easy installation.
DuPont professional outdoor powder coating finished normal thickness 100 micron
500 hours salt spray test endurance rating.
All wiring, socket and connectors are heat resistant as per IEC.60598 with CE, VDE.
Luminaires are certified by CE, RoHS.



IP65

BOLLARDS






IP65

BOLLARDS




T9144/T9148/T9168/T9365/L9918

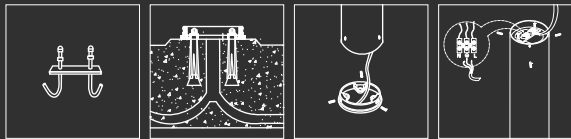

Extruded aluminum housing with high corrosion resistance.
DuPont outdoor electrostatic powder coating.
304# standard stainless steel fastness part.
4mm thickness tempered frosted glass.
High purity aluminum heat conduction piece.
Fire-resistant silicon seal gasket.
2.0W/(m • K) MCPCB.




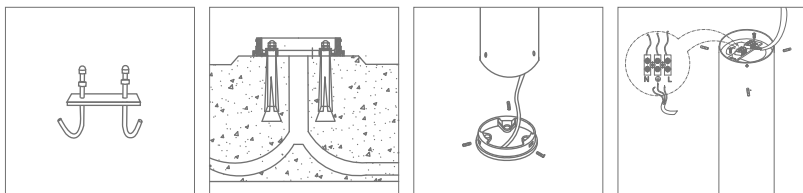



Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# standard stainless steel fastness part.
 Diffuser is PMMA.
 PMMA soft light diffuser.
 High purity aluminum heat conduction piece.
 Fire-resistant silicon seal gasket.
 Anodized aluminum reflector.
 2.0W/(m·k) MCPCB.
 Internal flange.



Optional Accessory
 Inground J type mounting plate

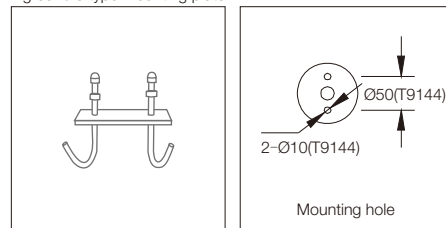

T9144



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XT-E	4x 2.5	180lm	3000K	≥80	700mA
LED	XT-E	4x 2.5	196lm	4000K	≥80	700mA
G9	LED-QT14	4.8(max)	/	/	/	/

OPTIONAL


FINISH BODY


Standard ● BK
Optional ● SL

COLOR TEMP


Standard 3000K 4000K

☐ Inground J type mounting plate





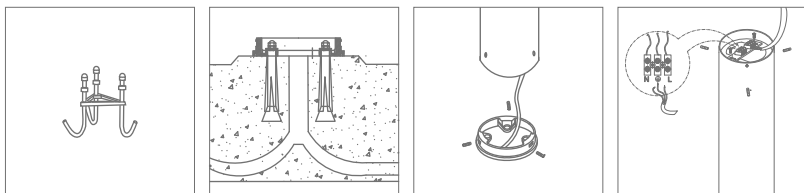

.....get



T9148



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XT-E	12x 1.7	440lm	3000K	≥80	500mA
LED	XT-E	12x 1.7	471lm	4000K	≥80	500mA
LED	XT-E	12x 2.3	520lm	3000K	≥80	700mA
LED	XT-E	12x 2.3	556lm	4000K	≥80	700mA

OPTIONAL


FINISH BODY

Standard ● BK
Optional ● SL



COLOR TEMP

Standard 3000K 4000K

☐ Inground J type mounting plate



T9168



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XT-E	12x 1.7	440lm	3000K	≥80	500mA
LED	XT-E	12x 1.7	471lm	4000K	≥80	500mA
LED	XT-E	12x 2.3	520lm	3000K	≥80	700mA
LED	XT-E	12x 2.3	556lm	4000K	≥80	700mA
LED	XT-E	12x 3	700lm	3000K	≥80	900mA
LED	XT-E	12x 3	749lm	4000K	≥80	900mA

OPTIONAL


FINISH BODY


Standard ● BK
Optional ● SL

COLOR TEMP

Standard 3000K 4000K

☐ Inground J type mounting plate



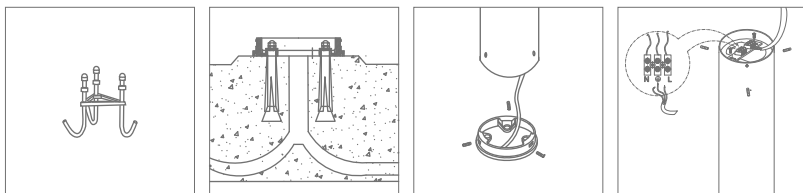

Extruded aluminum and die-cast aluminum housing with high corrosion resistance.

DuPont outdoor electrostatic powder coating.

304 standard stainless steel fastness part.

Diffuser is polycarbonate plastic.



High purity aluminum heat conduction piece.

Fire-resistant silicon seal gasket.



Anodized aluminum reflector.

2.0W/(m • K) MCPCB.

Optional Accessory
Inground J type mounting plate



T9365



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XT-E	12x3	800lm	3000K	≥80	900mA
LED	XT-E	12x3	856lm	4000K	≥80	900mA

OPTIONAL

FINISH BODY

- Standard●BK
- Optional●SL

COLOR TEMP

- Standard
- 3000K
- 4000K


☐ Inground J type mounting plate

LED

CREE


Driver

OSRAM





L9918



LED


CREE

Driver

OSRAM

MEAN WELL

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XT-E	12x3	800lm	3000K	≥80	900mA
LED	XT-E	12x3	856lm	4000K	≥80	900mA
LED	XT-E	18x2.5	1000lm	3000K	≥80	700mA
LED	XT-E	18x2.5	1070lm	4000K	≥80	700mA



OPTIONAL

FINISH BODY

Standard

BK

Optional


SL

COLOR TEMP

Standard

3000K

4000K




OPTIONAL ACCESSORY

DECORATIVE BASE COVER



MOUNTING HOLE





IP65

BOLLARDS




L9894/L9893




Extruded aluminum housing with high corrosion resistance.
DuPont outdoor electrostatic powder coating.
304# standard stainless steel fastness part.
4mm thickness tempered frosted glass.
High purity aluminum heat conduction piece.
Fire-resistant silicon seal gasket.
2.0W/(m • K) MCPCB.



IP65

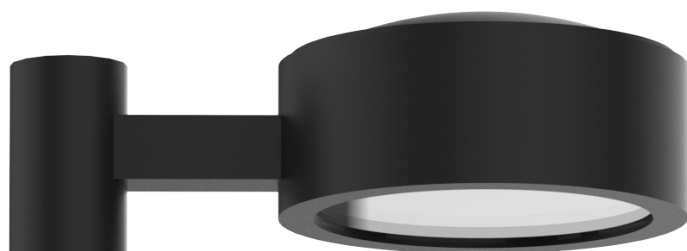


L9893



LED	Driver
CREE	OSRAM
	PHILIPS

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXA2530	42	/	3000K	≥80	1050mA
COB	CXA2530	42	/	4000K	≥80	1050mA




OPTIONAL

FINISH BODY

Standard ● BK
Optional ● SL

COLOR TEMP

Standard 3000K 4000K

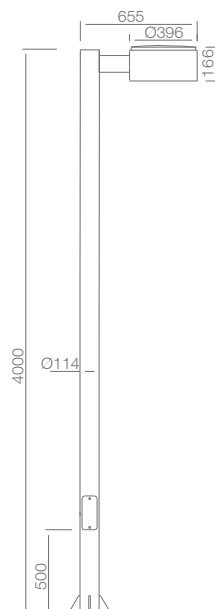


OPTIONAL ACCESSORY

DECORATIVE BASE COVER



MOUNTING HOLE






IP65




L9894



LED	Driver
CREE	OSRAM
	PHILIPS

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXA2530	42	/	3000K	≥80	1050mA
COB	CXA2530	42	/	4000K	≥80	1050mA




OPTIONAL

FINISH BODY

Standard ● BK
Optional ● SL

COLOR TEMP

Standard 3000K 4000K

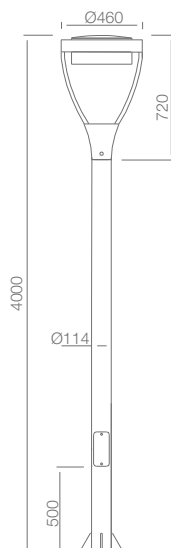


OPTIONAL ACCESSORY

DECORATIVE BASE COVER




MOUNTING HOLE





IP65


BOLLARDS

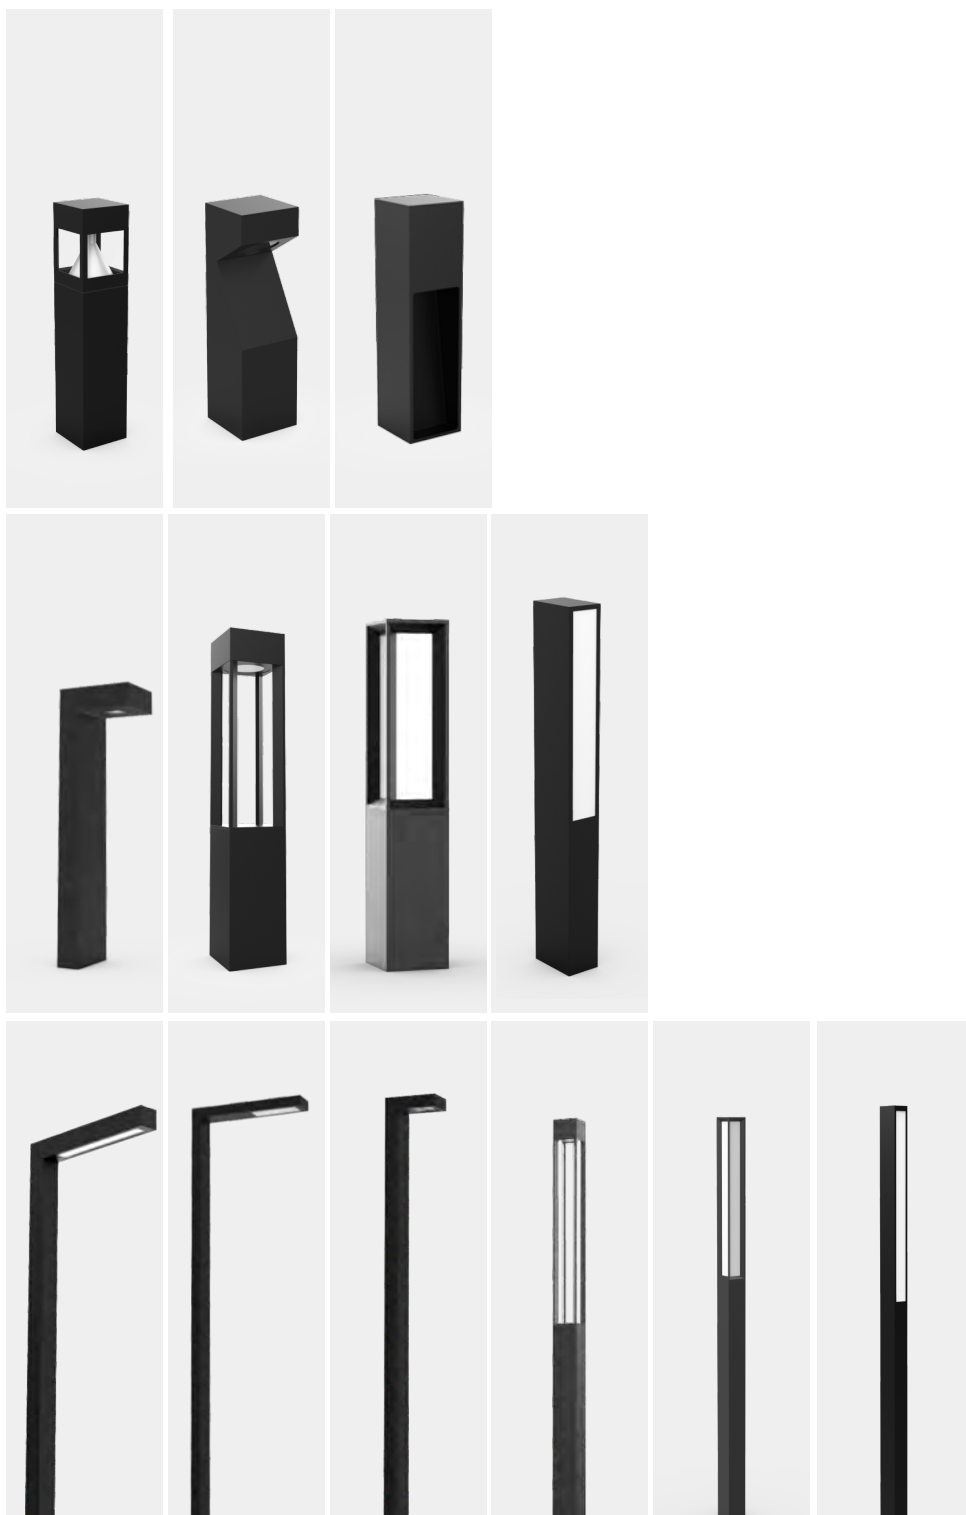




IP65



BOLLARDS

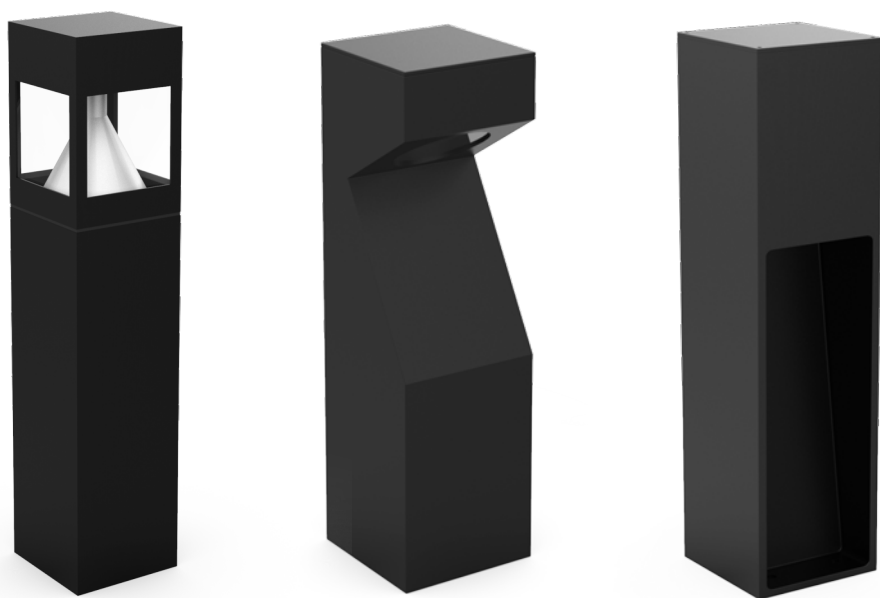


T9156/T9160/T9238

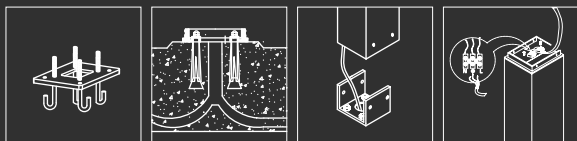


Extruded aluminum housing with high corrosion resistance.
DuPont outdoor electrostatic powder coating.
304# standard stainless steel fastness part.
4mm thickness tempered frosted glass.
High purity aluminum heat conduction piece.
Fire-resistant silicon seal gasket.
2.0W/(m • K) MCPCB.

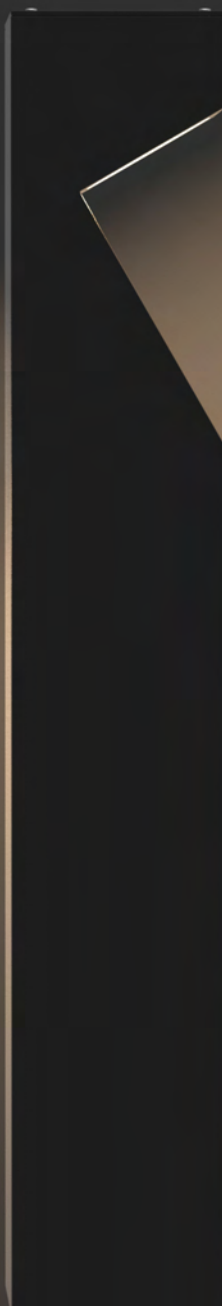
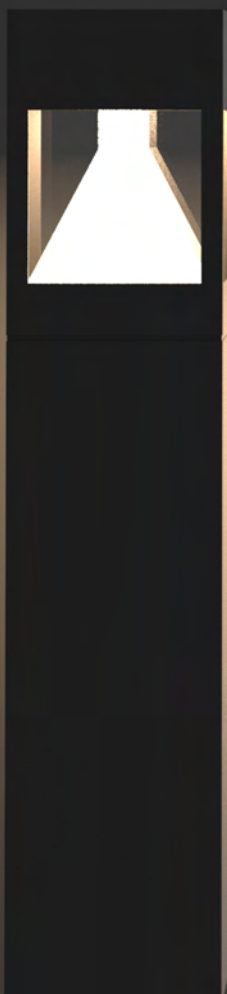


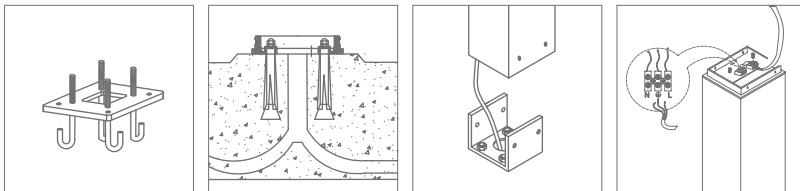




Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# standard stainless steel fastness part.
 Diffuser is polycarbonate plastic.
 PMMA soft light diffuser.
 High purity aluminum heat conduction piece.
 Fire-resistant silicon seal gasket.
 Anodized aluminum reflector.
 2.0W/(m·k) MCPCB.
 Internal flange.

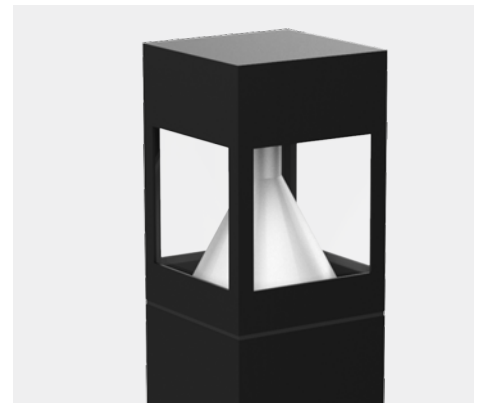

Optional Accessory:



T9156

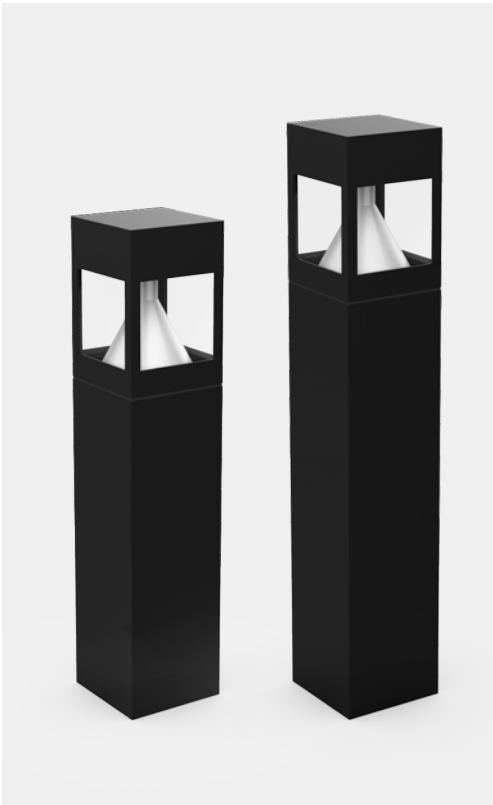

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XT-E	12x 1.7	440lm	3000K	≥80	500mA
LED	XT-E	12x 1.7	471lm	4000K	≥80	500mA
LED	XT-E	12x 2.3	520lm	3000K	≥80	700mA
LED	XT-E	12x 2.3	556lm	4000K	≥80	700mA
LED	XT-E	12x 3	700lm	3000K	≥80	900mA
LED	XT-E	12x 3	749lm	4000K	≥80	900mA

OPTIONAL

FINISH BODY

- Standard●BK
- Optional●SL

COLOR TEMP

- Standard
- 3000K
- 4000K

- ☐ Inground J type mounting plate
- ☐ Opal glass diffuser


LED


CREE

Driver


OSRAM

TRIDONIC




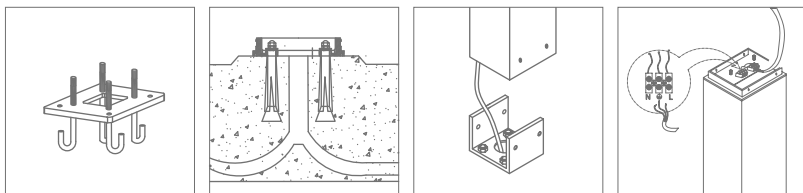



Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
 DuPont outdoor electrostatic powder coating.
 304# standard stainless steel fastness part.
 4mm thickness tempered glass.
 High purity aluminum heat conduction piece.
 Fire-resistant silicon seal gasket.
 Anodized aluminum reflector.
 2.0W/(m-k) MCPCB.
 Internal flange.

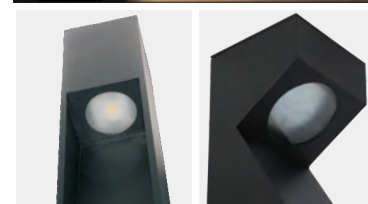

Optional Accessory:
 Inground J type mounting plate

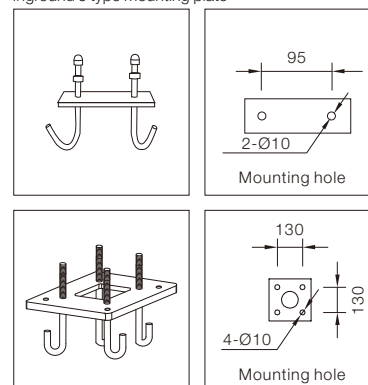

T9160

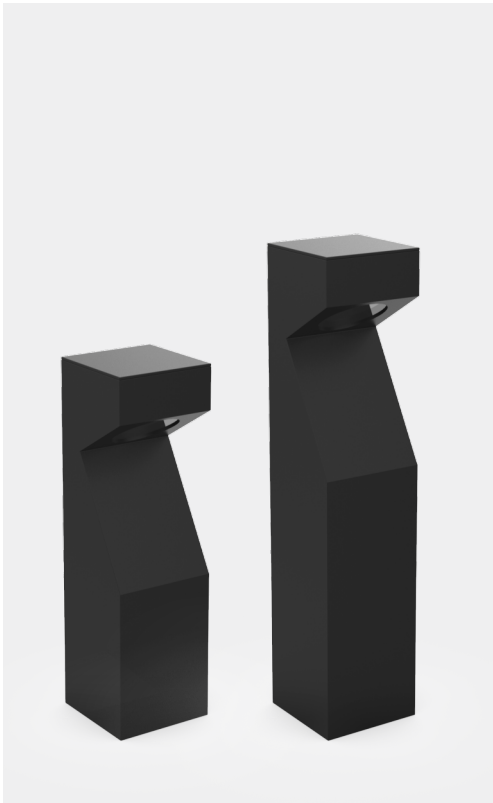

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XT-E	9x 2.5	684lm	3000K	≥80	700mA
LED	XT-E	9x 2.5	744lm	4000K	≥80	700mA

OPTIONAL



FINISH BODY

- Standard ● BK
- Optional ● SL



COLOR TEMP

- Standard 3000K 4000K

☐ Inground J type mounting plate



T9238

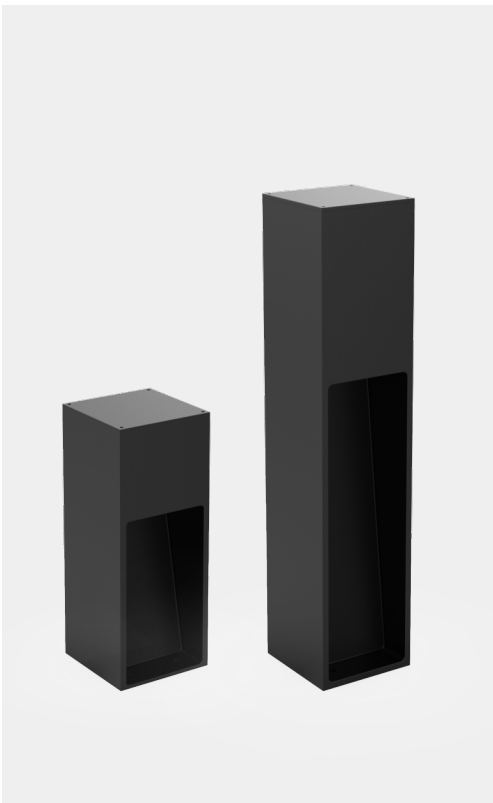

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXA1512	15	184lm	3000K	≥80	350mA
COB	CXA1512	15	197lm	4000K	≥80	350mA
COB	CXA2520	30	368lm	3000K	≥80	700mA
COB	CXA2520	30	383lm	4000K	≥80	700mA

OPTIONAL

FINISH BODY


- Standard ● BK
- Optional ● SL

COLOR TEMP



- Standard 3000K 4000K

☐ Inground J type mounting plate

☐ Decorative base cover




Decorative base cover



IP65


BOLLARDS

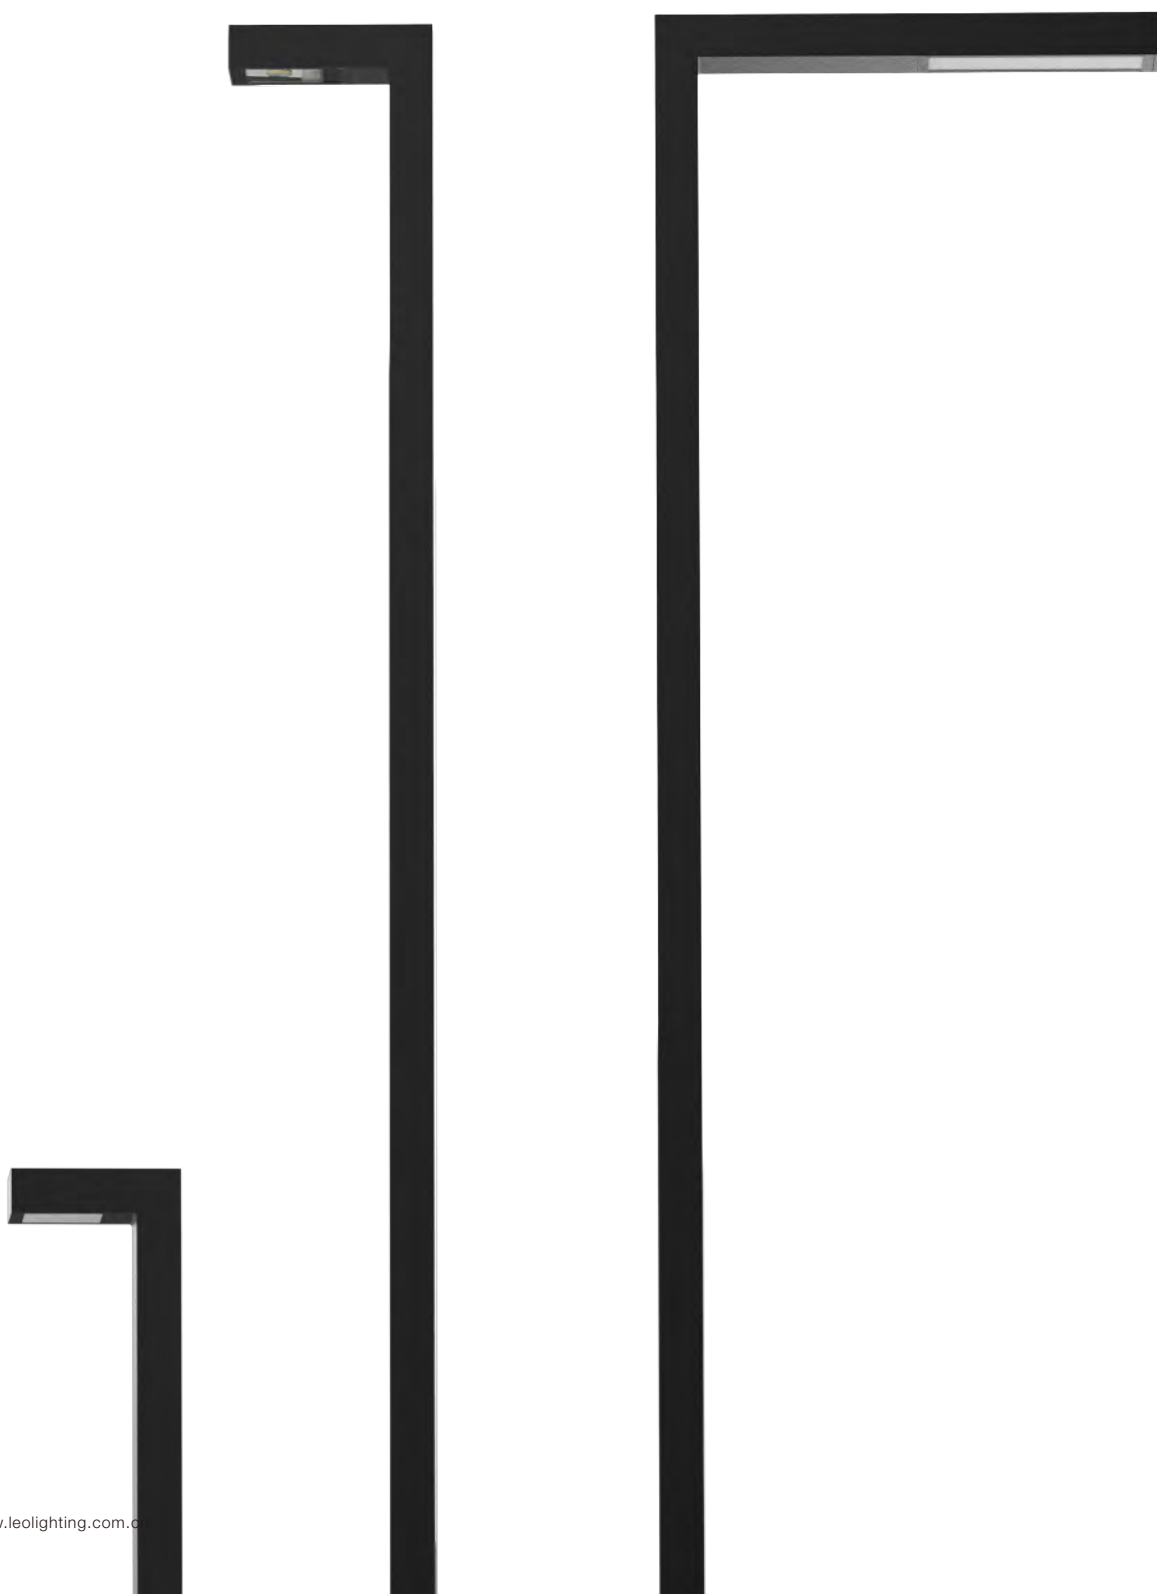

T9232/L9920/L9888




Extruded aluminum housing with high corrosion resistance.
DuPont outdoor electrostatic powder coating.
304# standard stainless steel fastness part.
4mm thickness tempered frosted glass.
High purity aluminum heat conduction piece.
Fire-resistant silicon seal gasket.
2.0W/(m • K) MCPCB.

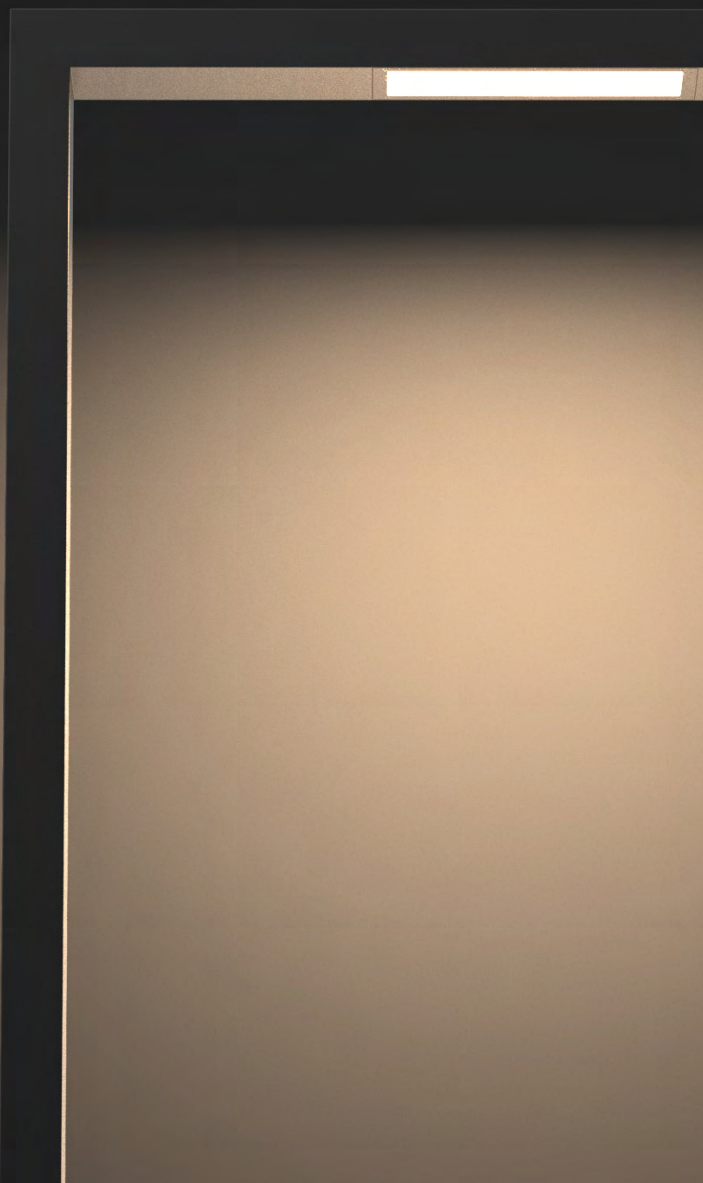


IP65



T9232



CXA



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXA2520	20	722lm	3000K	≥80	500mA
COB	CXA2520	20	772lm	4000K	≥80	500mA
COB	CXA2520	30	946lm	3000K	≥80	700mA
COB	CXA2520	30	1012lm	4000K	≥80	700mA

OPTIONAL

FINISH BODY

Standard ● BK


Optional ● SL

COLOR TEMP


Standard

3000K


4000K



T9232



XPG-2



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XPG-2	35	2803lm	3000K	≥80	700mA
LED	XPG-2	35	2916lm	4000K	≥80	700mA

BEAM ANGLE Ang. 45°x155° Ang. 65°x155° Ang. 80°x155°

OPTIONAL

FINISH BODY

Standard ● BK


Optional ● SL

COLOR TEMP

Standard

3000K

4000K

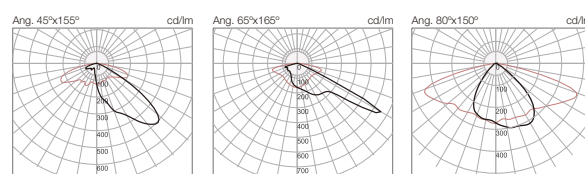




IP65



L9920(H4000)


L9920(H3000)

L9920



LED	Driver
CREE	OSRAM
	PHILIPS

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXA2530	42	2800lm	3000K	≥80	1050mA
COB	CXA2530	42	2996lm	4000K	≥80	1050mA




OPTIONAL

FINISH BODY

Standard ● BK
Optional ● SL

COLOR TEMP

Standard 3000K 4000K

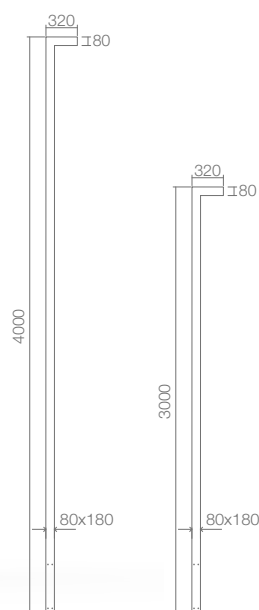


OPTIONAL ACCESSORY

DECORATIVE BASE COVER



MOUNTING HOLE






IP65



L9888



XPG-2

NEW


LED

CREE

Driver

OSRAM

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XPG-2	48x 1.43	7492lm	3000K	≥80	1350mA
LED	XPG-2	48x 1.43	7791lm	4000K	≥80	1350mA
BEAM ANGLE	 Ang. 45°x155°		 Ang. 65°x155°		 Ang. 80°x155°	



XT-E

LED


CREE

Driver

OSRAM

PHILIPS

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XT-E	18x 3	3150lm	3000K	≥80	900mA
LED	XT-E	18x 3	3370lm	4000K	≥70	900mA

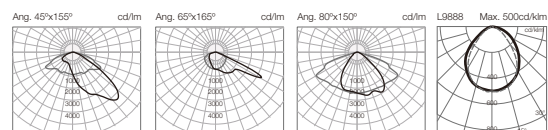

OPTIONAL

FINISH BODY

Standard ● BK

Optional ● SL

COLOR TEMP

Standard

3000K



4000K

OPTIONAL ACCESSORY


DECORATIVE BASE COVER




MOUNTING HOLE

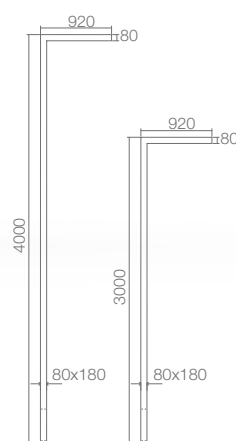



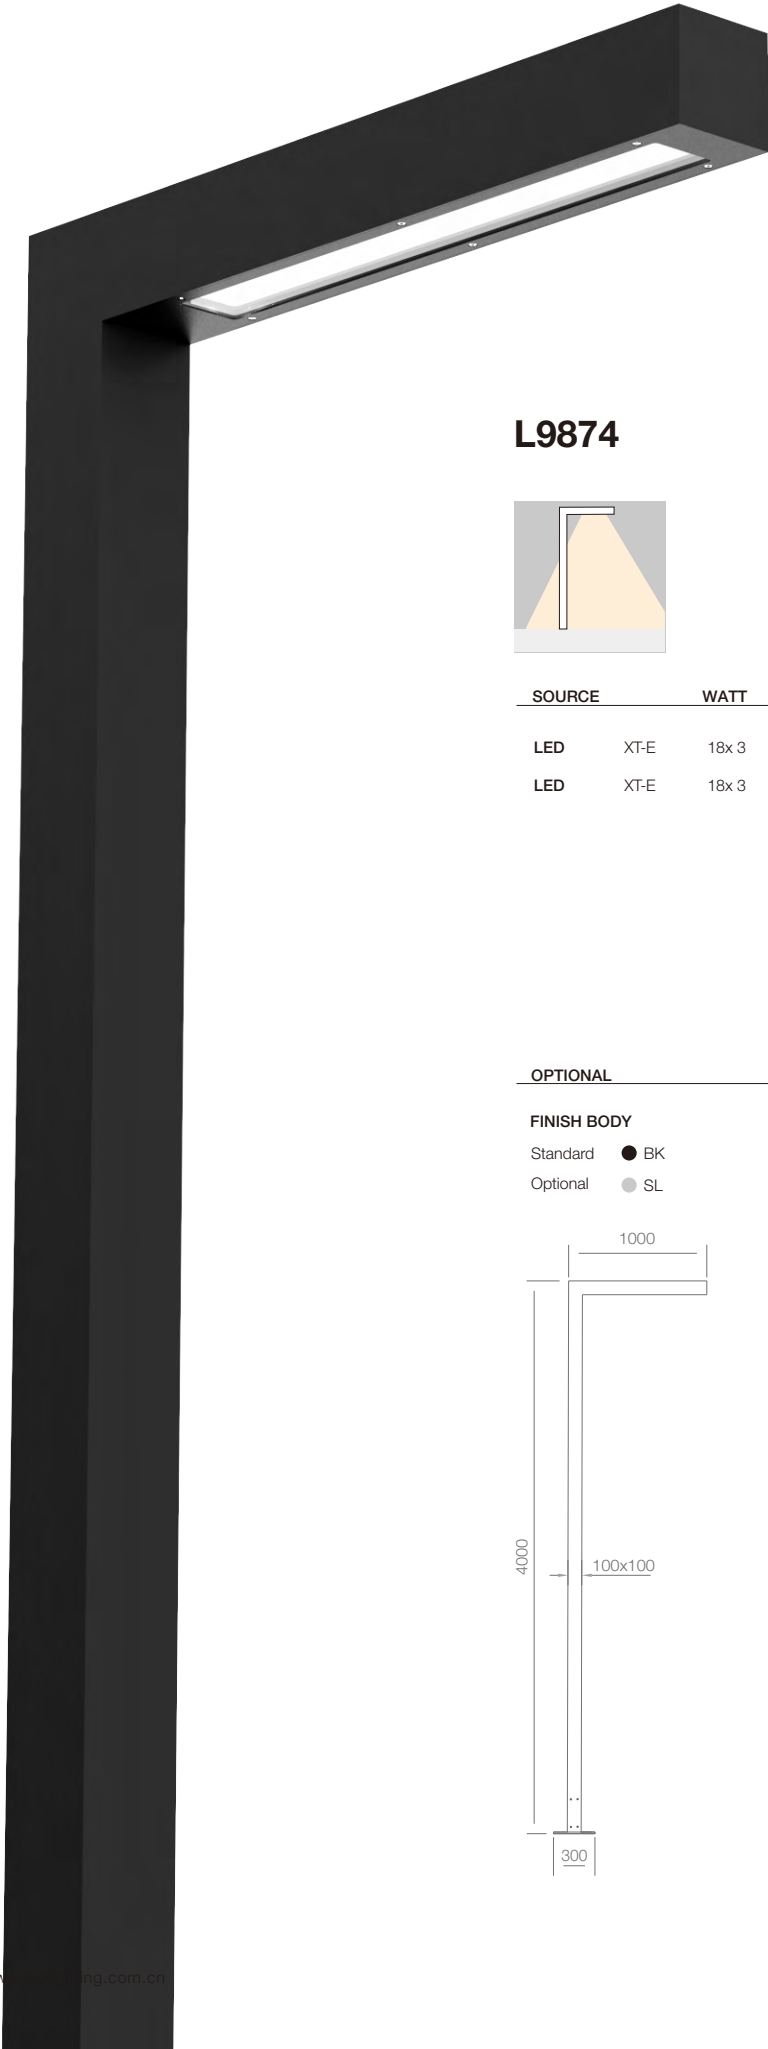


L9874




LED	Driver
CREE	OSRAM
	PHILIPS

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
LED	XT-E	18x 3	1977lm	3000K	≥80	900mA
LED	XT-E	18x 3	2155lm	4000K	≥80	900mA



OPTIONAL

FINISH BODY	COLOR TEMP
Standard ● BK	Standard 3000K 4000K
Optional ● SL	

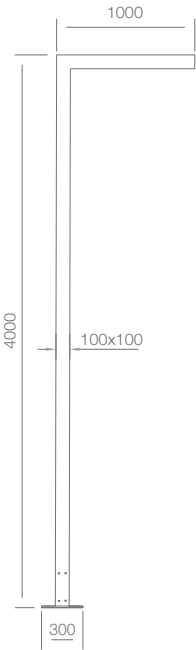


OPTIONAL ACCESSORY

DECORATIVE BASE COVER




MOUNTING HOLE






IP65


BOLLARDS

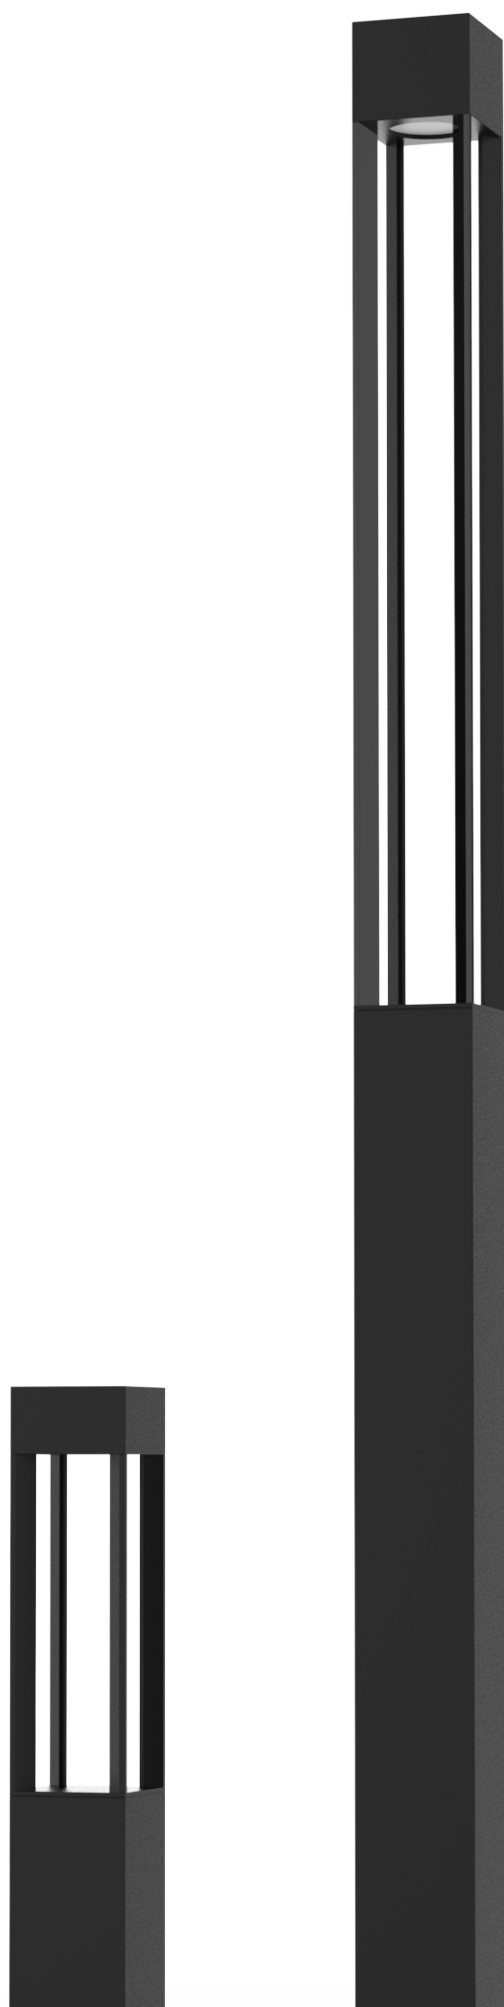


T9240/L9891



Extruded aluminum housing with high corrosion resistance.
DuPont outdoor electrostatic powder coating.
304# standard stainless steel fastness part.
4mm thickness tempered frosted glass.
High purity aluminum heat conduction piece.
Fire-resistant silicon seal gasket.
2.0W/(m · k) MCPCB.

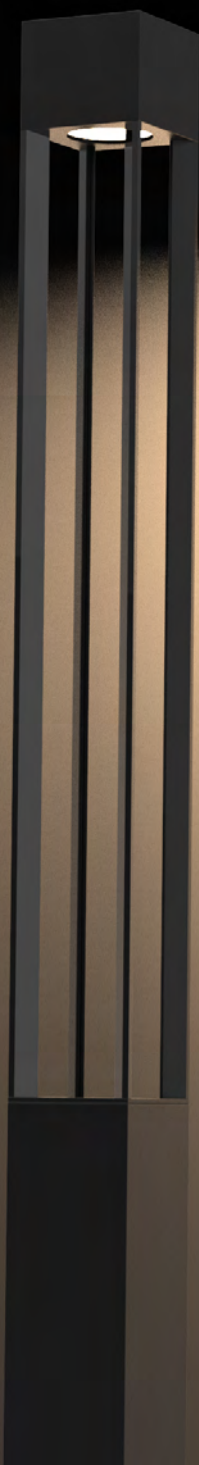

T9240



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXA2520	30	1227lm	3000K	≥80	700mA
COB	CXA2520	30	1313lm	4000K	≥80	700mA

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXB2530	30	2680lm	3000K	≥80	700mA
COB	CXB2530	30	2790lm	4000K	≥80	700mA

OPTIONAL



FINISH BODY

Standard ● BK
Optional ● SL


COLOR TEMP

Standard 3000K 4000K

☐ Inground J type mounting plate



T9240



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXA2530	42	1694lm	3000K	≥80	1050mA
COB	CXA2530	42	1812lm	4000K	≥80	1050mA

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXB2530	42	3680lm	3000K	≥80	1050mA
COB	CXB2530	42	3827lm	4000K	≥80	1050mA

OPTIONAL



FINISH BODY

Standard ● BK
Optional ● SL

COLOR TEMP

Standard 3000K 4000K

☐ Inground J type mounting plate





IP65



L9891

Frosted glass




LED

CREE

Driver

OSRAM



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXA2530	42	1798lm	3000K	≥80	1050mA
COB	CXA2530	42	1924lm	4000K	≥80	1050mA

Transparent glass
+Reflector

NEW




LED


CREE

Driver

OSRAM



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
COB	CXB2540	60	4528lm	3000K	≥80	1400mA
COB	CXB2540	60	4709lm	4000K	≥80	1400mA



OPTIONAL

FINISH BODY

Standard ● BK


Optional ● SL

COLOR TEMP

Standard

3000K

4000K


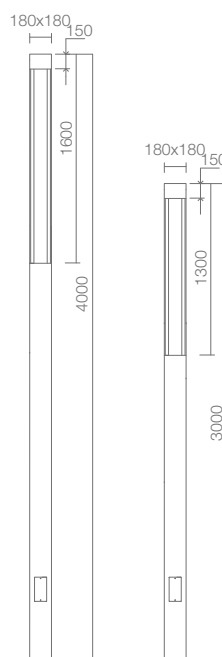


OPTIONAL ACCESSORY

DECORATIVE BASE COVER



MOUNTING HOLE






IP65

BOLLARDS



T9255/L9915



Extruded aluminum and die-cast aluminum housing with high corrosion resistance.

DuPont outdoor electrostatic powder coating.

304# stainless steel fastness parts.

Diffuser is PMMA plastic.



High purity aluminum heat conduction piece.

Fire-resistant Silicon seal gasket.





T9255



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
4xLED	soft LED	4x 9	3025lm	3000K	≥80	900mA
4xLED	soft LED	4x 9	3146lm	4000K	≥80	900mA

OPTIONAL


FINISH BODY

- Standard●BK
- Optional●SL


COLOR TEMP

- Standard
- 3000K
- 4000K


☐ Inground J type mounting plate





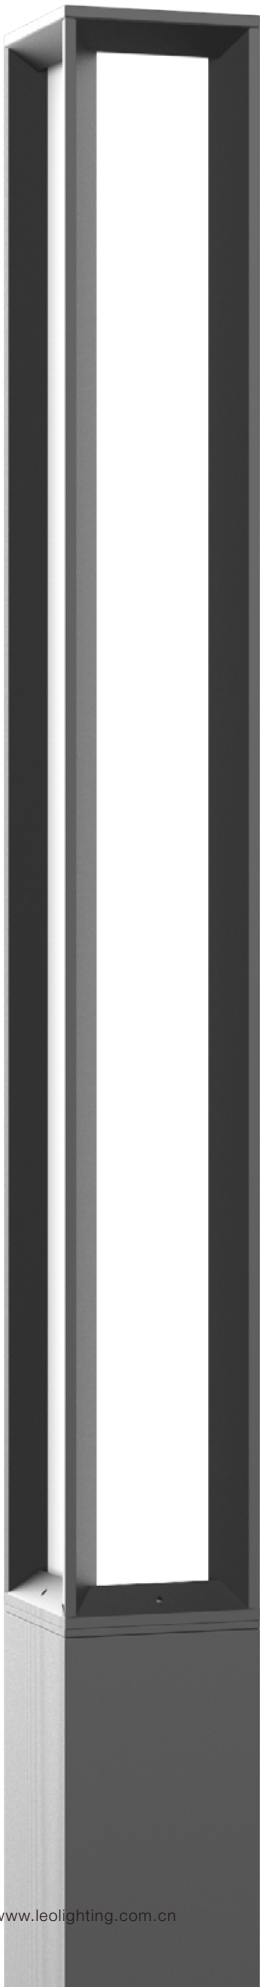

L9915



LED


OSRAM

TRIDONIC

Driver

OSRAM

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
4xLED	soft LED	4x 18	6730lm	3000K	≥80	900mA
4xLED	soft LED	4x 18	7000m	4000K	≥80	900mA



OPTIONAL

FINISH BODY

Standard ● BK


Optional ● SL

COLOR TEMP

Standard

3000K

4000K




OPTIONAL ACCESSORY

DECORATIVE BASE COVER



MOUNTING HOLE






IP65

BOLLARDS



T9194/L9890



Extruded aluminum and die-cast aluminum housing with high corrosion resistance.


DuPont outdoor electrostatic powder coating.

304# stainless steel fastness parts.

Diffuser is PMMA plastic.


High purity aluminum heat conduction piece.

Fire-resistant Silicon seal gasket.

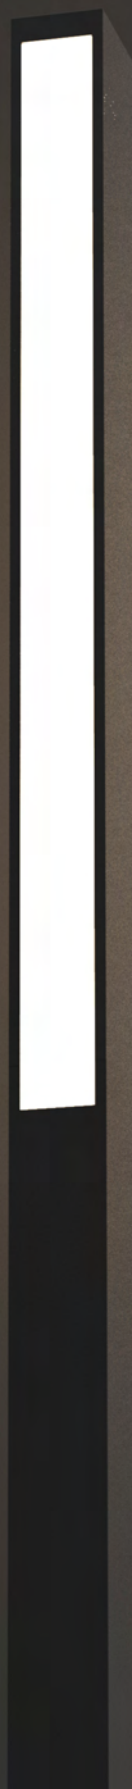



T9194



SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
1xLED	soft LED	1x 12.5	400lm	3000K	≥80	350mA
1xLED	soft LED	1x 12.5	414m	4000K	≥80	350mA
2xLED	soft LED	2x 12.5	800lm	3000K	≥80	700mA
2xLED	soft LED	2x 12.5	828m	4000K	≥80	700mA
T8	LEDtube	8	/	/	/	/

OPTIONAL



FINISH BODY

- Standard
- BK
- Optional
- SL

COLOR TEMP

- Standard
- 3000K
- 4000K


☐ Inground J type mounting plate








L9890



LED **OSRAM** Driver **OSRAM**

SOURCE		WATT	LUMEN	CCT	CRI	DRIVER
2xLED	soft LED	2x 12.5	800lm	3000K	≥80	700mA
2xLED	soft LED	2x 12.5	828m	4000K	≥80	700mA
4xLED	soft LED	4x 12.5	1600lm	3000K	≥80	700mA
4xLED	soft LED	4x 12.5	1712m	4000K	≥80	700mA
T8	LEDtube	18	/	/	/	/




OPTIONAL

FINISH BODY

Standard ● BK
Optional ● SL

COLOR TEMP

Standard 3000K 4000K

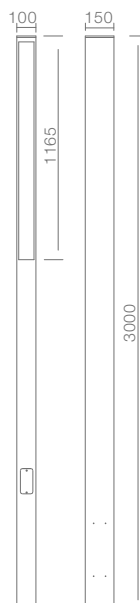


OPTIONAL ACCESSORY

DECORATIVE BASE COVER



MOUNTING HOLE







INDOOR LIGHT



A1521/A1001



A2441/A2521



A2531



A0491



A2171/A2241



A2371/A2321



A0571/A0581



A1041



A2331



A2131



A0481



A1381



A1382



A1391



A1392



A1341



A1342



A1343



D8111



D8161



C6591



C6881



C6741/C6742



C6701




C6871




C6481/C6431/C6432



C6321/C6322

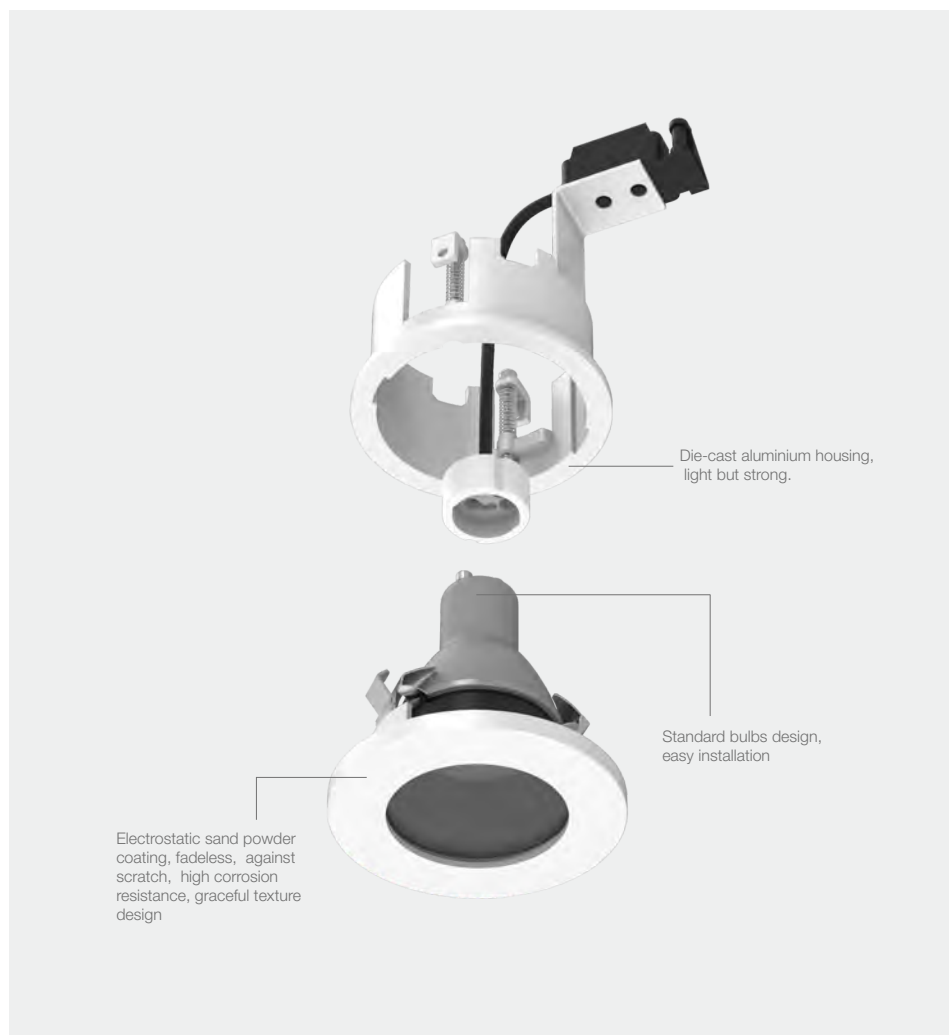

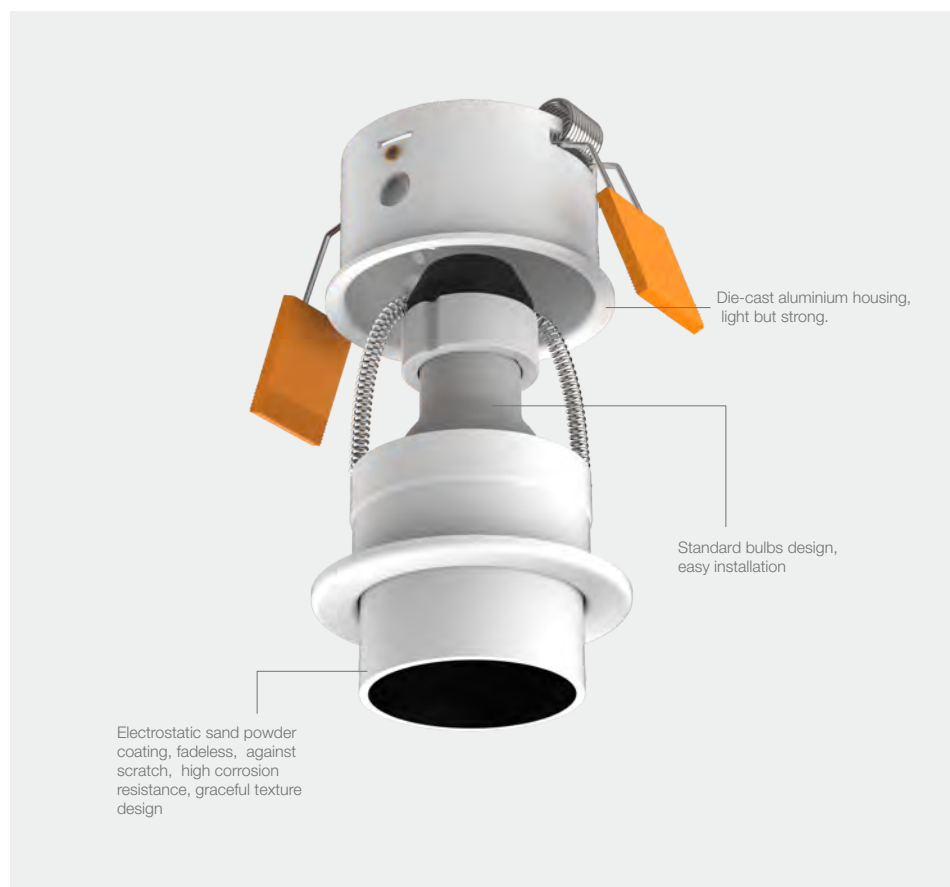



BATHROOM RECESSED DOWN LIGHTS

Recessed light source.
With pre-installation bracket.
Die-cast aluminum housing.
Tempered glass thinckness 3mm.



A1521/A1001



A2441/A2521



A2531



A0491





IP55



IP55

A1521




 **GU10**



LED-PAR16

1x 7W max



123(GU10)
103(GU5.3)

 **GU5.3**



LED-MR16

1x 7W max



Ø70mm

A1001




 **GU10**



LED-PAR16

1x 7W max



123(GU10)
103(GU5.3)

 **GU5.3**




LED-MR16

1x 7W max



Ø70mm

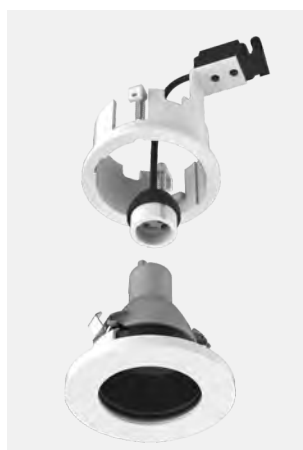

OPTIONAL

FINISH OPTIONAL ● :Standard

Finish body ●  WH  BK






IP44



IP44

A2441




	GU10	
LED-PAR16	1x 7W max	
	GU5.3	
LED-MR16	1x 7W max	

A2521



	GU10	
LED-PAR16	1x 7W max	
	GU5.3	
LED-MR16	1x 7W max	

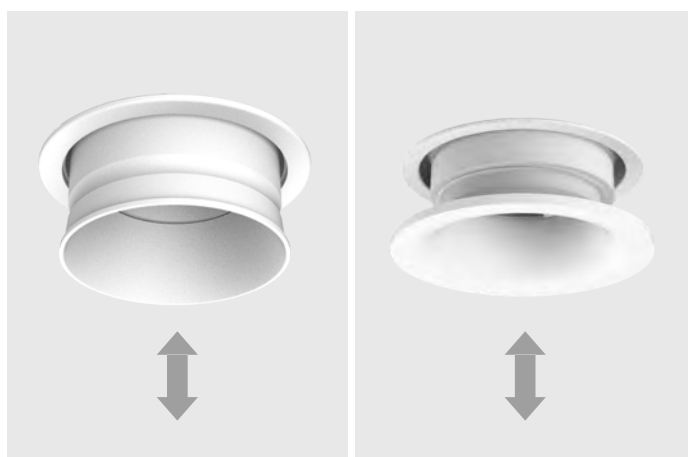

OPTIONAL

- FINISH OPTIONAL** ● :Standard
- Finish body ●  WH  BK
- Finish inside(A2441) ●  WH  BK
-  Clear glass
-  Frosted glass
Wide beam angle







IP44



IP44

A2531

 **GU10**



LED-PAR16


1x 7W max

 **GU5.3**



LED-MR16

1x 7W max



78x78mm

A0491

 **GU10**



LED-PAR16



1x 7W max

 **GU5.3**



LED-MR16

1x 7W max



80x80mm



OPTIONAL

FINISH OPTIONAL • :Standard

Finish body •  WH •  BK

 Frosted glass
Wide beam angle

 Clear glass





ANTI-GLARE RECESSED DOWN LIGHTS

Recessed light source.
With pre-installation bracket.
Die-cast aluminum housing.
Anti glare design.
Easy installation(to change the bulb).



A2171/A2241



A2371/A2321



A0571/A0581




A1041






A2241

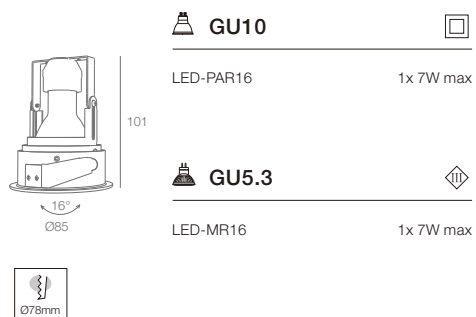

A2171

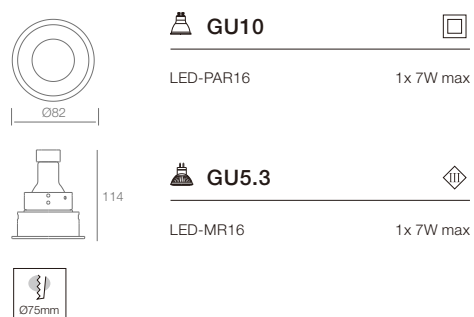

A2241



A2171

OPTIONAL

FINISH OPTIONAL ● :Standard

Finish body ● ☐ WH ☒ BK

Finish inside ● ☐ WH ☒ BK ☐ GY(metal)
only for A2171







A2371



Ø86
24°
360°



87(GU10)
80(GU5.3)

 **GU10**

LED-PAR16

1x 7W max


 **GU5.3**

LED-MR16

1x 7W max



A2321



Ø80

88(GU10)
69(GU5.3)

 **GU10**

LED-PAR16

1x 7W max

 **GU5.3**

LED-MR16


1x 7W max



OPTIONAL


FINISH OPTIONAL ● :Standard

Finish body ●  WH  BK

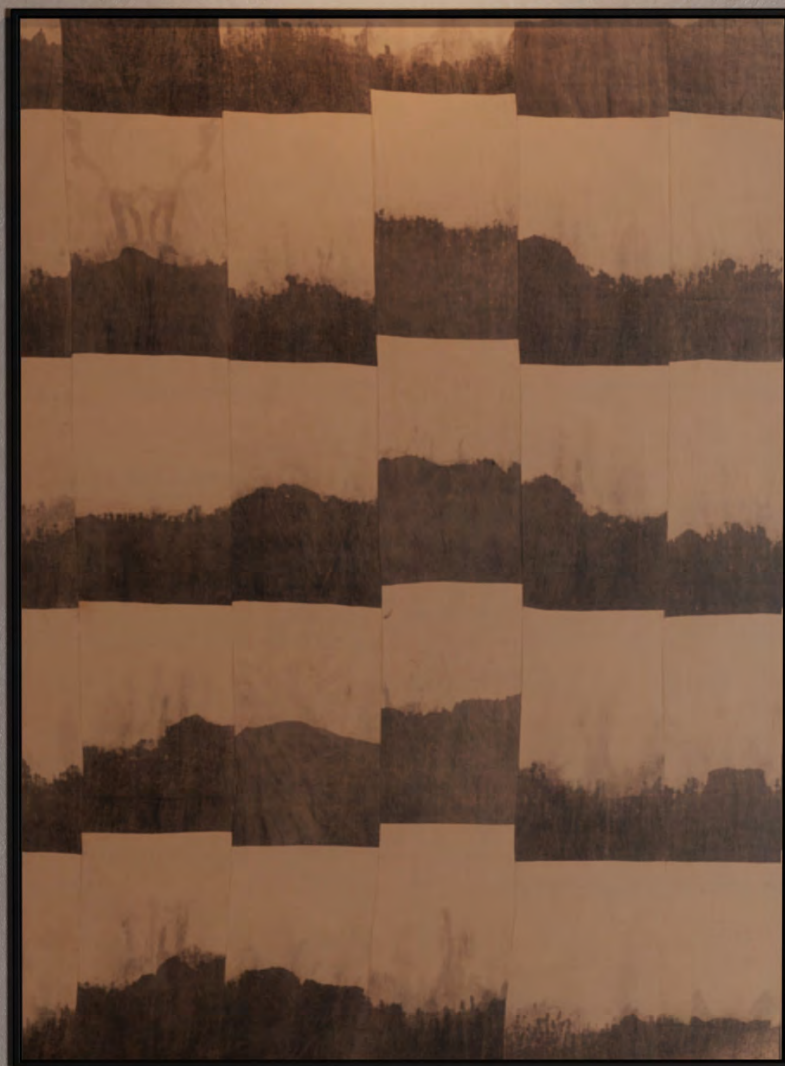




A0571

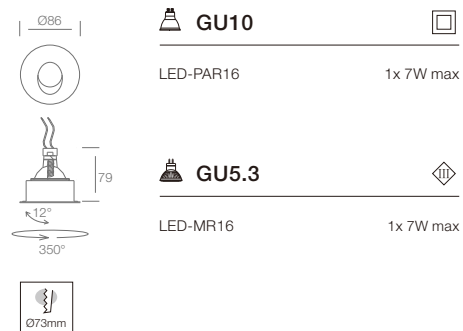

A0581

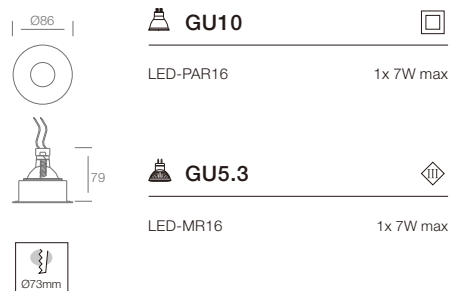

OPTIONAL


FINISH OPTIONAL ● :Standard

Finish body ● ☐ WH ☒ BK





A1041



GU10



LED-PAR16

1x 7W max

GU5.3



LED-MR16

1x 7W max

OPTIONAL

FINISH OPTIONAL ● :Standard

Finish body ● ☐ WH ☒ BK



SQUARE RECESSED DOWN LIGHTS

Recessed light source.
With pre-installation bracket.
Die-cast aluminum housing.



A2331




A2131



A0481



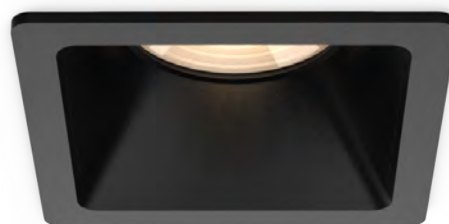


A2331

 **GU10**



LED-PAR16

1x 7W max



 **GU5.3**



LED-MR16

1x 7W max



78x78mm



OPTIONAL


FINISH OPTIONAL ● :Standard

Finish body ●  WH ●  BK






A0481

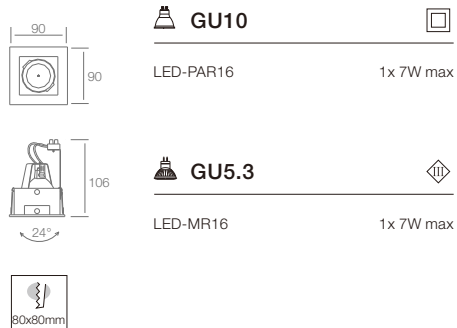

A2131

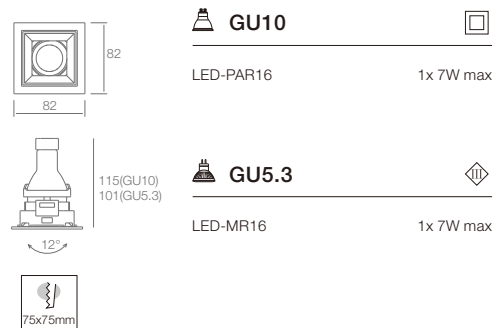

OPTIONAL

FINISH OPTIONAL • :Standard

Finish body •  WH •  BK



SINGLE RING RECESSED DOWN LIGHTS

Recessed light source.
With pre-installation bracket.
Die-cast aluminum housing.
Anti glare design.
Easy installation(to change the bulb).



A1381



A1382



A1391




A1392






A1381



Ø104mm

A1382



205x104mm


 **GU10**



LED-PAR16


1/2x 7W max

A1391



Ø104mm

A1392



205x104mm

 **GU5.3**



LED-MR16

1/2x 7W max

OPTIONAL

FINISH OPTIONAL ● :Standard

Finish body ● ☐ WH ☒ BK

Finish inside ● ☒ BK



DOUBLE RINGS RECESSED DOWN LIGHTS

Recessed light source.
With pre-installation bracket.
Die-cast aluminum housing.
Anti glare design.
Easy installation(to change the bulb).



A1341



A1342




A1343







A1341



A1342



A1343



GU10



LED-PAR16


1/2/3x 7W max

GU5.3



LED-MR16

1/2/3x 7W max

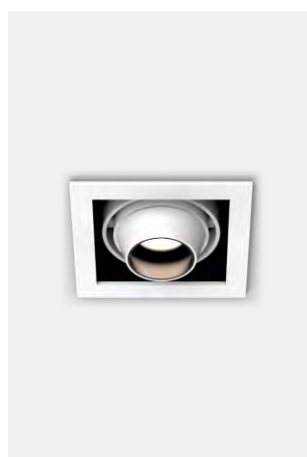

ACCESSORY



OPTIONAL

FINISH OPTIONAL

Finish body ☐ WH ☒ BK
Finish inside ☐ BK





TRACK LIGHTS

Extruded aluminum material.
Electrostatic sand powder coating.
No external screws.
Four different colour options.
Anti glare design.
Easy installation(to change the bulb).



D8111



D8161



OPTIONAL

ADAPTER



Adapter of 1-phase (2 wires)



Adapter of 1-phase (3 wires)



Adapter of 3-phase (4 wires)


LIGHTING FILTER



ACCESSORY



Honeycomb

**D8111** **GU10**

LED-PAR16

1x 7W max

 **COB** 3000K/Ang. 24°/Ra≥80

CXA1512

1x 15W(350mA)

**OPTIONAL****FINISH OPTIONAL** ● :StandardFinish body ●  WH  BKFinish inside ●  BK**COB BEAM ANGLE** ● :Standard●  Ang. 24°  Ang. 36°  Ang. 15°**COB COLOR TEMP** 3000K  4000K



OPTIONAL

ADAPTER



Adapter of 1-phase (2 wires)



Adapter of 1-phase (3 wires)



Adapter of 3-phase (4 wires)




D8161

 GU10



LED-PAR16

1x 7W max



OPTIONAL

FINISH OPTIONAL ● :Standard

Finish body ● ☐ WH ☒ BK

Finish inside ● ☒ BK





SURFACE LIGHTS

Extruded aluminum material.
Electrostatic sand powder coating.
No external screws.
Four different colour options.
Anti glare design.
Easy installation(to change the bulb).



C6591



C6881



C6741/C6742



C6701



C6871



C6481/C6431/C6432



C6321/C6322



**C6591** **GU10**95(GU10)
135(15W)

Ø68.5


LED-PAR16

1x 7W max


 **COB** 3000K/Ang. 24°/Ra≥80

CXA1512

1x 15W(350mA)

**OPTIONAL****FINISH OPTIONAL** ● :StandardFinish body ●  WH  BKFinish inside ●  BK**COB BEAM ANGLE** ● :Standard●  Ang. 24°  Ang. 36°  Ang. 15°**COB COLOR TEMP** 3000K  4000K**LIGHTING FILTER****ACCESSORY** Honeycomb



**C6881** **COB** 3000K/Ang. 24°/Ra>80

CXA2520

1x 15W(350mA)

**OPTIONAL****FINISH OPTIONAL** :StandardFinish body  WH  BKFinish inside  BK**COB BEAM ANGLE** :Standard Ang. 24°  Ang. 36°  Ang. 15°**COB COLOR TEMP** 3000K  4000K





C6741

 GU10



60x60

LED-PAR16

1x 7W max

C6742

 GU10



120x60

LED-PAR16

2x 7W max




OPTIONAL

FINISH OPTIONAL ● :Standard

Finish body ● ☐ WH ☒ BK

Finish inside ● ☒ BK

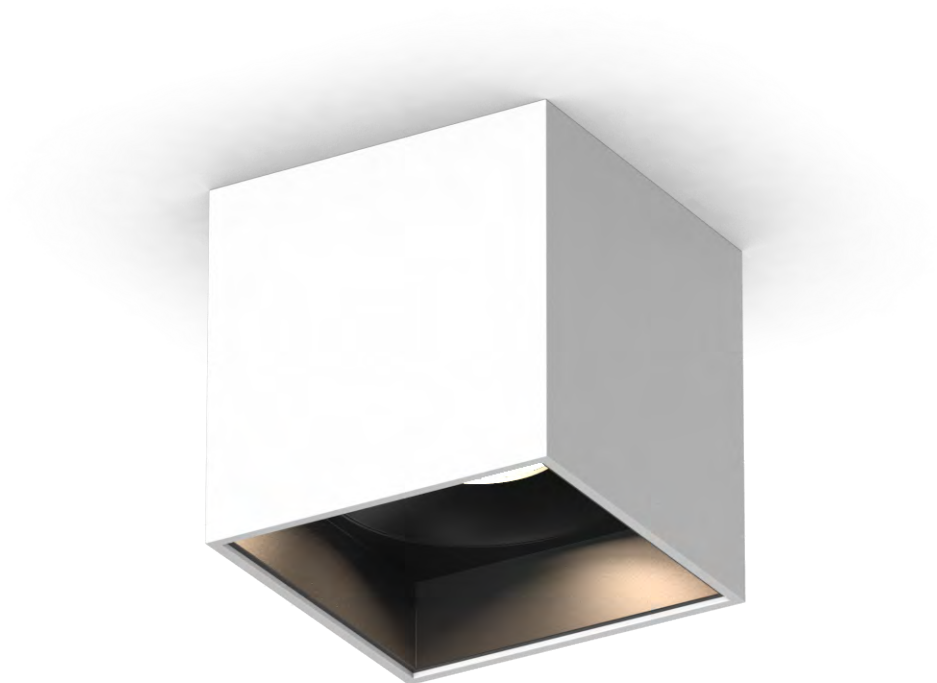

**C6701** **COB** 3000K/Ang. 24°/Ra≥80

100x100

100
110(Phase)

CXA1512

1x 15W(350mA)


**OPTIONAL****FINISH OPTIONAL** ● :StandardFinish body ●  WH ●  BKFinish inside ●  BK**COB BEAM ANGLE** ● :Standard●  Ang. 24° ●  Ang. 36° ●  Ang. 15°**COB COLOR TEMP**●  3000K ●  4000K





C6871

 **GU10**



LED-PAR16

1x 7W max




OPTIONAL

FINISH OPTIONAL ● : Standard


Finish body ● ☐ WH ☒ BK

Finish inside ● ☒ BK




LIGHTING FILTER



ACCESSORY



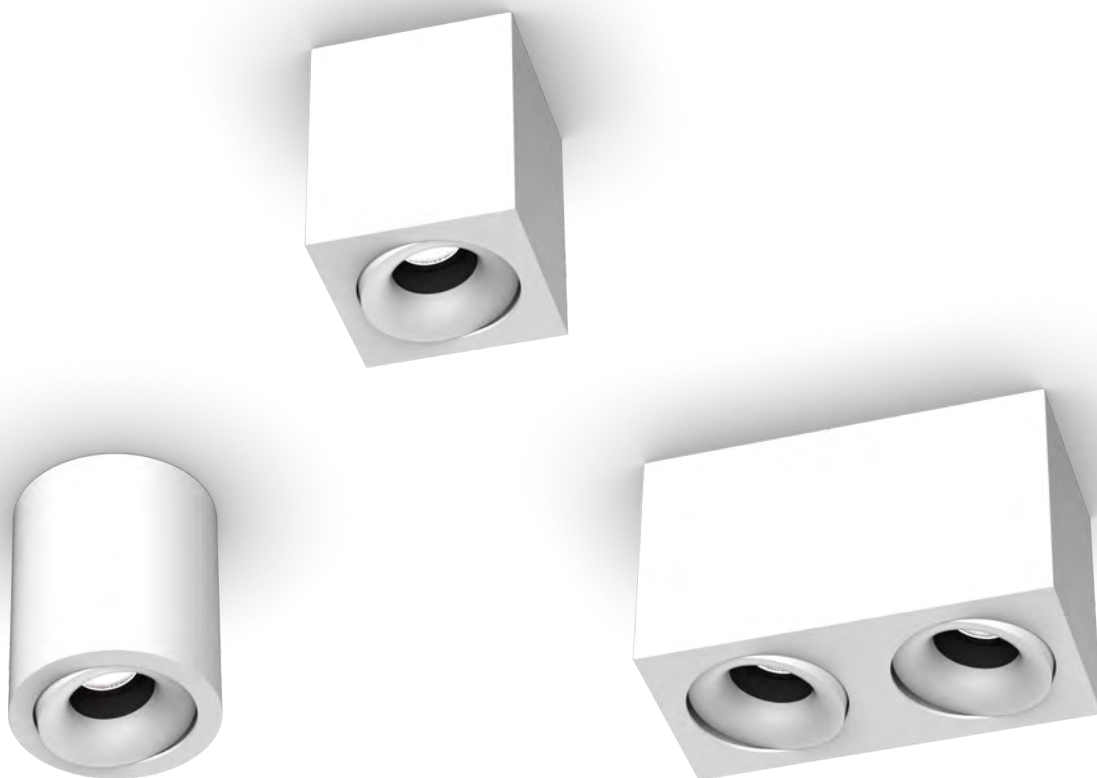

**C6481****C6431** **GU10**


LED-PAR16

1x 7W max

 GU5.3

LED-MR16

1x 7W max

C6432 **GU10**

LED-PAR16


2x 7W max


 GU5.3

LED-MR16

2x 7W max

OPTIONAL**FINISH OPTIONAL** ● :StandardFinish body ●  WH  BKFinish inside ●  BK



**C6321**

GU10



LED-PAR16

1x 7W max




GU5.3



LED-MR16

1x 7W max

C6322

GU10



LED-PAR16

2x 7W max




GU5.3



LED-MR16

2x 7W max

**ACCESSORY**

A

B

OPTIONAL**FINISH OPTIONAL** ● :StandardFinish body ●  WH  BKFinish inside ●  BK

INDOOR ACCESSORIES

2 WIRES TRACK



2-wires track
P0001



Straight connector mini
P0002



L-Connector
P0003



T-Connector
P0004



X-Connector
P0005

COLOR OPTIONS

☐ WHITE ☒ BLACK

OPTIONS

1 Meter / 1.5 Meter / 2 Meter

3 WIRES TRACK



3-wires track
P0011



Straight connector mini
P0012



L-Connector
P0013



T-Connector
P0014



X-Connector
P0015

COLOR OPTIONS

☐ WHITE ☒ BLACK

OPTIONS

1 Meter / 1.5 Meter / 2 Meter

4 WIRES TRACK



4-wires track
P0021



Straight connector mini
P0022



L-Connector
P0023



T-Connector
P0024



X-Connector
P0025

COLOR OPTIONS


☐ WHITE ☒ BLACK

OPTIONS

1 Meter / 1.5 Meter / 2 Meter

INDOOR ACCESSORIES

TOOLS



**GU10
Installation tool**
P0061



**Honeycomb
Installation tool**

DRIVER BOX



12V Driver box
P0091



**box cover
-small**
P0094

LIGHTS ACCESSORIES



Honeycomb
P0064



**Lighting Filter
Red**
P0066



**Lighting Filter
Yellow**
P0067



**Lighting Filter
Blue**
P0068



**Lighting Filter
Green**
P0069

OUTDOOR ACCESSORIES



P68 Connector
P0138



T9350 Visor
P0120



T9350 Shield
P0121



T9350
Mounting pole
P0124

T9358
Mounting pole



T9350
Flange
P0139

T9356
Flange
P0130



T9350
Stake(aluminum)
P0125

T9350
Stake(ABS)
P0133

T9356
Stake(aluminum)
P0131

T9356
Stake(ABS)
P0132

T9359
Stake(aluminum)
P0134

T9359
Stake(ABS)
P0135



H9932 Shield
P0111



H9934 Shield
P0112



J type mounting
plate-Ø90
P0151

J type mounting
plate-T9238
P0161

J type mounting
plate-T9232/T9241
P0162



J type mounting
plate-Ø150/180
P0152



J type mounting
plate-150*150
/180*180
P0154



Decorative base
cover-T9238
P0171



J type mounting
plate-300*300
P0156



Decorative base
cover-L9891
P0174

Decorative base
cover-L9888
P0177



Lighting Filter
Red
P0162



Lighting Filter
Yellow
P0163



Lighting Filter
Blue
P0164



Lighting Filter
Green
P0165

Ordinary.....	IP20		No symbol
Drip-proof.....	IPX1		(One drop)
Rain-proof.....	IPX3		(One drop in a square)
Splash-proof.....	IPX4		(One drop in a triangle)
Jet-proof.....	IPX5		(Two triangles with one drop in each)
Powerful water jet-proof.....	IPX6		No symbol
Watertight(immersible).....	IPX7		(Two drops)
Pressure-watertight (submersible).....	IPX8	m	(Two drops followed by an indication of the maximum depth of submersion in metres)
Protected against solid objects greater than 2,5 mm.....	IP3X		No symbol
Protected against solid objects greater than 1 mm.....	IP4X		No symbol
Dust-proof.....	IP5X		(A mesh without a frame)
Dust-tight.....	IP6X		(A mesh with a frame)

Protection against electric shock



CLASS I

The protection is based, further to the principal insulation, on the connection of the accessible conducting parts to an earth wiring.



CLASS II

The protection is based on the principal insulation and supplementary measures same as the double insulation. The luminaire does not need to be earthed.



CLASS III

Class III luminaire supplied with low voltage (12V,24V). The luminaire does not need to be earthed.

Quality marks



Products have been subjected to stringent safety control tests. Products respect the European quality standard as NEK_EN 60598-21 and NEK_EN 60598-1.



VDE, the Association for Electrical, Electronic & Information Technologies is one of the largest technical and scientific associations in Europe. In many countries, VDE certification is even more popular than the local certification. The VDE is particular recognized and valued by exporters. LEO'S major electric components are approved by the VDE.

RoHS

It's a mandatory standard set by The European Union, to standardize materials and Process standards, making it more beneficial to human health and the environment protection. Our products comply with the standards.

IEC60598

IEC60598 is one of the safety standards for lamp set by the International Electrotechnical Commission. Our products comply with IEC60598 standards.

LEO's LIGHTING & PROJECT CO.,LTD.

Office: 613 Room, Building 3, Poly ZhongDa Plaza
XinAn Road, TianHe District
GuangZhou City,
GuangDong Province China.

P.C: 510623

TEL: (86)020-38011712
(86)020-38011713

LEO's LIGHTING & ELECTRIC CO.,LTD.

Factory: LUTANG DASHANJIAO INDUSTRY DISTRICT LUOCUN,
SHISHAN TOWN, NANHAI FOSHAN CITY,
GUANGDONG PROVINCE,
CHINA

P.C: 528000

TEL: (86)757-8643 3200
(86)757-8643 3138

E-mail address

E-mail: leolighting@leolighting.com.cn.cn
sales04@leolighting.com.cn.cn



<http://www.leolighting.com.cn.cn>